

**PORTABLE BLOWERS
DIRECT DRIVE**



- MOTOR:** Single phase, ball-bearing, permanently lubricated, PSC type
- BLADE:** Steel hub, spider, & paddles
- SWITCH:** Rocker
- CORD:** 12' long SJT type 3 conductor
- GUARD:** Sprial steel wire coated (front & rear)
- WHEELS:** 8" rubber
- HOUSING:** Corrosion & dent resistant high density polyethylene black housing



SHIPS FULLY ASSEMBLED

| MODELS | BLADE SIZE | MOTOR TYPE | MOTOR HP | CFM MAX. VELOCITY | COVERAGE AREA SQ.FT. | AMPS | PRICE EACH |
|---------|------------|--------------|----------|-------------------|----------------------|------|-----------------|
| PB 36-D | 36" | Direct Drive | 1/3 | 6,500 | 320 | 5.5 | \$418.00 |
| PB 42-D | 42" | | 1/2 | 9,000 | 340 | 6.0 | \$587.95 |

Meets Federal OSHA Requirements / 1 Year LIMITED WARRANTY

**PORTABLE BLOWERS
BELT DRIVE**



- MOTOR:** Single phase, ball-bearing, permanently lubricated, capacitor start
- BLADE:** Steel hub, spider, & aluminum paddles (48" steel)
- SWITCH:** Rocker
- CORD:** 12' long SJT type 3 conductor
- GUARD:** Sprial steel wire coated (front & rear)
- WHEELS:** 10" rubber, 1" thick
- HOUSING:** Corrosion & dent resistant high density polyethylene black housing



SWIVEL MODEL

STANDARD MODEL

10" RUBBER WHEELS
SWIVEL MODELS ROTATE 360°
SHIPS FULLY ASSEMBLED

| MODELS | | BLADE SIZE | MOTOR TYPE | MOTOR HP | CFM MAX. VELOCITY | COVERAGE AREA SQ.FT. | AMPS | PRICE EACH | |
|----------|----------|------------|------------|----------|-------------------|----------------------|------|-----------------|-----------------|
| STANDARD | SWIVEL | | | | | | | STANDARD | SWIVEL |
| PB 36-B | PBS 36-B | 36" | Belt Drive | 1/2 | 14,000 | 360 | 8.0 | \$621.50 | \$732.05 |
| PB 42-B | PBS 42-B | 42" | | 3/4 | 17,500 | 420 | 11.0 | \$710.05 | \$842.05 |
| PB 48-B | PBS 48-B | 48" | | 1 | 23,500 | 550 | 15.0 | \$796.95 | \$948.75 |

Meets Federal OSHA Requirements / 1 Year LIMITED WARRANTY



30" INDUSTRIAL AIR CIRCULATOR HIGH PERFORMANCE 1/3 HP

FAN HEAD ASSEMBLED AT FACTORY TO SIMPLIFY INITIAL SETUP

- MOTOR:** 2-Speed, 1/3 HP, 120V, single phase, totally enclosed (TEAO), ball bearing, PSC type
BLADE: Steel hub, spider, with aluminum paddles
SWITCH: Pull Chain
CORD: 12' long SJT type 3 conductor
GUARD: Spriral steel wire coated (front & rear)
POLE: Pedestal pole adjusts center of fan from 48" - 67"



High performance 1/3 HP motor runs 15% - 18% cooler than standard 1/4 HP motors & allows fan to continue operating in air temperatures up to 135°F



FAN HEAD (IHP30-H)
\$257.40



PEDESTAL (ACM-P)
\$105.60



WALL MOUNT (ACM-W)
\$41.25



I-BEAM MOUNT (ACM-I)
\$80.30



CEILING MOUNT (ACM-C)
\$44.55

| MODEL | BLADE SIZE | MOTOR TYPE | FAN TYPE | MOTOR HP | CFM MAX. VELOCITY | COVERAGE AREA SQ.FT. | AMPS | PRICE EACH |
|----------|------------|------------------|-----------------|----------|-------------------|----------------------|------|-----------------|
| IHP 30-H | 30" | Totally Enclosed | Non-Oscillating | 1/3 | 7,200 | 250 | 3.0 | \$257.40 |

Must order fan head and mount separately

3 Year Motor Warranty

24" & 30" INDUSTRIAL AIR CIRCULATORS OSCILLATING & NON-OSCILLATING 1/4 HP

ALL FAN COMPONENTS SHIPPED IN ONE UPS-ABLE CARTON



- MOTOR:** 2-Speed, 1/4 HP, 120V, single phase, totally enclosed (TEAO), ball bearing, PSC type
BLADE: Steel hub, spider, with aluminum paddles
SWITCH: Pull Chain
CORD: 12' long SJT type 3 conductor
GUARD: Spriral steel wire coated (front & rear)
POLE: Pedestal pole adjusts center of fan from 48" - 67"

Oscillates horizontally in a 90° arc or can be locked in a fixed position

Metal gears in the oscillating mechanism allow the fan to operate at a maximum 30° downward tilt



ACU 30-WO



ACU 30-P

| MODELS | BLADE SIZE | MOTOR TYPE | FAN TYPE | FAN MOUNT | MOTOR HP | CFM MAX. VELOCITY | COVERAGE AREA SQ.FT. | AMPS | PRICE EACH |
|-----------|------------|------------------|-----------------|-----------|----------|-------------------|----------------------|------|-----------------|
| ACU 24-P | 24" | Totally Enclosed | Non-Oscillating | Pedestal | 1/4 | 6,000 | 240 | 2.5 | \$248.05 |
| ACU 30-P | 30" | | | | | 7,200 | 250 | 2.7 | \$255.20 |
| ACU 24-W | 24" | | | Wall | | 6,000 | 240 | 2.5 | \$206.80 |
| ACU 30-W | 30" | | | | | 7,200 | 250 | 2.7 | \$213.95 |
| ACU 30-PO | 30" | | Oscillating | Pedestal | 1/4 | 6,000 | 240 | 2.5 | \$383.90 |
| ACU 30-WO | | | | | | Wall | 7,200 | 250 | 2.7 |

Models include fan motor, grills, and mount in one carton.

1 Year Motor Warranty

30" INDUSTRIAL AIR CIRCULATOR HEAVY DUTY - SAFETY YELLOW 1/2 HP

FAN HEAD ASSEMBLED AT FACTORY TO SIMPLIFY INITIAL SETUP

- MOTOR:** 2-Speed, 1/2 HP, 120V, single phase, totally enclosed (TEAO), ball bearing, PSC type
- BLADE:** Steel hub, spider, with aluminum paddles
- SWITCH:** Pull Chain
- CORD:** 12' long SJT type 3 conductor
- GUARD:** Sprial steel wire coated (front & rear)
- POLE:** Pedestal pole adjusts center of fan from 48" - 67"



FAN HEAD (HDH 30-H)
\$343.75

PEDESTAL (HDM-P)
\$112.20

SAFETY
YELLOW
COLOR

Must order fan head and mount separately

| MODEL | BLADE SIZE | MOTOR TYPE | FAN TYPE | MOTOR HP | CFM MAX. VELOCITY | COVERAGE AREA SQ.FT. | AMPS | PRICE EACH |
|--------|------------|------------------|-----------------|----------|-------------------|----------------------|------|------------|
| HDH 30 | 30" | Totally Enclosed | Non-Oscillating | 1/2 | 8,000 | 270 | 4.0 | \$343.75 |

Meets Federal OSHA Requirements / 5 Year Motor Warranty

INDUSTRIAL FLOOR FANS

- MOTOR:** 3-Speed, 1/8 HP, 120V, single phase, sleeve-bearing, totally enclosed (TEAO), permanently lubricated, PSC type
- BLADE:** Steel hub, spider, with aluminum paddles
- SWITCH:** Rotary
- CORD:** 10' long SJT type 3 conductor
- GUARD:** Sprial steel wire coated (front & rear)



F-18-TE

F-18H-TE

ALL METAL CONSTRUCTION
TOTALLY ENCLOSED MOTOR

| MODELS | BLADE SIZE | MOTOR TYPE | FAN TYPE | MOTOR HP | CFM MAX. VELOCITY | COVERAGE AREA SQ.FT. | AMPS | PRICE EACH |
|----------|------------|------------------|------------|----------|-------------------|----------------------|------|------------|
| F-12-TE | 12" | Totally Enclosed | Floor | 1/12 | 1,400 | 50 | 1.1 | \$81.40 |
| F-18-TE | 18" | | | 1/8 | 2,900 | 125 | 2.2 | \$101.75 |
| F-24-TE | 24" | | | 1/8 | 3,500 | 150 | 2.4 | \$188.10 |
| F-18H-TE | 18" | | High Stand | 1/8 | 2,900 | 125 | 2.2 | \$147.95 |
| F-24H-TE | 24" | | | | 3,500 | 150 | 2.4 | \$247.50 |

Meets Federal OSHA Requirements / 1 Year LIMITED WARRANTY

INDUSTRIAL WORKSTATION FANS

- MOTOR:** 3-Speed, 120V, single phase, sleeve-bearing, totally enclosed, permanently lubricated, PSC type
- SWITCH:** Pull Chain
- CORD:** 10' long SJT type 3 conductor
- GUARD:** Sprial coated steel wire, FDA white/gray



Totally Enclosed Motor Fans
U-TE Series
Gray grill & black yoke

Corrosion Resistant Fans
U-CR Series
White grill & black yoke



SHIPPED FULLY ASSEMBLED

MOUNTS TO:

MACHINES, WORKBENCHES, CEILING, OR
WALLS WITH ONE BOLT OR LAG SCREW

| MODELS | BLADE SIZE | MOTOR TYPE | MOTOR HP | CFM MAX. VELOCITY | COVERAGE AREA SQ.FT. | AMPS | PRICE EACH |
|---------|------------|---------------------|----------|-------------------|----------------------|------|------------|
| U-12-TE | 12" | Totally Enclosed | 1/12 | 1,400 | 50 | 1.1 | \$84.70 |
| U-18-TE | 18" | | 1/8 | 2,900 | 125 | 2.2 | \$104.50 |
| U-24-TE | 24" | | 1/8 | 3,500 | 150 | 2.4 | \$195.80 |
| U-18-CR | 18" | Corrosion Resistant | 1/8 | 2,900 | 125 | 2.2 | \$212.85 |
| U-24-CR | 24" | | | 3,500 | 150 | 2.4 | \$243.65 |

Meets Federal OSHA Requirements / 1 Year LIMITED WARRANTY



INDUSTRIAL SHUTTER MOUNTED EXHAUST FANS

- MOTOR:** Single phase, ball-bearing, permanently lubricated, PSC type
BLADE: Steel hub, spider, & paddles
SWITCH: Rocker
CORD: 12' long SJT type 3 conductor
GUARD: Sprial steel wire coated (front & rear)
WHEELS: 8" rubber
HOUSING: Corrosion & dent resistant high density polyethylene black housing



| MODELS | BLADE SIZE | MOTOR TYPE | MOTOR BEARING | MOTOR HP | CFM | | | AMPS | PRICE EACH |
|----------|------------|------------------|---------------|----------|-------|--------|-------|-----------------|-----------------|
| | | | | | HIGH | MEDIUM | LOW | | |
| CE 12-DS | 12" | Totally Enclosed | Sleeve | 1/12 | 825 | 710 | 560 | 1.1 | \$194.15 |
| CE 14-DS | 16" | | | 1/8 | 2,100 | 1,900 | 1,700 | 2.1 | \$257.40 |
| CE 18-DS | 18" | | 1/4 | 2,300 | 2,100 | 1,850 | 2.2 | \$279.95 | |
| CE 20-DS | 20" | | Ball | 1/4 | 2,925 | N/A | 2,380 | 2.3 | \$331.65 |
| CE 24-DS | 24" | 1/4 | | 3,400 | N/A | 150 | 2.5 | \$369.05 | |

Meets Federal OSHA Requirements / 1 Year LIMITED WARRANTY

INDUSTRIAL LOADING DOCK FAN

- ARM:** 1 1/2" square, triple-arm strut, 14-gauge steel tubing
FINISH: Chip resistant safety yellow & black powder coated
CORD: 5' long SJT type 3 conductor
FAN: 18" all metal fan with 3-speed, 1/8 HP, PSC totally enclosed motor, 2.2A, 120V

40" DOCK ARM REACH



Light head sold separately.

| LIGHT HEAD TYPE | MAX WATTS | MAX LUMENS | AVG BULB LIFE (HRS) | INCLUDED | |
|-----------------|-----------|------------|---------------------|----------|-------|
| | | | | BULB | GUARD |
| Incandescent | 300 | 3,700 | 2,000 | No | Yes |
| LED | 37 | 12,373 | 30,000 | Yes | No |



40-LDF-TE
(40" Arm & 18" Fan Head)
\$213.40

DKL-INC
(Incandescent)
\$44.00

DKL-LED-37
(LED)
\$176.00

Meets Federal OSHA Requirements / 1 Year LIMITED WARRANTY

INDUSTRIAL CEILING FANS

COMMERCIAL GRADE


- Assembly required
- 30" lead wires
- 1 year limited warranty

INDUSTRIAL GRADE

- Fully assembled except blade bolt down
- 3 conductor cord, 30" long with plug
- Permanently lubricated
- 3 year limited warranty

HEAVY DUTY GRADE

- Fully assembled except blade bolt down
- 3 conductor cord, 30" long with plug
- Permanently lubricated
- 6 year limited warranty

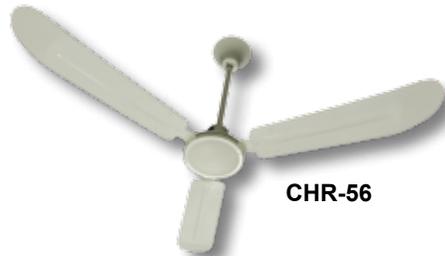

CHR-56

MOTOR: 18 pole, 115V, 1-phase, capacitor type, impedance protected motor with sealed ball bearings

MOUNT: 24" down rod with safety cable. Mount to 3/8" diameter steel J-hook

MATERIAL: All metal construction with white epoxy finish

56" Down Draft (CHR-56)
\$100.10

56" Reversible (IHR-56R)
\$144.65

60" Down Draft Water/Dust Resistant (HDHR-60WR)
\$224.40

DISTRIBUTED BY:

To Order to Inquire Please Contact
 Dick Jones Sales, Inc.
 PO Box 141
 258 Baltimore Street
 Hanover, PA 17331
 P 800-441-9955
 F 800-253-4036
 dickjones@dickjonessales.com