


Order From  
 Dick Jones Sales, Inc.  
 258 Baltimore St. PO Box 141  
 Hanover, PA 17331  
 Phone 800-441-9955  
 Fax 800-253-4036  
 dickjones@dickjonesales.com

# FACILITY MAINTENANCE



**SPEED BUMPS & CAR STOPS**



**INDUSTRIAL FANS**



**FLOOR TAPE APPLICATORS**



**PICNIC TABLES & BENCHES**



**BUILDINGS & SHELTERS**



**INDUSTRIAL & COMMERCIAL SIGNAGE**

Speed Bumps & Car Stops <b>R</b> .....	B2-B5
Industrial Fans & Air Conditioners <b>R</b> .....	B6 & B7
Heaters <b>R</b> .....	B8 to B9
Floor Tape Applicators <b>I</b> .....	B10
Magnetic Push Sweepers <b>I</b> .....	B11
Acrylic Convex Mirrors <b>R</b> .....	B11
Picnic Tables & Benches <b>R I</b> .....	B12 & B13
Trash Receptacles <b>R</b> .....	B14
Bicycles & Bicycle Racks <b>V R I</b> .....	B15
Hose Reels <b>R I</b> .....	B16
Warning Sirens <b>I</b> .....	B17
Buildings & Shelters <b>V I</b> .....	B18 & B19
Storage Lockers <b>I</b> .....	B20
Fuel Pumps <b>R</b> .....	B21 & B22
Sign Bases <b>R I</b> .....	B22 & B23
Expand-A-Gates <b>I</b> .....	B24
Industrial & Commercial Signage <b>V</b> .....	B25-B35



## Rumble Strips

A good and audible warning for motorists. These strips have a unique raised dot grip system, and special grooves for improved adhesion and made from a specially formulated glass-filled polymer material. This material is also UV stabilized and cold weather impact protected. Rumble strips can be permanently (epoxy) mounted.

MODEL NUMBER	OVERALL SIZE (W x L x H)	COLOR	QUANTITY	WEIGHT (POUND)
RMBS-24-Y	4" x 24" x 1/2"	YELLOW	1	12
RMBS-24-O	4" x 24" x 1/2"	ORANGE	1	12
RMBS-24-W	4" x 24" x 1/2"	WHITE	1	12
RMBS-ER	EPOXY RESIN, 2 GALLON KIT (installs 30 units)			20



## Heavy-Duty Parking Blocks / Speed Bumps

These are a guidance device that provides a physical deterrent or warning for motorists. Ideal for traffic calming, work zones, garages, edge drop off markings, bicycle lanes, parking lots, light rail, and driveways. Durable polymer material is chemical and weather resistant, which outlasts concrete and rubber products. Unique groove system provides easy installation and improved adhesion for epoxy glues. Bolt holes are provided for additional anchoring if needed. Units can be permanently (epoxy) or temporarily (butyl tape) mounted.

MODEL NUMBER	OVERALL SIZE (W x L x H)	COLOR	QUANTITY	WEIGHT (POUND)
HDPB-18-W	8" x 18" x 1 1/2"	WHITE	1	5
HDPB-18-Y	8" x 18" x 1 1/2"	YELLOW	1	5
HDPB-ER	EPOXY RESIN, 2 GALLON KIT (installs 30 units)			20
HDPB-BT	BUTYL PADS 3/16" x 8" x 8"			8 ROLLS



## Steel Dome Markers

Provide visible lane indication with these rugged Steel Dome Markers. Each unit has a pre-drilled hole in each corner for easier application. Mounting holes are 1/2" in diameter. Hardware sold separately.

MODEL NUMBER	OVERALL SIZE (W x L x H)	DOMES DIAMETER	CARTON QUANTITY	FINISH	WEIGHT (POUND)
DSB-6Y	7" x 7" x 2 1/2"	5 1/2"	6	POWDER COAT	12
AS-383-4PK	3/8" x 3" PACKAGE OF FOUR CONCRETE ANCHORS				2



## Raised Pavement Markers

These Pavement Markers serve as a physical and audible warning for motorists. Manufactured of polypropylene and uses the raised hexagon pattern to increase strength and adhesive surface area. Units can be permanently (epoxy) or temporarily (butyl tape) mounted.

MODEL NUMBER	DOMES DIAMETER	DOMES HEIGHT	COLOR	WEIGHT (POUND)
RPM-4-W	4"	3/4"	WHITE	1
RPM-4-Y	4"	3/4"	YELLOW	1
RPM-4-B	4"	3/4"	BLACK	1
RPM-ER	EPOXY RESIN, 2 GALLON KIT (installs 200 units)			20
RPM-BT	BUTYL PADS 3/16" x 8" x 8"			9



## Molded Rubber Speed Bumps

Heavy-duty molded rubber construction for durability. Rubber includes UV stabilizer for longer life. Features five reflective yellow diagonal strips and "cats eyes" per side for better visibility. Four mounting holes per speed bump with one mounting hole per end cap, hardware included. Maximum capacity is 40,000 pounds.

MODEL NUMBER	OVERALL SIZE (W x L x H)	TYPE	TYPE OF HARDWARE KIT INCLUDED	WEIGHT (POUND)
SBRY-72-C	11 3/4" x 72" x 1 3/4"	SPEED BUMP	CONCRETE	53
SBRY-CAP-C	11 3/4"W x 11 3/4"L	END CAPS	CONCRETE	16
SBRY-72-A	11 3/4" x 72" x 1 3/4"	SPEED BUMP	ASPHALT	55
SBRY-CAP-A	11 3/4"W x 14 1/2"L	END CAPS	ASPHALT	17

## Speed Bumps

Help control drivers in dangerous areas while protecting people and property. One person installation. Can be removed for seal coating, snow removal, or change of location. Resists marring by oil, road salt, sunlight, and chemicals. Feature dual 1" W x 3/4" H cable channels and includes hardware. Constructed of lightweight recycled plastic. Compression strength is 3,200 pounds per square inch. The concrete hardware kit includes bolts, anchors, and washers. Asphalt kit includes spikes and butyl tape. The glue down anchor plate kit includes anchor plates, T-nuts, bolts, and washers. Requires 2-3 ounces of either 2-part epoxy or heavy duty construction adhesive to the bottom of each anchor plate, which is not included.



MODEL NUMBER	OVERALL SIZE (W x L x H)	TYPE OF HARDWARE KIT INCLUDED	NUMBER OF MOUNTING HOLES	WEIGHT (POUND)
SB-48	10" x 48" x 2"	CONCRETE	3	17
SBA-48	10" x 48" x 2"	ASPHALT	3	19
SBHA-48	10" x 48" x 2"	HD ASPHALT	3	19
SBG-48	10" x 48" x 2"	GLUE-DOWN	3	17
SBD-48*	12" x 48" x 2 1/4"	CONCRETE	3	26
SBDA-48*	12" x 48" x 2 1/4"	ASPHALT	3	29
SBDHA-48*	12" x 48" x 2 1/4"	HD ASPHALT	3	29
SBDG-48*	12" x 48" x 2 1/4"	GLUE-DOWN	3	26
SB-36	10" x 72" x 2"	CONCRETE	4	26
SBA-36	10" x 72" x 2"	ASPHALT	4	29
SBHA-36	10" x 72" x 2"	HD ASPHALT	4	28
SBG-36	10" x 72" x 2"	GLUE-DOWN	4	26
SB-72	10 1/4" x 72" x 2"	CONCRETE	6	11
SBA-72	10 1/4" x 72" x 2"	ASPHALT	6	15
SBHA-72	10 1/4" x 72" x 2"	HD ASPHALT	6	15
SBG-72	10 1/4" x 72" x 2"	GLUE-DOWN	6	11
SBD-72*	12" x 72" x 2 1/4"	CONCRETE	4	37
SBDA-72*	12" x 72" x 2 1/4"	ASPHALT	4	40
SBDHA-72*	12" x 72" x 2 1/4"	HD ASPHALT	4	40
SBDG-72*	12" x 72" x 2 1/4"	GLUE-DOWN	4	37
SB-108	10" x 106" x 3"	CONCRETE	5	56
SBA-108	10" x 106" x 3"	ASPHALT	5	59
SBHA-108	10" x 106" x 3"	HD ASPHALT	5	59
SBG-108	10" x 106" x 3"	GLUE-DOWN	5	56
SBS-1012	REFLECTIVE SPEED BUMP SIGN			2
SBE-12**	END CAPS FOR STANDARD SPEED BUMPS			9

\*Models do not have cable channels.

\*\*End caps only work with 10" W x 2" H sized speed bumps  
See additional anchor kits on page B4.

For optional reflectors use suffix -RE.



48 Hours  
to Ship



model SBA-72



Features dual 1" x 3/4" cable channels



Series SBD does not have cable channels.  
model SBD-72



REFLECTIVE SPEED BUMP SIGN  
model SBS-1012




## SB & RSH Anchor Kits

The Anchor Kits are a great addition to the facility maintenance department. The kit supplies a solution to securing speed bumps to a surface. The unit is designed of a strong construction that is resilient and long lasting throughout the harshest environments. Once the anchoring is in place, the speed bumps are ready for use. The kit is available in both glue down and asphalt anchor style.



model SB-72-AK

SB OPTIONS			
MODEL NUMBER	DESCRIPTION	USE WITH # OF HOLES	WEIGHT (POUND)
SB-48-AK	ASPHALT KIT FOR 48 MODELS	3	4
SB-36-AK	ASPHALT KIT FOR 36 MODELS	4	4
SB-72-AK	ASPHALT KIT FOR 72 MODELS	6	6
SB-108-AK	ASPHALT KIT FOR 108 MODELS	5	5
SB-48-GDK	GLUE DOWN KIT FOR 48 MODELS	3	2
SB-36-GDK	GLUE DOWN KIT FOR 36 MODELS	4	3
SB-72-GDK	GLUE DOWN KIT FOR 72 MODELS	6	3
SB-108-GDK	GLUE DOWN KIT FOR 108 MODELS	5	3

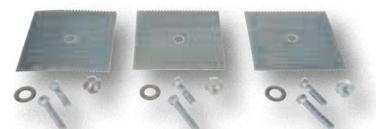

model SB-48-GDK



RSH OPTIONS			
MODEL NUMBER	DESCRIPTION	USE WITH LENGTH	WEIGHT (POUND)
RSH-108-HD-AK-KIT	HEAVY DUTY ASPHALT HARDWARE KIT	108	12
RSH-120-HD-AK-KIT	HEAVY DUTY ASPHALT HARDWARE KIT	120	14
RSH-GD-16	GLUE DOWN HARDWARE KIT	108	22
RSH-GD-24	GLUE DOWN HARDWARE KIT	120	30



model RSH-GD-16



model CLB-5-78L

## Clearance Bars

Clearance Bars are low maintenance, highly visible, and simple to read. These easy to install clearance bars are made of 1/4" nominal wall lo-density polyethylene. Comes with eye hooks attached, chain not included. Standard lettering is "CLEARANCE" and specified height. Other colors and specified lettering available, contact factory.

MODEL NUMBER	OUTSIDE DIAMETER	LENGTH	LETTERING	COLOR	WEIGHT (POUND)
CLB-5-78P	5 1/4"	78"	NO	YELLOW	15
CLB-5-78L	5 1/4"	78"	YES	YELLOW	15
CLB-7-110P	7 1/2"	110"	NO	YELLOW	20
CLB-7-110L	7 1/2"	110"	YES	YELLOW	20



ECONOMY WARNING BARRIER • model ODG-121-F

## Overhead Door Warning Barriers




Protect overhead doors from fork truck damage. Heavy-duty PVC construction is lightweight and will not rust. Highly visible black and yellow safety tape and two American flags serve as a visual warning. Includes two 15' long chains with quick connects to hang barrier from ceiling or existing overhead door track.

Model ODG-133-BL features built-in warning sirens and flashing lights that activate when the barrier is bumped or contacted. Provides an audible and visual warning before damage to overhead door is caused. 76 DB at 9 feet. Requires (4) four 9V lithium batteries, not included.



DELUXE WARNING BARRIER • model ODG-133-BL


MODEL NUMBER	DESCRIPTION	OVERALL LENGTH	WEIGHT (POUND)
ODG-121-F	ECONOMY WARNING BARRIER	120"	63
ODG-133-BL	DELUXE WARNING BARRIER	120"	66

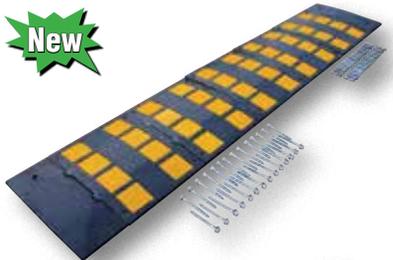

model RSH-108-24-C

## Rubber Speed Humps

The Rubber Speed Humps control traffic and reduce vehicle speeds. Ideal in neighborhoods, construction areas, hospitals, post offices, and airports. Can be removed for seal coating, snow removal, or change of location. Easy tongue and groove installation. Constructed of recycled and virgin rubber. Unit is black with yellow embedded highway tape to ensure high visibility. Complete modules include (5) five middle and (2) two end sections.

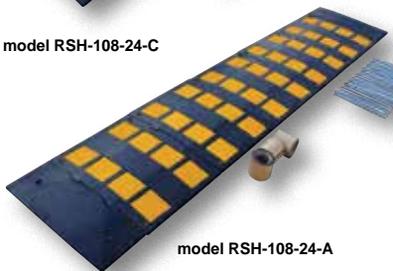


model RSH-108-24-A



model RSH-108-EF-C  
FEMALE END CAP



model RSH-108-EM-C  
MALE END CAP



model RSH-108-M-A  
MIDDLE SECTION

MODEL NUMBER	OVERALL SIZE (W x L x H)	DESCRIPTION	TYPE OF HARDWARE KIT INCLUDED	UNIFORM CAPACITY	REDUCE SPEEDS (MPH)	WEIGHT (POUND)
<b>DELUXE RUBBER SPEED HUMPS</b>						
RSH-108-24-C	23 1/2" x 108" x 1 3/8"	COMPLETE MODULE	CONCRETE	40,000 lb.	5-10	185
RSH-108-24-A	23 1/2" x 108" x 1 3/8"	COMPLETE MODULE	ASPHALT	40,000 lb.	5-10	194
RSH-120-36-C	35 1/4" x 120" x 2 7/16"	COMPLETE MODULE	CONCRETE	60,000 lb.	5-10	332
RSH-120-36-A	35 1/4" x 120" x 2 7/16"	COMPLETE MODULE	ASPHALT	60,000 lb.	5-10	346
<b>ADDITIONAL PIECES</b>						
RSH-108-EF-C	23 1/2" x 8 7/8" x 1 3/8"	END CAP (female)	CONCRETE	40,000 lb.	5-10	12
RSH-108-EF-A	23 1/2" x 8 7/8" x 1 3/8"	END CAP (female)	ASPHALT	40,000 lb.	5-10	12
RSH-108-EM-C	23 1/2" x 9 15/32" x 1 3/8"	END CAP (male)	CONCRETE	40,000 lb.	5-10	12
RSH-108-EM-A	23 1/2" x 9 15/32" x 1 3/8"	END CAP (male)	ASPHALT	40,000 lb.	5-10	12
RSH-108-M-C	23 1/2" x 20 5/16" x 1 3/8"	MIDDLE SECTION	CONCRETE	40,000 lb.	5-10	23
RSH-108-M-A	23 1/2" x 19 3/16" x 1 3/8"	MIDDLE SECTION	ASPHALT	40,000 lb.	5-10	23
RSH-120-EF-C	35 1/4" x 10 7/16" x 2 7/16"	END CAP (female)	CONCRETE	60,000 lb.	5-10	22
RSH-120-EF-A	35 1/4" x 10 7/16" x 2 7/16"	END CAP (female)	ASPHALT	60,000 lb.	5-10	22
RSH-120-EM-C	35 1/4" x 11 3/16" x 2 7/16"	END CAP (male)	CONCRETE	60,000 lb.	5-10	22
RSH-120-EM-A	35 1/4" x 11 3/16" x 2 7/16"	END CAP (male)	ASPHALT	60,000 lb.	5-10	22
RSH-120-M-C	35 1/4" x 20 5/16" x 2 7/16"	MIDDLE SECTION	CONCRETE	60,000 lb.	5-10	56
RSH-120-M-A	35 1/4" x 20 5/16" x 2 7/16"	MIDDLE SECTION	ASPHALT	60,000 lb.	5-10	56

See additional anchor kits on page B3.

## Car Stops

Protect people and property from drivers in dangerous areas. Constructed of lightweight recycled plastic. One person installation. Can be removed for seal coating, snow removal, or change of location. Resists marring by oil, road salt, sunlight, and chemicals. Resists rotting, termite damage, and corrosion. No costly painting or maintenance. Asphalt kit includes spikes and butyl tape. The concrete hardware kit includes bolts, anchors, and washers. The glue down anchor plate kit includes anchor plates, T-nuts, bolts, and washers. Requires two part epoxy, which is not included. Hardware kits sold separately.



series CS-33

model CS-S24-B

model CS-S24-Y

model CS-S48-Y

model CS-S48-G

model CS-33-BL



Model CS-33-BL is made of black, recycled rubber.

MODEL NUMBER	OVERALL SIZE (W x L x H)	COLOR	NUMBER OF MOUNTING HOLES	WEIGHT (POUND)
CS-33-G	6" x 72" x 3¼"	GRAY	3	27
CS-33-Y	6" x 72" x 3¼"	YELLOW	3	27
CS-33-B	6" x 72" x 3¼"	BLUE	3	27
CS-33-W	6" x 72" x 3¼"	WHITE	3	27
CS-33-BL	5¾" x 71¾" x 4"	BLACK & YELLOW	4	37
CS-S24-G	6" x 24" x 3¼"	GRAY	2	10
CS-S24-Y	6" x 24" x 3¼"	YELLOW	2	10
CS-S24-B	6" x 24" x 3¼"	BLUE	2	10
CS-S24-W	6" x 24" x 3¼"	WHITE	2	10
CS-S48-G	6" x 48" x 4"	GRAY	2	22
CS-S48-Y	6" x 48" x 4"	YELLOW	2	22
CS-S48-B	6" x 48" x 4"	BLUE	2	22
CS-S48-W	6" x 48" x 4"	WHITE	2	22
CS-S72-G	6" x 72" x 4"	GRAY	3	33
CS-S72-Y	6" x 72" x 4"	YELLOW	3	33
CS-S72-B	6" x 72" x 4"	BLUE	3	33
CS-S72-W	6" x 72" x 4"	WHITE	3	33
CS-TB96-G	10" x 96" x 7"	GRAY	4	134
CS-TB96-Y	10" x 96" x 7"	YELLOW	4	134
CS-TB96-B	10" x 96" x 7"	BLUE	4	134
CS-TB96-W	10" x 96" x 7"	WHITE	4	134

For optional reflectors use suffix -RE.

CAR STOP OPTIONS			
MODEL NUMBER	DESCRIPTION	USE WITH ABOVE NO. OF MOUNTING HOLES	WEIGHT (POUND)
CS-AK-2	ASPHALT HARDWARE KIT	2	3
CS-HD-AK-2	HEAVY DUTY ASPHALT HARDWARE KIT	2	2
CS-33-KIT-2	CONCRETE HARDWARE KIT	2	2
CS-GD-2	GLUE DOWN ANCHOR PLATE	2	2
CS-AK-3	ASPHALT HARDWARE KIT	3	4
CS-HD-AK-3	HEAVY DUTY ASPHALT HARDWARE KIT	3	3
CS-33-KIT-3	CONCRETE HARDWARE KIT	3	2
CS-GD-3	GLUE DOWN ANCHOR PLATE	3	3
CS-AK-4	ASPHALT HARDWARE KIT	4	4
CS-HD-AK-4	HEAVY DUTY ASPHALT HARDWARE KIT	4	4
CS-33-KIT-4	CONCRETE HARDWARE KIT	4	2
CS-GD-4	GLUE DOWN ANCHOR PLATE	4	3



ASPHALT KIT model CS-AK

CONCRETE KIT model CS-33-KIT-3



GLUE DOWN KIT model CS-GD-2

## Heavy Duty Asphalt Anchors

The Heavy Duty Asphalt Anchors are ideal for attaching items to an asphalt surface. The unit is designed of a strong construction that is resilient and long lasting throughout the harshest of environments. Once the anchors are in place, they promote safety and well-being by holding material in a secure position.

MODEL NUMBER	SHAFT DIAMETER	OVERALL DIAMETER	OVERALL LENGTH	QUANTITY	WEIGHT (POUND)
AS-HDA-12	1"	1⅝"	12"	1	1
AS-HDA-12-4PK	1"	1⅝"	12"	4	4
AS-HDA-12-6PK	1"	1⅝"	12"	6	6



model AS-HDA-12-6PK



model ICRF-24-P



## Industrial Duty Circulator Fans 115V 1-PHASE STANDARD

Two speed, 115V, 1 phase, ball bearing, totally enclosed and permanently lubricated Industrial Duty Circulator Fan. Pull chain switch with a 12 foot long cord and an SJT type 3 conductor cord. Meets OSHA standards and is ETL C/US listed. ¼ HP electric motor.

MODEL NUMBER	BLADE DIAMETER	MOUNTING STYLE	AMPS HIGH	CFM HIGH	CFM LOW	WEIGHT (POUND)
ICRF-24-P	24"	PEDESTAL	2.5	6800	5000	75
ICRF-24-W	24"	WALL	2.5	6800	5000	45
ICRF-30-P	30"	PEDESTAL	2.7	7900	6000	75
ICRF-30-W	30"	WALL	2.7	7900	6000	48
OSCILLATING STYLE						
ICRF-24-PO	24"	PEDESTAL	2.5	6800	5000	79
ICRF-24-WO	24"	WALL	2.5	6800	5000	49
ICRF-30-PO	30"	PEDESTAL	2.7	7900	6000	78
ICRF-30-WO	30"	WALL	2.7	7900	6000	53



model WSF-12



model WSF-18-F

## Work Station Fans 115V 1-PHASE STANDARD

Three speed, 115V, 1 phase, totally enclosed, permanently lubricated motor Work Station Fan. Mount with one bolt or lag screw to walls, ceilings, work benches, machines or any surface. Pull chain switch on a 10 foot long SJT type 3 conductor cord. Meets OSHA standards and is ETL C/US listed.

MODEL NUMBER	BLADE DIAMETER	MOUNTING STYLE	AMPS HIGH	CFM HIGH	CFM MED	CFM LOW	WEIGHT (POUND)
WSF-12	12"	WALL	1.1	1650	1420	1120	17
WSF-18	18"	WALL	2.2	4600	4200	3200	26
WSF-18-F	18"	FLOOR	1.5	4600	4200	3200	23



model HPCR-30-I

model HPCR-30-W

model HPCR-30-C

## High Performance Circulator Fans 115V 1-PHASE STANDARD

Two speed, 115V, 1 phase, ball bearing, totally enclosed, and permanently lubricated Industrial Duty Circulator Fan. Pull chain switch with a 12 foot long SJT type 3 conductor cord. Meets OSHA standards and is ETL C/US listed. ½ HP electric motor.

MODEL NUMBER	BLADE DIAMETER	MOUNTING STYLE	AMPS HIGH	CFM HIGH	CFM LOW	WEIGHT (POUND)
HPCR-30-P	30"	PEDESTAL	3.4	8200	6200	75
HPCR-30-W	30"	WALL	3.4	8200	6200	48
HPCR-30-I	30"	I-BEAM	3.4	8200	6200	51
HPCR-30-C	30"	CEILING	3.4	8200	6200	48



model PWSF-18H-TE



## Portable Work Station Fan 115V 1-PHASE STANDARD

The three (3) speed, ball bearing, Portable Work Station Fan is totally enclosed and permanently lubricated. This fan has a rotary switch, 360° tilting head, 10 foot long SJT type 2 conductor cord, and coated steel guard. Steel hub/spider aluminum paddle blades and meets OSHA standards. Overall size is 25"W x 27"L x 53"H. ETL C/US listed.

MODEL NUMBER	BLADE DIAMETER	MOUNTING STYLE	CFM HIGH	CFM MEDIUM	CFM LOW	WEIGHT (POUND)
PWSF-18H-TE	18"	PEDESTAL	4600	4200	3200	35



series SME



## Shutter Mounted Exhaust Fans 115V 1-PHASE STANDARD

Inside-building installation only with vents outside. Eliminate need for external framing and shutter. Ideally suited for thin wall buildings. Units are 115V, 1 phase totally enclosed and permanently lubricated. Pull chain switch. No cord. Junction box provided for direct wiring. Meets OSHA standards.

MODEL NUMBER	BLADE DIAMETER	MOTOR HP	AMPS HIGH	CFM HIGH	CFM MED	CFM LOW	WEIGHT (POUND)
SME-12	12"	1/12	1.1	825	710	560	16
SME-18	18"	1/8	2.2	2300	2100	1850	25
SME-24	24"	1/4	2.5	3400	---	2770	41
SME-30	30"	1/4	2.7	3950	---	3080	50

## Direct Drive Portable Blower 115V 1-PHASE STANDARD

The two speed, 115V, 1 phase, ball bearing, Portable Blower has a totally enclosed motor. The fan also features 3 paddle style steel blades and 8" rubber wheels. It has a rocker switch with a 15' SJT type 3 conductor power cord. Meets OSHA standards. ETL C/US listed.

MODEL NUMBER	BLADE DIAMETER	RPM HIGH	AMP HIGH	CFM HIGH	CFM LOW	WEIGHT (POUND)
DDB-36	36"	1100	5.5	12500	9000	110

model  
DDB-36



## Commercial Circulator Fans 115V 1-PHASE STANDARD

Two speed, 115V, 1 phase, ball bearing Commercial Circulator Fan. Pull chain switch with a 9 foot long cord and an SJT type 3 conductor cord. Meets OSHA standards and is UL listed. ¼ HP electric motor. These Circulator Fans do not have a totally enclosed motor. They should be used in a clean and dry commercial application.

MODEL NUMBER	BLADE DIAMETER	MOUNTING STYLE	AMPS HIGH	CFM HIGH	CFM LOW	WEIGHT (POUND)
CCRF-24-P	25"	PEDESTAL	2.3	5400	4300	63
CCRF-24-W	25"	WALL	2.3	5400	4300	43
CCRF-30-P	30"	PEDESTAL	2.4	6000	4800	66
CCRF-30-W	30"	WALL	2.4	6000	4800	46

model CCRF-30-W

model CCRF-30-P



## Commercial Belt Drive Portable Blower 115V 1-PHASE STANDARD

The two speed, ball bearing Commercial Circulator Fan is pull chain. Meets OSHA standards and is UL C/US listed. This fan does not have a totally enclosed motor and should be used in a clean and dry commercial application. Features 8 foot long SJT type 3 conductor cord and 8" rubber wheels.

MODEL NUMBER	BLADE DIAMETER	AMP HIGH	CFM HIGH	CFM LOW	WEIGHT (POUND)
DDB-C-42	42"	4.3	13500	11000	93

model DDB-C-42



## Commercial Direct Drive Blowers 115V 1-PHASE STANDARD

Two speed, 1/3 HP, 115V, 1 phase, ball bearing motor, permanently lubricated. Rocker switch (MB-C-30) or rotary switch (MB-RS-C-36) standard. 6 foot long SJT type 3 conductor cord. Meets OSHA standards and is UL listed. These Direct Drive Blowers do not have a totally enclosed motor. They should be used in a clean and dry commercial application.

MODEL NUMBER	BLADE DIAMETER	AMPS HIGH	CFM HIGH	CFM LOW	TYPE	WEIGHT (POUND)
MB-C-30	30"	3.6	6300	5500	SWIVEL	60
MB-RS-C-36	36"	3.6	8200	7000	STATIONARY	70

model MB-C-30



model  
MB-RS-C-36

## Commercial Floor Fans 115V 1-PHASE STANDARD

Three speed, 115V, 1 phase, permanently lubricated motor, with rotary switch and 7 foot long SJT type 3 conductor cord. Meets OSHA standards and is UL listed. These floor fans do not have a totally enclosed motor. They should be used in a clean and dry commercial application.

MODEL NUMBER	BLADE DIAMETER	MOTOR HP	CFM HIGH	CFM MED	CFM LOW	WEIGHT (POUND)
FF-C-12	12"	1/12	2100	1750	1500	10
FF-C-20	20"	1/5	3450	3100	2950	18

model FF-C-20



## Industrial Ceiling Fans 115V 1-PHASE STANDARD

Lower winter heating costs by recovering residual heat trapped at roof level. Fully assembled except blade bolt down, 3 conductor power cord is 3 foot long with plug. All metal construction, with white epoxy finish and aluminum paddles. Fan has 18" down rod with safety cable. Speed controls and reversion switches available, please contact factory.

MODEL NUMBER	TYPE	SIZE	VOLTAGE / PHASE	CFM	WEIGHT (POUND)
ICF-48	DOWN DRAFT	48"	115V, 1PH	17000	13
ICF-56	DOWN DRAFT	56"	115V, 1PH	21000	17
ICF-56-R	REVERSIBLE	56"	115V, 1PH	21000	16

series ICF





## Variable Speed Air Curtains

These Heavy Duty Air Curtains can be used above entry doors and industrial warehouse doors to prevent loss of cool air and maintain a clean environment. These curtains contain a heavy duty 20 gauge rigid steel cabinet, with baked on epoxy powder coat paint for durability. Motor is a heavy duty, PSC, direct drive high efficiency, and signed for use with SCR controllers. Motors are permanently lubricated for long life and have thermal over load protection. SCR speed controller supplied on all units compatible with the motor with low end adjustment for air volume control and savings in power consumption. These heavy duty units have a 3/4 HP motor, 120V power and can go up to a 12' high doorway. Heating options available, contact factory.

MODEL NUMBER	DIMENSIONS WIDTH x HEIGHT (INCHES)	CFM (LOW x HIGH)	WEIGHT (POUND)
ACURT-36	36" x 16" (1 ACURT-36)	819 / 2672	77
ACURT-48	48" x 16" (1 ACURT-48)	906 / 4611	85
ACURT-60	60" x 16" (1 ACURT-60)	1126 / 5763	93
ACURT-72	72" x 16" (2 ACURT-36's)	1638 / 5344	154
ACURT-96	96" x 16" (2 ACURT-48's)	1812 / 9222	170
ACURT-108	108" x 16" (3 ACURT-36's)	2457 / 8016	231
ACURT-120	120" x 16" (1 ACURT-48 & 2 ACURT-36's)	2544 / 9955	239



model TS-EVAP-16



model TS-EVAP-36

## Heavy-Duty Portable Evaporative Coolers 115V 1-PHASE STANDARD

These Portable Evaporative Coolers have large internal water reservoirs that allow units to operate approximately 8 hours without being connected to an external water source. Water is supplied to the internal tank from a standard 3/4" water hose or from optional water tank. Water level in internal tank is controlled by the unit's float valve. Maintenance free submersible water pump. 8" thick evaporative media pads are easily accessible for routine maintenance. Roto-molded corrosion free polyethylene housing. 20 foot long, 16 ga. 3 conductor cord with GFCI plug. Thermally protected, permanently lubricated fan motor. Variable speed on 36" unit / 2 speed on 48" unit. Weather tight fan and pump control switches. 4" heavy-duty casters; two (2) locking, two (2) non-locking. ETL listed.

MODEL NUMBER	BLADE SIZE	MOTOR HP	UNIT AMPS	CFM	EFFECTIVE SQ. FEET	INTERNAL WATER TANK	OVERALL SIZE (W x L x H)	WEIGHT (POUND)
TS-EVAP-16	16"	1/2	4.6	2500/3300/3900	900	42 gal.	38" x 23" x 59"	145
TS-EVAP-36	36"	1/2	11.2	4800/6600/9600	2500	32 gal.	62" x 32" x 67"	245
TS-EVAP-48	48"	1	12.0	11000/22000	4000	40 gal.	74" x 36" x 86"	405



## Quartz Infrared Spot Heaters 1-PHASE STANDARD

Keep cool work areas well heated with these Infrared Heaters. The quartz tube radiates a blanket of heat in a 60° symmetrical pattern. Unit includes; gold aluminum reflector and end caps, mounting chains, S hooks, and a cord set with plug. Units can be hung from the ceiling with mounting chains. For indoor use. Meets OSHA standards and is ETL C/US listed. Indoor use only.

MODEL NUMBER	WATTS	VOLTS	PHASE	BTU's	WEIGHT (POUND)
VCH-46C	1500	115	1	5120	9
VCH-57C	3000	240	1	10240	11
VCH-WG46	S.S. WIRE GUARDS (use with model VCH-46C)				2
VCH-WG57	S.S. WIRE GUARDS (use with model VCH-57C)				2



model CFFH-240



model CRFH-198



model FFH-118

## Portable Electric Heaters 1-PHASE STANDARD

Portable Electric Heaters are lightweight and have an easy grip handle for convenience. These heaters are perfect for office, or small spot heating applications. They include a 6 foot long 3 conductor cord and temperature control thermostat. Model CFFH-240 has a 20 amp plug configuration, which is great for construction sites. Model FFH-118 and CRFH-198 meet OSHA standards and are ETL C/US listed, while CFFH-240 is only UL C/US listed. Indoor use only.

MODEL NUMBER	OVERALL SIZE (W x D x H)	NUMBER OF SETTINGS	VOLTAGE/PHASE	BTU's	WEIGHT (POUND)
FFH-118	10" x 9 1/2" x 16"	2 HEAT / 1 FAN	120, 1PH	5120	10
CRFH-198	11" x 12" x 15"	3 HEAT	120, 1PH	5120	10
CFFH-240	10 5/8" x 10" x 12 3/4"	2 HEAT	240/208, 1PH	13648	15

## Portable Electric Salamanders

The Portable Electric Salamander are the perfect odorless, flameless, electric alternative to propane and kerosene space heaters. Safety yellow heater enclosures with safety screens on both air intake and output openings. The unit includes long-life finned tubular heating elements, thermostat adjustment, and a fan only operating feature. Includes access panel for direct wiring connections. Wheels and handle for easy portability over all surface types. Units are ETL C/US listed. Indoor use only.



MODEL NUMBER	DESCRIPTION	KW AMPS	VOLTS PHASE	TEMP RISE	WEIGHT (POUND)
PES-1520-3	PORTABLE HEATER	15/42	208/3	45	65
PES-1524-1	PORTABLE HEATER	15/63	240/1	45	69
PES-1524-3	PORTABLE HEATER	15/36	240/3	45	69
PES-1548-3	PORTABLE HEATER	15/18	480/3	45	65
PES-3048-3	PORTABLE HEATER	30/36	480/3	90	83
PES-1024-1*	PORTABLE HEATER	10/42	240/1	30	63

\*FACTORY PRE-WIRED WITH 10' CABLE & STRAIGHT BLADE RANGE PLUG

OPTIONAL 25 FOOT CORD WITH PLUG		
MODEL NUMBER	CABLE TYPE	USE WITH MODEL
PES-43-SO	4/3 SO, POWER CORD	PES-1524-1
PES-64-SO	6/4 SO, POWER CORD	PES-1520-3, PES-1524-3, PES-3048-3
PES-124-SO	12/4 SO, POWER CORD	PES-1548-3



model PES-1520-3

## Portable Electric Infrared Heaters 3-PHASE STANDARD

Provide instant, odor-free heat for indoor and semi-protected outdoor workstations and warehouse areas. Economical electric infrared heat warms only persons and objects, not the air volume. Durable heavy-duty flat panel emitter heating elements are designed for a variety of applications using no glass materials. All models have gold anodized aluminum reflectors, terminal box, protective wire screens, and reinforced front edge and corner construction. Heaters can be adjusted on the hand cart to operate in a horizontal or vertical position for maximizing the infrared heating pattern. Carts consist of a rugged steel design and are equipped with 6" rubber wheels and twin hand grips. Heaters are factory wired for three phase, but can be converted to single phase for most units.

MODEL NUMBER	WATTS	BTU's	VOLTS	PHASE	AMPS	WEIGHT (POUND)
VFSP-4324-3	4300	14,672	240	3	10.36	41
VFSP-4348-3	4300	14,672	480	3	5.18	41
VFSP-9524-3	9500	32,415	240	3	22.89	58
VFSP-9548-3	9500	32,415	480	3	11.44	58



model VFSP-4324-3

model VFSP-9548-3

## Portable Infrared Heaters 220V 1-PHASE STANDARD

Radiant heat can be adjusted in distance and height. Adjustable brightness for various applications. Requires 220V single phase power supply @ 15 amps. Portable with four swivel casters (two with brakes). Timer is included for auto-shut off. Indoor use only.

MODEL NUMBER	MAXIMUM POWER OUTPUT	LAMP ELEMENTS	ELEMENT OVERALL SIZE (W x D x H)	ELEMENT EACH SIZE (W x D x H)	WEIGHT (POUND)
HEAT-S	2400 W	3	27" x 6" x 30"	23½" x 4¼" x 7¾"	105
HEAT-S1	2000 W	4	39" x 6" x 18"	17¾" x 4¼" x 7¾"	115
HEAT-S2	3000 W	6	39" x 6" x 30"	17¾" x 4¼" x 7¾"	135




model HEAT-S

## Portable Quartz Infrared Spot Heater 115V 1-PHASE STANDARD

Portable heater adjusts from 2' to 6' in height. Wire guard is included, as well as a 15' cord set with plug (3 wire). Unit comes standard with four 2½" casters. Meets OSHA standards and is ETL C/US listed. Indoor use only.

MODEL NUMBER	WATTS	BTU's	VOLTS	PHASE	WEIGHT (POUND)
VCH-48-P	1500	5,120	115	1	30



model VCH-48-P



model JAN-II

## Manual Brush Sweepers

Use these sweepers anywhere, indoors or out, on concrete, asphalt, tile, and commercial carpets. Great for parking lots, gas stations, theaters, warehouses, schools, etc.

*Model JAN-II* is faster and more efficient than cleaning with conventional push brooms. The rotation of the wheels causes the brushes to rotate and pick up material. The side broom allows for cleaning along curbs, walls, and in corners. Contains no electric motor. Removable handle for storage is standard. Steel construction.

*Model JAN-SM* includes two (2) brushes on each front corner with a ¼" overlap. A retractable handle is ideal for storage.

*Model JAN-LG* is a deluxe brush sweeper. The two (2) 11" diameter brushes, one on each front corner, come with independent ½" height adjustment. The bottom center brushes also features ½" height adjustment. Those brushes measure 17½" x 5½". A folding handle for easy storage is standard.



model JAN-LG

model JAN-SM

MODEL NUMBER	OVERALL SIZE (W x D x H)	SWEEPING AREA	CAPACITY (GALLONS)	POWERED	WEIGHT (POUND)
JAN-II	27" x 32½" x 13"	27"	10	BELT DRIVEN	81
JAN-SM	21¼" x 24" x 43"	22"	6	GEAR DRIVEN	20
JAN-LG	32½" x 30" x 41½"	32½"	9	BELT DRIVEN	35



model TPA-10

## Floor Tape Applicators & Floor Tape

*Model TPA-10* - Designed to apply tape as you walk. Solid steel construction, comfortable hand grips, and durable rubber wheels allow for easy operation and maintenance. Features a soft rubber applicator head. Holds tape rolls with a 3" diameter core and widths between 1" minimum and 4" maximum.

*Model TPA-20* - Applicator head adjusts quickly to apply tape in circular path or in a long straight line. Rear stabilizer adjusts right and left to allow for marking next to walls and pallet racks. Holds tape rolls with a 3" core and width between 1" minimum to 4½" maximum.



model TPA-20

FLOOR TAPE APPLICATOR			
MODEL NUMBER	MAXIMUM ROLL DIAMETER	TAPE WIDTHS	WEIGHT (POUND)
TPA-10	6½"	1" - 4"	15
TPA-20	7"	1" - 4½"	21
YELLOW/BLACK STRIPED FLOOR TAPE			
MODEL NUMBER	WIDTH	LENGTH	WEIGHT (POUND)
YB-282-R	2"	82 FT.	1
YB-382-R	3"	82 FT.	1



model LINE-SA

model LINE-SA-W

## Line Markers

*Model LINE-SA* - Lightweight applicator for marking paint lines on ground, trenches, construction and landscaping. Approximate stripe width is 1¼". Pull trigger to spray. Holds one standard inverted marking aerosol can of spray paint. Overall height is 37½". Steel construction with painted finish.

*Model LINE-SA-W* - Economical applicator - simply pull trigger to mark paint lines on floors. Holds one standard aerosol can of inverted marking spray paint. Wheels assist with creating an even line approximately 1¼" wide. Steel construction with painted finish.

MODEL NUMBER	DESCRIPTION	WEIGHT (POUND)
LINE-SA	HANDHELD WAND APPLICATOR	4
LINE-SA-W	PORTABLE APPLICATOR W/WHEELS	6

## Magnetic Push Sweepers

Magnetic Sweepers are ideal for manufacturing facilities and construction sites. The sweeper is ergonomically friendly with an efficient handle controlled release. The design and capacity can accommodate large and small materials. While the standard handle allows for comfortable upright position during use, the wheels allow smooth rolling for quick and easy collection of objects.

Model TAM-30 is constructed of aluminum frame for lightweight strength. Other features include a telescoping handle for easy storage and length preference, a manual release for safe disposal, and a rotatable base for maneuverability.

See the Fork Truck Attachments section for our *Hanging Magnetic Sweepers*, page E5.


MODEL NUMBER	REMOVAL PROCESS	SWEEP WIDTH	WEIGHT (POUND)
MFSR-18	HANDLE RELEASE LEVER	18"	14
MFSR-24	HANDLE RELEASE LEVER	24"	16
MFSR-30	HANDLE RELEASE LEVER	30"	21
MFSR-36	HANDLE RELEASE LEVER	36"	23
MPSR-24	HANDLE RELEASE LEVER	24"	14
MPSR-24-B	HANDLE RELEASE LEVER	24"	40
MPSR-36-B	HANDLE RELEASE LEVER	36"	51
TAM-30	MANUAL RELEASE	3"	4



## Industrial Acrylic Convex Mirrors

These Acrylic Convex Mirrors eliminate those blind spots and danger areas found in most industrial settings. Lightweight design made from the finest quality materials, using Grade A Optical Acrylic. Comes standard with hanging or mounting hardware.

MODEL NUMBER	DESCRIPTION	OVERALL DIAMETER	DISTANCE COVERED	WEIGHT (POUND)
<b>ROUND CONVEX MIRRORS</b>				
CNVX-12	INDOOR USE	12"	12'	4
CNVX-18	INDOOR USE	18"	20'	5
CNVX-26	INDOOR USE	26"	26'	10
CNVX-30	INDOOR USE	30"	30'	12
CNVX-18-O	OUTDOOR USE	18"	20'	10
CNVX-26-O	OUTDOOR USE	26"	26'	16
CNVX-30-O	OUTDOOR USE	30"	30'	20
CNVX-36-O	OUTDOOR USE	36"	36'	28
CNVX-2618	RECTANGULAR	26"W x 18"H	26'	11
<b>DOMES ACRYLIC MIRRORS</b>				
DOME-18	360° FULL DOME	18"	18'	5
DOME-26	360° FULL DOME	28"	26'	9
DOME-32	360° FULL DOME	34"	32'	15
DOME-36	360° FULL DOME	36"	36'	18
DOME-H18	180° HALF DOME	18"	18'	3
DOME-H26	180° HALF DOME	28"	26'	5
DOME-H32	180° HALF DOME	34"	32'	10
<b>OBLONG HALLWAY MIRROR</b>				
OFF-EYE	OBLONG	16"W x 7¾"H	10' to 12'	3
<b>WIDE VIEW CONVEX MIRRORS</b>				
CNVX-W-16	INDOOR 4" DEEP	16"	16' to 20'	6
CNVX-W-24	INDOOR 5" DEEP	24"	25' to 30'	12
CNVX-W-32	INDOOR 7" DEEP	32"	35' to 40'	21
CNVX-WO-16	OUTDOOR 4" DEEP	16"	16' to 20'	8
CNVX-WO-24	OUTDOOR 5" DEEP	24"	25' to 30'	16
CNVX-WO-32	OUTDOOR 7" DEEP	32"	35' to 40'	24
<b>INSPECTION MIRROR</b>				
SIM-12-WF	WHEEL & LIGHT	12"	12'	12
SIM-8	INSPECTION MIRROR	8"	8'	7

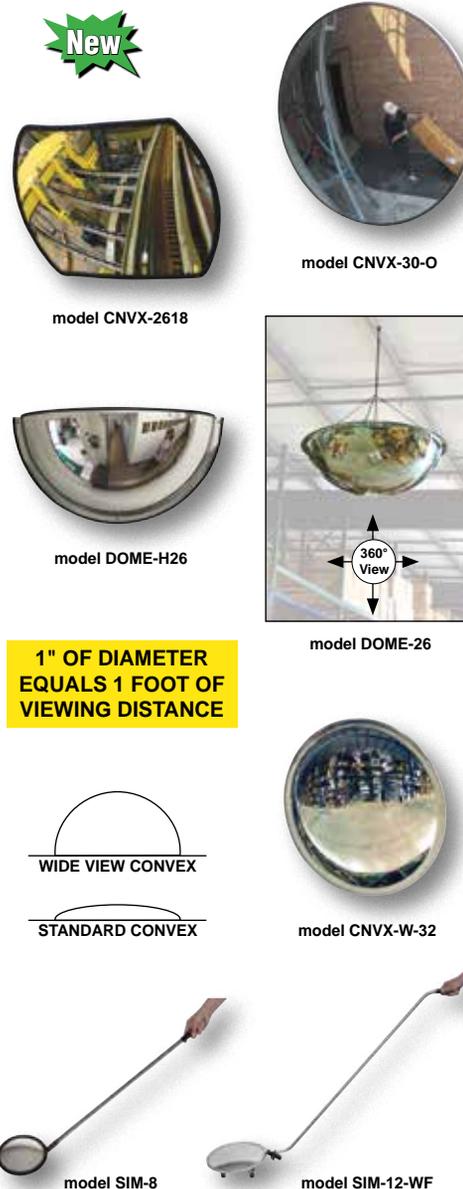



**FLAG SOLD SEPARATELY**  
Width of flag should not exceed 25% of the flag pole height

48 Hours  
to Ship

48 Hours  
to Ship

## Stainless Steel Flag Poles and American Flags

Flagpole features a bright-polished stainless steel finish to elegantly display your flag of choice. The one-piece stainless steel tapered construction will maintain its attractive finish for many years to come. Includes nylon rope, stainless steel rope cleat, and top pulley. Base plate is pre-drilled with four mounting holes. Flag poles are rated for 60 mph wind. United States flags are available in a durable nylon fabric.

MODEL NUMBER	TOP DIAMETER	MIDDLE DIAMETER	BOTTOM DIAMETER	HEIGHT	RECOMMENDED FLAG SIZE (W x H)	WEIGHT (POUND)
FLP-20-SS	3"	--	3½"	20'	5' x 3'	123
FLP-25-SS	3"	3½"	4"	25'	6' x 4'	150


  

MODEL NUMBER	WIDTH (FEET)	HEIGHT (FEET)	USE WITH POLE MODEL	WEIGHT (POUND)
AFL-20	5	3	20 FT. POLE	2
AFL-25	6	4	25 FT. POLE	2
AFL-30	8	5	30 FT. POLE	2



model EXPT-R-46-BLK

**New**

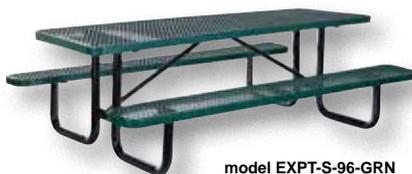

model EXPT-S-96-GRN



model EXPT-BEN-72-BRN



model HPT-6969-A-CB  
Recycled Plastic Construction

**New**

## Picnic Tables & Benches - Steel Mesh

Steel Mesh Picnic Tables are constructed of heavy-gauge steel mesh with thermoplastic coating on benches and tabletops. The smooth, high gloss surface stays cool to the touch and resists fading, mold, and vandalism. The rugged tubular steel frame is powder coated black for rust prevention. Bench and table corners are beveled for safety.

MODEL NUMBER	COLOR	SIZE	WEIGHT (POUND)
<b>ROUND PICNIC TABLES</b>			
EXPT-R-46-BRN	BROWN	46" DIAMETER	245
EXPT-R-46-GRN	GREEN	46" DIAMETER	245
EXPT-R-46-BLK	BLACK	46" DIAMETER	245
<b>RECTANGLE PICNIC TABLES</b>			
EXPT-S-72-BRN	BROWN	72" LENGTH	216
EXPT-S-72-GRN	GREEN	72" LENGTH	216
EXPT-S-72-BLK	BLACK	72" LENGTH	216
EXPT-S-96-BRN	BROWN	96" LENGTH	260
EXPT-S-96-GRN	GREEN	96" LENGTH	260
EXPT-S-96-BLK	BLACK	96" LENGTH	260
<b>BENCHES</b>			
EXPT-BEN-72-BRN	BROWN	72" LENGTH	143
EXPT-BEN-72-GRN	GREEN	72" LENGTH	143
EXPT-BEN-72-BLK	BLACK	72" LENGTH	143
EXPT-BEN-96-BRN	BROWN	96" LENGTH	160
EXPT-BEN-96-GRN	GREEN	96" LENGTH	160
EXPT-BEN-96-BLK	BLACK	96" LENGTH	160

## Picnic Tables & Benches - Recycled Plastic

Recycled Plastic Picnic Tables are constructed to provide many years of maintenance free service. Choose from multiple colors, sizes, and configurations. Molded in color resists fade and will not wear. ADA (wheelchair accessible) design also available. Suffix *CB* tables have a cedar color on the top/seats with black legs. Suffix *GB* tables have gray on the top/seats with black legs.

MODEL NUMBER	DESCRIPTION	OVERALL SIZE (W x D x H)	WEIGHT (POUND)
HPT-6969-CB	HEXAGON TABLE	69½" x 69½" x 30¼"	350
HPT-6969-GB	HEXAGON TABLE	69½" x 69½" x 30¼"	350
HPT-6969-A-CB	HEXAGON - ADA VERSION	69½" x 69½" x 30¼"	335
HPT-6969-A-GB	HEXAGON - ADA VERSION	69½" x 69½" x 30¼"	335
RWT-7260-CB	RECTANGULAR WALK-THRU	72" x 58" x 29¾"	390
RWT-7260-GB	RECTANGULAR WALK-THRU	72" x 58" x 29¾"	390
RWT-9660-CB	RECTANGULAR WALK-THRU	96" x 58" x 29¾"	575
RWT-9660-GB	RECTANGULAR WALK-THRU	96" x 58" x 29¾"	575
RPT-7228-CB	6' A-FRAME TABLE	72" x 60" x 30"	430
RPT-7228-GB	6' A-FRAME TABLE	72" x 60" x 30"	430
RPT-9628-CB	8' A-FRAME TABLE	96" x 60" x 30"	575
RPT-9628-GB	8' A-FRAME TABLE	96" x 60" x 30"	575
RPT-9628-A-CB	8' A-FRAME ADA TABLE	96" x 60" x 33½"	550
RPT-9628-A-GB	8' A-FRAME ADA TABLE	96" x 60" x 33½"	550
RPT-DB-4828-CB	4' DELUXE BENCH	48" x 28" x 33¼"	165
RPT-DB-4828-GB	4' DELUXE BENCH	48" x 28" x 33¼"	165
RPT-DB-7228-CB	6' DELUXE BENCH	72" x 28" x 33¼"	260
RPT-DB-7228-GB	6' DELUXE BENCH	72" x 28" x 33¼"	260



model RWT-7260-CB

## Park Benches - Recycled Plastic

Get the look of a traditional bench at an economic price. Made entirely of 100% post-consumer recycled plastic. Sustainability, quality, and comfort are combined in a maintenance free bench. It will never need scraping, staining, painting, or storage and stands up to the harshest weather Mother Nature can dish out. Also available is permanent installation hardware or engrave a message on the back boards (contact factory for details).



model  
BEN-PC4-BK-CD



model  
BEN-PD6-BK-GY



model  
BEN-PE6-BK-CD



model  
BEN-PL8-BK-CD



model  
BEN-PT6-BK-BK

MODEL NUMBER	COLOR	OVERALL SIZE (W x L x H)	WEIGHT (POUND)
<b>CAMBRIDGE BACKED BENCH WITH ARMS</b>			
BEN-PC4-BK-BK	BLACK/BLACK	26¾" x 48" x 30¼"	79
BEN-PC4-BK-BN	BLACK/ BROWN	26¾" x 48" x 30¼"	79
BEN-PC4-BK-CD	BLACK/ CEDAR	26¾" x 48" x 30¼"	79
BEN-PC4-BK-GY	BLACK/ GRAY	26¾" x 48" x 30¼"	79
<b>DELUXE BACKED BENCH</b>			
BEN-PD6-BK-BK	BLACK/BLACK	26⅛" x 72" x 32½"	131
BEN-PD6-BK-BN	BLACK/BROWN	26⅛" x 72" x 32½"	131
BEN-PD6-BK-CD	BLACK/CEDAR	26⅛" x 72" x 32½"	131
BEN-PD6-BK-GY	BLACK/GRAY	26⅛" x 72" x 32½"	131
<b>ECON BACKED BENCH</b>			
BEN-PE4-BK-BK	BLACK/BLACK	26¼" x 48" x 32¼"	72
BEN-PE4-BK-BN	BLACK/BROWN	26¼" x 48" x 32¼"	72
BEN-PE4-BK-CD	BLACK/CEDAR	26¼" x 48" x 32¼"	72
BEN-PE4-BK-GY	BLACK/GRAY	26¼" x 48" x 32¼"	72
BEN-PE6-BK-BK	BLACK/BLACK	26¼" x 72" x 32¼"	114
BEN-PE6-BK-BN	BLACK/BROWN	26¼" x 72" x 32¼"	114
BEN-PE6-BK-CD	BLACK/CEDAR	26¼" x 72" x 32¼"	114
BEN-PE6-BK-GY	BLACK/GRAY	26¼" x 72" x 32¼"	114
BEN-PE8-BK-BK	BLACK/BLACK	26¼" x 96" x 32¼"	152
BEN-PE8-BK-BN	BLACK/BROWN	26¼" x 96" x 32¼"	152
BEN-PE8-BK-CD	BLACK/CEDAR	26¼" x 96" x 32¼"	152
BEN-PE8-BK-GY	BLACK/GRAY	26¼" x 96" x 32¼"	152
<b>LANDMARK BACKED BENCH</b>			
BEN-PL8-BK-BK	BLACK/BLACK	26¼" x 96" x 33⅜"	188
BEN-PL8-BK-BN	BLACK/BROWN	26¼" x 96" x 33⅜"	188
BEN-PL8-BK-CD	BLACK/CEDAR	26¼" x 96" x 33⅜"	188
BEN-PL8-BK-GY	BLACK/GRAY	26¼" x 96" x 33⅜"	188
<b>MONARQUE BACKED BENCH</b>			
BEN-PM6-BK-BK	BLACK/BLACK	29" x 72" x 32⅜"	129
BEN-PM6-BK-BN	BLACK/BROWN	29" x 72" x 32⅜"	129
BEN-PM6-BK-CD	BLACK/CEDAR	29" x 72" x 32⅜"	129
BEN-PM6-BK-GY	BLACK/GRAY	29" x 72" x 32⅜"	129
<b>TRADITIONAL BACKED BENCH</b>			
BEN-PT6-BK-BK	BLACK/BLACK	26¼" x 72" x 32½"	145
BEN-PT6-BK-BN	BLACK/BROWN	26¼" x 72" x 32½"	145
BEN-PT6-BK-CD	BLACK/CEDAR	26¼" x 72" x 32½"	145
BEN-PT6-BK-GY	BLACK/GRAY	26¼" x 72" x 32½"	145
BEN-ABK	(4) "L" BRACKETS & (8) SCREWS ground anchors not included		1



model  
BEN-PM6-BK-CD



model TR-PSQ-22-BK-CD

## Trash Receptacles

The Economy 22 gallon receptacle represents both value and quality in a space-saving design. Made in America of 100% post consumer recycled plastic, it is available in (3) three slat colors with a black top. It is not only a sustainable product, it can be used for trash or recyclable items with custom engraving available on the top, contact factory.

The large capacity 33 and 49 gallon receptacles can be used for trash or as part of a recycling station. Made in America of 100% post-consumer recycled plastic, includes an inner plastic liner and are available in (3) three colors with a black top. Stainless steel fasteners ensure a rust resistant, long life and are internal to provide a clean, blemish-free appearance. Keep your environment clean and keep plastic out of the landfill at the same time.

We've added flare to utility with our Round Flare Top Receptacle! The unique design has an inner liner and 33 gallon capacity. Made in America of 100% post-consumer recycled plastic. It's eco-friendly while helping keep trash/recyclables in their place.



model TR-PR-33-GY



model TR-PRF-33



model TR-PR-49-GY

MODEL NUMBER	CAPACITY (GALLONS)	OVERALL SIZE (W x L x H)	COLOR	WEIGHT (POUND)
<b>22 GALLON ECONOMY RECEPTACLE</b>				
TR-PSQ-22-BK-BK	22	17" x 18½" x 28"	BLACK/BLACK	66
TR-PSQ-22-BK-CD	22	17" x 18½" x 28"	BLACK/CEDAR	66
TR-PSQ-22-BK-GY	22	17" x 18½" x 28"	BLACK/GRAY	66
<b>33 GALLON ROUND RECEPTACLE</b>				
TP-PR-33-BK	33	26⅜" x 30"	BLACK	94
TP-PR-33-BN	33	26⅜" x 30"	BROWN	94
TP-PR-33-CD	33	26⅜" x 30"	CEDAR	94
TP-PR-33-GN	33	26⅜" x 30"	GREEN	94
TP-PR-33-GY	33	26⅜" x 30"	GRAY	94
TP-PR-33-SD	33	26⅜" x 30"	SAND	94
TP-PR-33-WW	33	26⅜" x 30"	WEATHERED	94
<b>33 GALLON ROUND RECEPTACLE WITH RAINCAP</b>				
TP-PRC-33-BK	33	26⅜" x 37"	BLACK	114
TP-PRC-33-BN	33	26⅜" x 37"	BROWN	114
TP-PRC-33-CD	33	26⅜" x 37"	CEDAR	114
TP-PRC-33-GN	33	26⅜" x 37"	GREEN	114
TP-PRC-33-GY	33	26⅜" x 37"	GRAY	114
TP-PRC-33-SD	33	26⅜" x 37"	SAND	114
TP-PRC-33-WW	33	26⅜" x 37"	WEATHERED	114
<b>33 GALLON FLARED TOP RECEPTACLE</b>				
TP-PRF-33	33	29⅞" x 33⅞"	CEDAR	71
<b>49 GALLON ROUND RECEPTACLE</b>				
TP-PR-49-BK	49	29⅝" x 34"	BLACK	123
TP-PR-49-BN	49	29⅝" x 34"	BROWN	123
TP-PR-49-CD	49	29⅝" x 34"	CEDAR	123
TP-PR-49-GN	49	29⅝" x 34"	GREEN	123
TP-PR-49-GY	49	29⅝" x 34"	GRAY	123
TP-PR-49-SD	49	29⅝" x 34"	SAND	123
TP-PR-49-WW	49	29⅝" x 34"	WEATHERED	123
<b>49 GALLON ROUND RECEPTACLE WITH RAINCAP</b>				
TP-PRC-49-BK	49	29⅝" x 42⅞"	BLACK	133
TP-PRC-49-BN	49	29⅝" x 42⅞"	BROWN	133
TP-PRC-49-CD	49	29⅝" x 42⅞"	CEDAR	133
TP-PRC-49-GN	49	29⅝" x 42⅞"	GREEN	133
TP-PRC-49-GY	49	29⅝" x 42⅞"	GRAY	133
TP-PRC-49-SD	49	29⅝" x 42⅞"	SAND	133
TP-PRC-49-WW	49	29⅝" x 42⅞"	WEATHERED	133
<b>HARDWARE</b>				
TR-ABK	(4) "L" BRACKETS & (8) SCREWS ground anchors not included			1



48 Hours to Ship



model SCOOT-DLX

## Industrial Scooter

Get where you need to be quickly and safely with our manually powered Industrial Scooter. Sturdy foot rest includes a manually operated rear brake that safely stops the Scooter at your destination. Fixed height handle bars control front wheel maneuvering through narrow aisles and doorways. A 25" wide x 21" long front platform holds up to 110 uniform pounds, ideal for crates, boxes, and other small loads. Rolls on high performance smooth rolling 8" x 1¼" polyurethane wheels. Ships knocked down.

MODEL NUMBER	OVERALL SIZE (W x L x H)	PLATFORM SIZE (W x L)	RIDER CAPACITY	WEIGHT (POUND)
SCOOT-DLX®	27" x 61" x 40"	25" x 21"	230 lb.	72

## Industrial Bicycles

A quick, easy, and safe way to move around large facilities. Built with rider friendly features and the ability to handle various loads while moving through a facility with ease and efficiency. A three wheel design includes hand brakes for sure stopping. Adjustable height seat for different sized people. Large payload / cargo area included.

MODEL NUMBER	OVERALL SIZE (W x L x H)	UNIFORM STATIC CAPACITY	COLORS	WEIGHT (POUND)
IBIKE-3-DC-R	29" x 70" x 43"	250 lb.	RED	87
IBIKE-3-DC-B	29" x 70" x 43"	250 lb.	BLUE	87
IBIKE-3-DC-G	29" x 70" x 43"	250 lb.	GREEN	87
IBIKE-3-DC-P	29" x 70" x 43"	250 lb.	PURPLE	87
IBIKE-3-HH-Y	33½" x 79" x 45"	500 lb.	YELLOW	146
IBIKE-3-HH-BL	33½" x 79" x 45"	500 lb.	BLACK	146
IBIKE-3-DCHH-Y	29" x 70" x 43"	350 lb.	YELLOW	113
<b>OPTIONAL REAR BASKET (WORKS WITH IBIKE-3-DCHH-Y)</b>				
IBIKE-3-DCHH-RWB	21" x 9" x 15"	60	WHITE	7



## Eco-Friendly Bicycle Racks

Eco-Friendly Bike Racks provide users with a high level of security to lock up their bikes and other recreational toys. Made in America of 100% post-consumer recycled plastic, the six posts fit perfectly where space is limited. Promote a healthy lifestyle in your school, community, and public spaces by providing a secure rack to park bikes.

MODEL NUMBER	INSERT POSITIONS	OVERALL SIZE (W x L x H)	COLORS	WEIGHT (POUND)
BR-P6-BK-BK	6	42" x 48 <sup>7</sup> / <sub>16</sub> " x 31"	BLACK/BLACK	92
BR-P6-BK-CD	6	42" x 48 <sup>7</sup> / <sub>16</sub> " x 31"	BLACK/CEDAR	92
BR-P6-BK-GY	6	42" x 48 <sup>7</sup> / <sub>16</sub> " x 31"	BLACK/GRAY	92
BR-P10-BK-BK	10	42" x 72" x 31"	BLACK/BLACK	139
BR-P10-BK-CD	10	42" x 72" x 31"	BLACK/CEDAR	139
BR-P10-BK-GY	10	42" x 72" x 31"	BLACK/GRAY	139
BR-ABK	(4) "L" BRACKETS & (8) SCREWS ground anchors not included			1



## Bicycle Racks

Our Bicycle Racks make it easy to store bikes where space is at a premium. Welded steel units feature eight (8) mounting flanges with pre-drilled 7/16" holes for easy mounting with the exception of series BR-GL. Series BR-GL has two (2) mounting holes that are 3/4" diameter. Hardware is sold separately. Racks are shipped fully-assembled and ready to use. Available in a powder coat black or galvanized finish. Other powder coat finishes are available. Please contact factory.

MODEL NUMBER	BIKE CAPACITY	MOUNTING STYLE	OVERALL SIZE (W x L x H)	WEIGHT (POUND)
<b>BLACK POWDER COAT FINISH</b>				
BR-L2-BK	5	GROUND	4" x 31" x 36"	25
BR-L3-BK	7	GROUND	4" x 49" x 36"	36
BR-ST-BK	2	GROUND	20" x 38 <sup>5</sup> / <sub>16</sub> " x 26½"	31
BR-M3S-BK	3	GROUND	13 <sup>13</sup> / <sub>16</sub> " x 45 <sup>7</sup> / <sub>8</sub> " x 14 <sup>9</sup> / <sub>16</sub> "	31
BR-M3D-BK	6	GROUND	27¼" x 42" x 14 <sup>9</sup> / <sub>16</sub> "	53
BR-M3S-W-BK	3	WALL	12 <sup>7</sup> / <sub>8</sub> " x 40 <sup>3</sup> / <sub>8</sub> " x 4 <sup>1</sup> / <sub>16</sub> "	23
BR-GL-BK	4	GROUND	5 <sup>5</sup> / <sub>16</sub> " x 12¾" x 22½"	22
<b>GALVANIZED FINISH</b>				
BR-L2-GAL	5	GROUND	4" x 31" x 36"	25
BR-L3-GAL	7	GROUND	4" x 49" x 36"	36
BR-ST-GAL	2	GROUND	20" x 38 <sup>5</sup> / <sub>16</sub> " x 26½"	31
BR-M3S-GAL	3	GROUND	13 <sup>13</sup> / <sub>16</sub> " x 45 <sup>7</sup> / <sub>8</sub> " x 14 <sup>9</sup> / <sub>16</sub> "	31
BR-M3D-GAL	6	GROUND	27 <sup>3</sup> / <sub>16</sub> " x 42" x 14 <sup>9</sup> / <sub>16</sub> "	53
BR-M3S-W-GAL	3	WALL	12 <sup>7</sup> / <sub>8</sub> " x 40 <sup>3</sup> / <sub>8</sub> " x 4 <sup>1</sup> / <sub>16</sub> "	23
BR-GL-G	4	GROUND	5 <sup>5</sup> / <sub>16</sub> " x 12¾" x 22½"	22
AS-383	3/8" x 3"L CONCRETE ANCHOR (Sold Each) for 7/16" holes			1
AS-584	5/8" x 4"L CONCRETE ANCHOR (Sold Each) for 3/4" holes			1



SPECIAL POWDER COAT FINISH OPTIONS	
ERGO BLUE	SODA RED
SKY BLUE	BUBBLE GUM
SILVER LINING	CITRUS ORANGE
MACHINE GRAY	YELLOW
BATTLESHIP GRAY	HUNTER GREEN
BROWN	TRACTOR GREEN
KHAKI TAN	SNOWY WHITE
SANDY BEIGE	LIQUID ENAMEL PRIMER



model BR-M3D-BK



48 Hours  
to Ship

TYPE A



TYPE B

POWDER COATED TOUGH



model  
SHR-S-38-25



model  
SHR-P-38-50



model  
SHR-S-38-50

POWDER COATED TOUGH  
48 Hours  
to Ship



model  
REEL-16L

POWDER COATED TOUGH

48 Hours  
to Ship



model  
REEL-18



model  
ECR-45-S



model  
ECR-45-D

model  
ECR-50

## Deluxe Spring Driven Low Pressure Hose Reels

Keep air hoses off the floor and out of the way. Minimize labor, save storage space, protect against trip hazards and damaged hoses. For use with air and water only. Solid steel construction with heavy-duty brackets to resist hose pull. All reels have a full shaft and swivel to assure maximum product delivery. Maximum temperature is 150° F. Maximum pressure is 300 psi / 21 bar. Includes self retracting hose.

TYPE	MODEL NUMBER	OVERALL SIZE (W x D x H)	INSIDE HOSE DIAMETER	LENGTH OF HOSE	WEIGHT (POUND)
A	VHR-20-44	6¼" x 15" x 15"	1/4"	20 FOOT	19
A	VHR-35-44	5½" x 12½" x 13"	1/4"	35 FOOT	31
A	VHR-17-46	6" x 15" x 15½"	3/8"	17 FOOT	31
A	VHR-25-46	6½" x 14¾" x 15½"	3/8"	25 FOOT	26
A	VHR-50-56	7½" x 19½" x 20"	3/8"	50 FOOT	43
A	VHR-35-58	8" x 9¼" x 18"	1/2"	35 FOOT	43
B	VHR-50-78	8¼" x 21" x 19¾"	1/2"	50 FOOT	55

## Standard Spring Driven Low Pressure Hose Reels

Keep air hoses off the floor and out of the way. Minimize labor, save storage space, protect against trip hazards and damaged hoses. Maximum pressure is 300 psi / 20 bar. Includes self retracting hose.

*Model SHR-P-38-50* is constructed of durable, high quality impact resistant polypropylene. A positive latching mechanism automatically locks hose at a desired length. A safety lock prevents the hose from moving in either direction. An integral wall/overhead swivel bracket and 36" lead hose are included. Maximum temperature is 140° F.

*Models SHR-S-38-25 and SHR-S-38-50* are constructed of heavy-duty steel with corrosion resistant powder coat finish. Four-direction non-snap rollers reduce hose wear abrasion. Multi-position ratchet lock and easy tension adjustment is standard. Spring is fully enclosed and lubricated. Full flow swivel prevents leakage. Guide arm is adjustable for handling up to 9 positions and permits wall, ceiling, and floor mount.

MODEL NUMBER	DESCRIPTION	OVERALL SIZE (W x D x H)	INSIDE HOSE DIAMETER	LENGTH OF HOSE	WEIGHT (POUND)
SHR-P-38-50	PLASTIC	8¾" x 17½" x 17¼"	3/8"	50 FOOT	23
SHR-S-38-25	STEEL	6¼" x 15½" x 14½"	3/8"	25 FOOT	30
SHR-S-38-50	STEEL	7¾" x 21¼" x 19¾"	3/8"	50 FOOT	53

## Air Hose Reels

Help eliminate twists and tangles of hoses, save storage space, protect against trip hazards and damaged hoses with these economical Air Hose Reels.

*Arm Style, model REEL-16L*, is constructed of all steel. Quick and simple manual hand crank and spring loaded axle helps reel in up to 100 feet of 3/8" hose or 50 feet of 1/2" hose. Valve assembly is rated at 100 psi and 25 cfm. Unit can be mounted both vertically or horizontally. The wall bracket measures 7"W x 3"H. Hose is not included.

*Cylinder Style, model REEL-18*, has a holding capacity of 100 feet of 3/8" hose. Easy hand crank operation along with a smooth manual rewind. Constructed of durable steel. The wall bracket measures 13¾"W x 3¼"H. Hose is not included.

MODEL NUMBER	DESCRIPTION	OVERALL SIZE (W x D x H)	USABLE SPACE	WEIGHT (POUND)
REEL-16L	ARM STYLE	14" x 17¾" x 18"	5"	14
REEL-18	CYLINDER STYLE	19½" x 10¾" x 11½"	9"	12

## Electric Cord Reels 115V 1-PHASE STANDARD

Help eliminate the danger of tangled electrical cords with these Electric Cord Reels. The compact design is spring retractable and engineered for industrial use. Complete with 4 foot pigtail and three prong plug. 115V, 60 Hz single phase. Ideal for indoor non-weather tight applications only. UL listed and CSA certified.

*Model ECR-45-S* comes with a 15 AMP 3 wire single receptacle with clamp type strain relief.

*Model ECR-45-D* features a duplex outlet box and ground fault circuit interrupter.

Comes with a 20 AMP 3 wire double receptacle.

*Model ECR-50* has an incandescent lamp and single receptacle. Head has tool tap, push through winch and metal grounded guard. 75 watt bulb maximum. Bulb not included.

MODEL NUMBER	DESCRIPTION	CORD LENGTH	WIRE GAUGE	WEIGHT (POUND)
ECR-45-S	SINGLE RECEPTACLE	45 FEET	12	24
ECR-45-D	DOUBLE RECEPTACLE	45 FEET	12	31
ECR-50	LAMP WITH RECEPTACLE	50 FEET	16	25


## Tool Balancers

Tool Balancers are the economical choice for balancing heavy tools. The molded plastic housing has a smooth exterior with rounded edges for maximum ergonomic convenience. Hand windable spring tension adjustment knob is flush with the housing. Push-button tension release simplifies decrease in tension. Adjustment screw adds drag to spool for fine tuning of tension. Rugged steel upper swivel hook. Oversized cable opening with direct in-line pull to reduce cable wear. Adjustable cable stop and lower safety snap hook. Spring operation - no electricity needed.

MODEL NUMBER	CABLE LENGTH (FEET)	MINIMUM UNIFORM LOAD	MAXIMUM UNIFORM LOAD	WEIGHT (POUND)
TBR-1	4	1 lb.	3 lb.	2
TBR-3	6	1½ lb.	3 lb.	2
TBR-5	6	3 lb.	5 lb.	2
TBR-10	8	5 lb.	10 lb.	7
TBR-12	8	8 lb.	12 lb.	10
TBR-15	8	10 lb.	15 lb.	10
TBR-23	8	16 lb.	23 lb.	10

- Swivel Hook
- Push Button
- Safety Cable Provision
- Rotate Clockwise to Increase Tension
- Adjustable Safety Stop

48 Hours to Ship

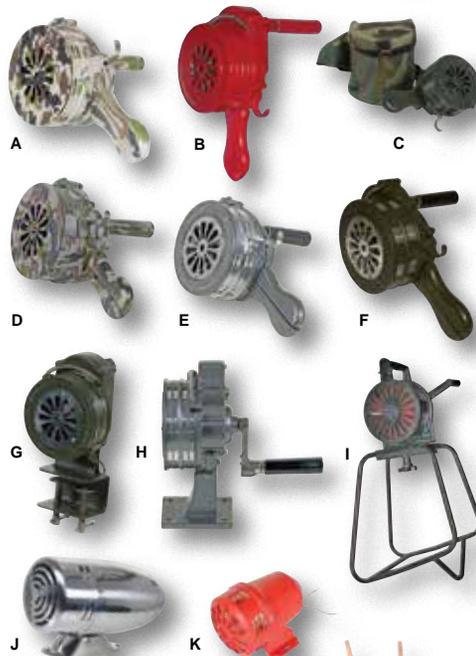

## Warning Sirens

An ideal method to warn people of dangerous situations including: severe weather warnings, emergency circumstances, terror situations, military alerts, and correctional facility alerts. Easy hand crank operation. Type A-F include a convenient carrying bag. Type G-K are easy to install through your local contractors or electricians.

48 Hours to Ship

TYPE	MODEL NUMBER	AUDIBLE DISTANCE	STONE	CONSTRUCTION	WEIGHT (POUND)
A	SIREN-100-P-C	1/4 MILE	SINGLE	PLASTIC	2
B	SIREN-100-P-R	1/4 MILE	SINGLE	PLASTIC	2
C	SIREN-100-P-GN	1/4 MILE	SINGLE	PLASTIC	2
D	SIREN-100-C	1/4 MILE	SINGLE	STEEL	4
E	SIREN-100-S	1/4 MILE	SINGLE	STEEL	4
F	SIREN-100-GN	1/4 MILE	SINGLE	STEEL	2
G	SIREN-100-BM	1/4 MILE	SINGLE	STEEL	4
H	SIREN-100-TP	1/4 MILE	SINGLE	STEEL	4
I	SIREN-120	1/2 MILE	SINGLE	STEEL	22
J	SIREN-SV	1/4 MILE	SINGLE	STEEL	6
K	SIREN-SV-AR	1/4 MILE	SINGLE	STEEL/RED	7

## Specialty Wheelbarrows

Ideal for use in both commercial or agricultural settings. Exceptional for use in "green" construction zones and/or maintenance zones. Will not puncture or sink into surfaces that otherwise might be susceptible by metal leg-brace supports. Weight is distributed via 4 wheels, which create a balanced movement of load.

Optional Ergonomic Handles, model WLB-HDL, reduces wrist torque while you manage heavy loads. The patented pivot-point allows the user to carry and lift loads with greater control reducing strain on the wrists, elbows, and lower back. Durable nylon construction.

MODEL NUMBER	CUBIC FEET	WHEEL TYPE	OVERALL SIZE (W x D x H)	WEIGHT (POUND)
WLB4-300	6	PNEUMATIC	59" x 26" x 29½"	85
WLB4-400	8	PNEUMATIC	60" x 32" x 31½"	90
WLB4-500	10	PNEUMATIC	60" x 35" x 34"	94
WLB-HDL	ERGONOMIC HANDLES			12



model WLB4-300

New



model WLB4-400

## Extreme Blower Spreader

Transform your leaf blower into a spreader of granular products. Seed and fertilize landscaping, dust fruit trees, apply algae weed control to ponds, plant food plots, spread ice melt, and much more. Extreme Blower Spreader can be installed in five minutes.


Constructed from high strength polypropylene and steel. Models EBS-KIT & EBS-KIT-XL include a pouring funnel, attachment straps, and a standard spreader base.

Model EBS-KIT-XL-G includes a pouring funnel, attachment straps, a 1¼" XD spreader base, and a 1¼" hole saw.

MODEL NUMBER	HOPPER CAPACITY (QUARTS)	OVERALL SIZE (W x D x H)	WEIGHT (POUND)
EBS-KIT	1.75	4" x 10" x 5"	2
EBS-KIT-XL	4.25	7" x 10" x 10"	2
EBS-KIT-XL-G	4.25	7" x 10" x 10"	2



model EBS-KIT-XL-G



48 Hours  
to Ship

## Aluminum Smokers Bollard

Manufactured from aluminum alloy for an attractive finish. Includes internal storage container for holding cigarettes. Easy to empty design. Floor-mounted unit includes (4) pre-drilled mounting holes. Wall mounted unit includes hardware.

MODEL NUMBER	DESCRIPTION	HEIGHT	OUTSIDE DIAMETER	WEIGHT (POUND)
SMK-F-35A	FLOOR MOUNTED	35"	3¼"	13
SMK-W-19A	WALL MOUNTED	19"	3¼"	4
AS-124-4PK	ANCHOR BOLTS FOR CONCRETE (4) 1/2" x 4"			4



BEST  
SELLER

## Storage Buildings

Modular Storage Buildings are ideal for keeping valuable items secure. Constructed of maintenance free galvanized corrugated paneling. The door measures 45"W x 74"H usable and features a right-side hinged lock (padlock not included). Modular design is easy to assemble. Once assembled, unit can be moved with a fork lift. Each unit features a wooden floor 5¾" high to help keep products dry. Built-in rain gutters for water drainage is standard.

MODEL NUMBER	DEPTH	OVERALL SIZE (W x D x H)	USABLE SIZE (W x D x H)	WEIGHT (POUND)
STOR-96-G-W-1RH	SINGLE	109" x 76½" x 84½"	106" x 73½" x 78"	1010
STOR-912-G-W-1RH	DOUBLE	109" x 152½" x 84 <sup>13</sup> / <sub>16</sub> "	106" x 151" x 78"	1592



New

## Utility Steel Storage Sheds

The Utility Steel Storage Shed are used for holding all kinds of materials or tools. The hinged door provides access to the shed and the slanted roof helps with rain run-off. The shed has an open floor design (floor is not included) and a lockable door latch (padlock not included). Unit has a zinc-plated finish that prevents rust. The easy to assemble design ships knock-down with installation instructions and hardware included. Model SHED-5932-F has a front opening door design that enables the shed to be used in spacious areas, while model SHED-5932 includes a side door design for use in long narrow spaces.

MODEL NUMBER	SIDE OF BUILDING THE DOOR OPENS	OVERALL SIZE (W x D x H)	USABLE SIZE (W x H)	WEIGHT (POUND)
SHED-5932	SIDE	60" x 33¾" x 79½"	57" x 75"	128
SHED-5932-F	FRONT	60" x 33¾" x 79½"	57" x 75"	137
SHED-118	FRONT	118" x 118" x 82½"	114" x 75"	325

## Driver Cages

Driver Cages are an application that is placed around an entrance in a warehouse. This is used to keep truck drivers, and delivery personnel secluded in one place when entering the warehouse or making a delivery. Each driver cage includes a key lock on the driver side (48" side), a push bar on the warehouse side, and a 2' x 1' 8" slide up service window with shelf. Driver Cage prevents people from wandering throughout the warehouse, getting lost or hurt in the warehouse, as well as additional security. Cages consists of rectangular 2" x 1" mesh, 10 gauge woven wire, and a wet enamel gray finish. Optional colors available, contact factory.



New

MODEL NUMBER	USABLE SIZE (W x D)	OVERALL SIZE (W x D x H)	WEIGHT (POUND)
<b>2 SIDED DRIVER CAGE</b>			
WPC-D-4X4-2	48" x 48"	52" x 54" x 101¼"	521
WPC-D-4X6-2	72" x 48"	78" x 54" x 101¼"	576
WPC-D-4X8-2	96" x 48"	102" x 54" x 101¼"	598
<b>3 SIDED DRIVER CAGE</b>			
WPC-D-4X4-3	48" x 48"	52" x 54" x 101¼"	595
WPC-D-4X6-3	72" x 48"	78" x 54" x 101¼"	639
WPC-D-4X8-3	96" x 48"	102" x 54" x 101¼"	677

## Deluxe Smoking Shelters

Open front design for easy entrance/exit. Square tube anodized aluminum frame construction that never needs to be painted. Tempered safety glass side panels are frosted for semi-privacy. Roof top is manufactured from aluminum sheeting. Roof liner is manufactured from decorative aluminum extrusions. Concrete hardware anchors included for installation. Heating options available for those cold weather applications, contact factory. Ships knocked down, assembly required.



model DSSH-50

MODEL NUMBER	OVERALL SIZE (W x D x H)	INSIDE (USABLE) SIZE (W x D x H)	PERSON CAPACITY	WEIGHT (POUND)
DSSH-50 <sup>Ⓢ</sup>	105" x 50" x 103"	96" x 44" x 89"	5-6	595
DSSH-93 <sup>Ⓢ</sup>	105" x 93" x 103"	96" x 87" x 89"	10-12	1340

## Smoking Shelter / Bus Stop

Shelters feature rugged welded steel construction for strength and durability. Side panels are constructed of clear polycarbonate. The top is made from corrugated polycarbonate sheet. Mounting plates included. Heating options available for those cold weather applications, contact factory. Ships knocked down, assembly required.



model SSH-7939-80

MODEL NUMBER	USABLE SIZE (W x D x H)	OVERALL SIZE (W x D x H)	WEIGHT (POUND)
SSH-7939-80 <sup>Ⓢ</sup>	69 <sup>3</sup> / <sub>4</sub> " x 37 <sup>1</sup> / <sub>2</sub> " x 77 <sup>3</sup> / <sub>16</sub> "	76 <sup>1</sup> / <sub>4</sub> " x 49 <sup>5</sup> / <sub>16</sub> " x 83 <sup>9</sup> / <sub>16</sub> "	270
AS-125 <sup>Ⓢ</sup>	ANCHOR BOLTS FOR CONCRETE (1) 1/2" x 5/2"		1
AS-125-4PK <sup>Ⓢ</sup>	ANCHOR BOLTS FOR CONCRETE (4) 1/2" x 5/2"		4



## Multi-Duty Storage Buildings

Constructed of heavy duty steel these Multi-Duty Storage Buildings stand up in multiple weather conditions; rain, sleet, and snow. The 18 gauge steel roof is contoured for water drainage and will hold snow up to 45 lbs./sq-foot. The sides are constructed of 28 gauge steel siding. Usable size 109"W x 75"D x 80"H. Lag down plates are included for securing unit to the concrete. Ships knocked down, assembly required.



model MDS-96-SM



model MDS-96-BK  
INCLUDES STEEL BICYCLE RACK

MODEL NUMBER	DESCRIPTION	OVERALL SIZE (W x D x H)	WEIGHT (POUND)
MDS-96-DR	SHELTER WITH DOORS	120" x 95 <sup>1</sup> / <sub>2</sub> " x 90"	1080
MDS-96-SM	SMOKERS SHELTER	120" x 95 <sup>1</sup> / <sub>2</sub> " x 90"	1000
MDS-96-BK	BICYCLE STORAGE SHELTER	120" x 95 <sup>1</sup> / <sub>2</sub> " x 90"	927
AS-125 <sup>Ⓢ</sup>	ANCHOR BOLTS FOR CONCRETE (1) 1/2" x 5/2"		1
AS-125-4PK <sup>Ⓢ</sup>	ANCHOR BOLTS FOR CONCRETE (4) 1/2" x 5/2"		4



model MDS-96-DR  
72"W x 83"H &  
36"W x 83"H DOORS

## Wire Cages

Modular system offers security, storage, and safety for many applications. Stackable panel design allows for easy installation and results in a clean finish, putting this system above the rest. Using wire partitions can save in inventory costs, are more economical alternatives to modular offices and drywall, and can increase safety - all benefits to your business. Constructed of 2" x 2" mesh, 10 gauge welded wire with a powder coat gray finish.




MODEL NUMBER	DESCRIPTION	OVERALL SIZE (W x D x H)	WEIGHT (POUND)
<b>HINGED DOOR TYPE</b>			
WPC-8X8-3NC	3 SIDED, NO CEILING	102" x 100" x 101 <sup>1</sup> / <sub>4</sub> "	569
WPC-8X8-4NC	4 SIDED, NO CEILING	100" x 100" x 101 <sup>1</sup> / <sub>4</sub> "	671
WPC-8X8-4C	4 SIDED, W/ CEILING	100" x 100" x 101 <sup>1</sup> / <sub>4</sub> "	773
WPC-12X12-4NC	4 SIDED, NO CEILING	150" x 150" x 101 <sup>1</sup> / <sub>4</sub> "	854
<b>SLIDING DOOR TYPE</b>			
WPC-10X10-3NC	3 SIDED, NO CEILING	124" x 124" x 125 <sup>1</sup> / <sub>4</sub> "	759
WPC-10X10-4NC	4 SIDED, NO CEILING	124" x 124" x 125 <sup>1</sup> / <sub>4</sub> "	867
WPC-10X10-4C	4 SIDED, W/ CEILING	124" x 124" x 125 <sup>1</sup> / <sub>4</sub> "	1001



model WPC-10X10-3NC



model SHOP-DO



model SHOP-DW



model SHOP-DC



48 Hours to Ship

## Shop Desks

Ideal for supervisors, shipping and receiving, or anyone who works on their feet. Sloped top for ergonomic comfort while standing and working. Features roomy writing surface and storage area. Legs are adjustable in 1/2" increments. Cabinet unit comes with built-in lock doors and all units come with a lockable drawer. Drawer size is 24"W x 28"D x 3 1/2"H. Units ship knockdown for freight savings.

MODEL NUMBER	DESCRIPTION	OVERALL SIZE (W x D x H)	WEIGHT (POUND)
SHOP-DO	OPEN SHOP DESK	36 7/8" x 29 1/8" x 54 3/4"	120
SHOP-DC	CABINET SHOP DESK	35 1/2" x 33 3/4" x 49"	167
SHOP-DW	WALL MOUNTED DESK	24" x 22 1/2" x 11 3/4"	28



## Visibility Storage Lockers

Visibility lockers provide secure and visible storage for equipment, tools, and other valuable items. Locker sides and front door are made of 8 gauge galvanized welded wire mesh with 1 1/2" x 3" openings. Door has a padlock hasp (padlock not included). Frame is made of 14 gauge 1 1/4" x 3/8" c-channel. Roof, back, and bottom panels are made of 14 gauge sheet material. Ships fully assembled.



model VSL-1818

MODEL NUMBER	OVERALL SIZE (W x D x H)	NUMBER OF SHELVES	WEIGHT (POUND)
VSL-1818	18" x 18" x 72"	5	171
VSL-1836	36" x 18" x 80"	3	236
VSL-2436	36" x 24" x 80"	3	266
VSL-3030	30" x 30" x 80"	3	268
VSL-3636	36" x 36" x 80"	3	290



model JVSL-1818

## Storage Lockers

Whether you need this fully welded storage locker for small package pick up, for employee lockers, or evidence storage will always have an unrestricted view of the interior. Fully assembled and all welded 3 door heavy duty storage lockers. 1 1/4" x 1 1/4" x 1/8" angle frame work, 13 gauge shelves, 2" x 1" 10 gauge woven wire mesh sides. Units have 21" between shelves and doors are equipped with separate padlock lugs (Padlock sold separately). 1500 pound total capacity, 500 pounds per shelf when evenly distributed. Unit is painted dark gray. Units are non-returnable.

MODEL NUMBER	OVERALL SIZE (W x D x H)	NUMBER OF SHELVES	WEIGHT (POUND)
JVSL-1818	18" x 18" x 75"	3	121
JVSL-2424	24" x 24" x 75"	3	170
JVSL-3030	30" x 30" x 75"	3	216
JVSL-3636	36" x 36" x 75"	3	274



## Stainless Steel Lockers

Our 304 Stainless Steel Lockers are the perfect solution for areas prone to rust and sanitation concerns and are ideal for food industry, pool area, and outdoor applications. Ships knocked down, some assembly required. Other styles available, contact factory.



model LOCK-3618-SSD3



model LOCK-3618-SS63

MODEL NUMBER	NUMBER OF COLUMNS	NUMBER OF ROWS	NUMBER OF LOCKERS	OVERALL SIZE (W x D x H)	WEIGHT (POUND)
LOCK-1218-SSS1	1	1	3	12" x 18" x 78"	62
LOCK-3618-SSS3	3	2	6	36" x 18" x 78"	168
LOCK-1818-SSS1	1	1	3	18" x 18" x 78"	79
LOCK-3618-SSD3	3	2	6	36" x 18" x 78"	219
LOCK-1818-SSD1	1	2	3	18" x 18" x 78"	79
LOCK-3618-SS63	3	6	18	36" x 18" x 78"	216
LOCK-CR-12	12" COAT ROD (available in 1 & 2 rolls only)				1
LOCK-CR-18	18" COAT ROD (available in 1 & 2 rolls only)				2

## Light Bulb Recycler

The Light Bulb Recycler crushes used fluorescent lamps of any length into 100% recyclable material, while capturing over 99.99% of the vapors released. The system, which is mounted to a 55-gallon drum (not included), can hold up to 1,350 4-foot fluorescent lamps. This unit is equipped with a side-mounted dust filter unit containing the highest quality H.E.P.A. filter available. This works in conjunction with an activated carbon filter located in the steel canister. The activated carbon filter actively captures and neutralizes the mercury vapor released from the lamps during crushing. In addition to providing EPA and OSHA compliance, this unit frees up valuable storage space normally filled with boxes of used lamps and reduces handling and labor costs.

A Permit is required in NJ and MI and an application is required in TX.

These states are prohibited from bulb crushing: CA, MN, MO, ME, VT, NH, CT, RI, PA, and WV. Additionally, the nations of Canada, United Arab Emirates, Philippines, South Africa, and Brazil are prohibited too.

LBR-55-UC includes: T12 entry tube, U-Tube chute, combo kit of filters, and entry tube storage rack.

MODEL NUMBER	CRUSHES	WEIGHT (POUND)
LBR-55-UC	STRAIGHT & U-BEND BULBS	127
LBR-T8	OPTIONAL T8 BULB ADAPTOR	3
LBR-T5	OPTIONAL T5 BULB ADAPTOR	3



**New**

model LBR-55-UC  
Drum sold separately

## Heavy Duty Electric Fuel Pumps

Heavy duty industrial grade fuel pumps are designed for everyday use in agriculture, construction, automotive, and industrial applications. Rain and weather proof for outdoor applications. Lightweight, yet strong, non-corroding aluminum die cast construction. Geared design makes the pump tolerant to contaminants in fuel. cUL listed motor. Duty cycle: 30 minutes ON / 30 minutes OFF. Recommended use: Gasoline, Diesel, E15 Fuel, Kerosene, Bio Diesel (B20).

MODEL NUMBER	VOLTAGE	FLOW RATE (AT PUMP OUTLET)	INLET / OUTLET	WEIGHT (POUND)
PUMP-HDE-12	12V DC	UP TO 15 GPM	1" NPT / 3/4" NPT	30
PUMP-HDE-115	115V AC	UP TO 13 GPM	1" NPT / 3/4" NPT	30



**New**

HDE series

## Heavy Duty High Flow Electric Fuel Pump

Heavy duty industrial grade high flow fuel pump is designed for everyday use in agriculture, construction, automotive, and industrial applications. Rain and weather proof for outdoor applications. Lightweight, yet strong, non-corroding aluminum die cast construction. Geared design makes the pump tolerant to contaminants in fuel. cUL listed motor. Duty cycle: 30 minutes ON / 30 minutes OFF. Recommended use: Gasoline, Diesel, E15 Fuel, Kerosene, Bio Diesel (B20).

MODEL NUMBER	VOLTAGE	FLOW RATE (AT PUMP OUTLET)	INLET / OUTLET	WEIGHT (POUND)
PUMP-HFE-12	12V DC	UP TO 20 GPM	1" NPT / 1" NPT	35



model PUMP-HFE-12

**New**

## Electric Diesel Pumps

Portable diesel transfer pumps designed for everyday use in agriculture, construction, automotive, and industrial applications. Lightweight, yet strong, non-corroding aluminum die cast construction. Self-priming vane pump design. Base mounted and complete with lift handle. Includes hose barbs and a battery cable. Model PUMP-E-12-ST comes with suction and delivery hoses and a manual fuel control nozzle. Duty cycle: 30 minutes ON / 30 minutes OFF. Recommended use: Diesel, Kerosene.

MODEL NUMBER	VOLTAGE	FLOW RATE (AT PUMP OUTLET)	INLET / OUTLET	WEIGHT (POUND)
PUMP-E-12	12V DC	UP TO 12 GPM	3/4" NPT / 3/4" NPT	13
PUMP-E-12-ST	12V DC	UP TO 12 GPM	3/4" NPT / 3/4" NPT	17



model PUMP-E-12

**New**



model PUMP-E-12-ST

## Continuous Duty Pump

Diesel transfer pump is ideal for use on stationary tanks, fixed fuel transferring systems and dispensers, and other similar industrial applications. Lightweight, yet strong, non-corroding aluminum die cast construction. Self-priming vane pump. Continuous duty cycle with thermal overload protection. Contains a power cord with a US socket. Recommended use: Diesel, Kerosene.

MODEL NUMBER	VOLTAGE	FLOW RATE (AT PUMP OUTLET)	INLET / OUTLET	WEIGHT (POUND)
PUMP-CD-115	115V AC	UP TO 15 GPM	1" NPT / 1" NPT	17



**New**

model PUMP-CD-115



model PUMP-DEF-115

### Electric DEF Pumps

Diaphragm transfer pump designed for dispensing DEF. Lightweight non-corroding polypropylene body that is rain and weather proof. Pump has a self-priming design and an inlet & outlet fitting with 3/4 hose barbs. Duty cycle: 30 minutes ON / 30 minutes OFF.

Recommended use: DEF, Adblue, Urea, Water, Antifreeze, Detergents.

Do not use: Diesel, Kerosene, Gasoline, Oils.

MODEL NUMBER	VOLTAGE	FLOW RATE	INLET / OUTLET	WEIGHT (POUND)
PUMP-DEF-12	12V DC	UP TO 9 GPM	3/4" HOSE BARB	14
PUMP-DEF-115	115V AC	UP TO 9 GPM	3/4" HOSE BARB	16

model PUMP-EO-115



### Electric Oil Pumps

Heavy duty oil pumps designed specifically to transfer bulk oils, hydraulic oils, antifreeze, or antifreeze mixes. Pump has a non-corroding aluminum die cast body. It also includes an internal bypass valve to bypass flow if discharge pressure exceeds bypass valve setting. Built-in 2" bung adaptor for mounting directly onto drums and tanks. Can also be used to transfer used oil. Just fitting a screen onto the suction tube makes it effective for transferring used oil.

Recommended use: Oils, Synthetic Oils, Antifreeze, Used Oils, Hydraulic Fluids, Cutting Oils, Oil Based Herbicides, Non-flammable Oil Based Solvents, Liquid Soap.



model PUMP-EO-12

MODEL NUMBER	VOLTAGE	FLOW RATE	INLET / OUTLET	WEIGHT (POUND)
PUMP-EO-115	115V AC	UP TO 4.4 GPM	1" NPT / 3/4" NPT	39
PUMP-EO-115-HF*	115V AC	UP TO 8 GPM	1" NPT / 3/4" NPT	41
PUMP-EO-12	12V DC	UP TO 3.5 GPM	1" NPT / 3/4" NPT	30

\*HF = HIGH FLOW




PORTABLE SIGN POST, model FSP-24-W  
BASE & INSERT, model FSP-BASE-L  
TUBULAR FLEX INSERT, model FSP-INSERT

### Portable & Permanent Sign Bases

Sign Bases are perfect for parking garages, parking lots, retail establishments, school crossings, and high traffic pedestrian walkways. A lightweight and more durable option to steel, these signs are designed to take vehicle impacts and low speed roll-overs without causing damage to the post or vehicle. The recycled base, series FSP-BASE, is perfect for short term applications or when a rapid deployment is necessary. Permanent sign posts with circular bases can be anchored with 1/4" lag bolts (not included). Other post heights and signs are available, contact factory for pricing. For more bases and posts please see *Protective Barriers* section.

MODEL NUMBER	OVERALL HEIGHT	POST DIAMETER	COLOR	WEIGHT (POUND)
<b>PORTABLE SIGN POSTS (ONLY)</b>				
FSP-24-O	24"	2"	ORANGE	1
FSP-24-Y	24"	2"	YELLOW	1
FSP-24-W	24"	2"	WHITE	1
FSP-36-O	36"	2"	ORANGE	1
FSP-36-Y	36"	2"	YELLOW	1
FSP-36-W	36"	2"	WHITE	1
FSP-48-O	48"	2"	ORANGE	1
FSP-48-Y	48"	2"	YELLOW	1
FSP-48-W	48"	2"	WHITE	1
<b>PORTABLE SIGN POST BASES &amp; INSERT</b>				
FSP-BASE-L	LARGE BASE WITH HANDLE (30"W x 14"L x 2"H)			33
FSP-BASE-S	SMALL BASE WITH NO HANDLE (17"W x 18"L x 1"H)			11
FSP-INSERT	TUBULAR FLEX INSERT ONLY			1
<b>PERMANENT SIGN POSTS WITH CIRCULAR BASE (ANCHOR HARDWARE NOT INCLUDED)</b>				
FSP-24-O-PS	24"	2"	ORANGE	3
FSP-24-Y-PS	24"	2"	YELLOW	3
FSP-24-W-PS	24"	2"	WHITE	3
FSP-36-O-PS	36"	2"	ORANGE	3
FSP-36-Y-PS	36"	2"	YELLOW	3
FSP-36-W-PS	36"	2"	WHITE	3
FSP-48-O-PS	48"	2"	ORANGE	3
FSP-48-Y-PS	48"	2"	YELLOW	3
FSP-48-W-PS	48"	2"	WHITE	3



model FSP-BASE-L

model FSP-36-W-PS

## Sign Base Systems

Give your property that brand new look for years to come! Save time on installation and no core drilling or anchor assembly required. Pyramid base can be conveniently rolled out of the way for parking lot maintenance and snow removal. Made with ¼" low density polyethylene, which has ultra-violet and anti-static additives for long lasting, maintenance free use. Bases can be filled with concrete, sand, or up to twenty two (22) gallons of water. Steel pipe sleeved with high-density thermoplastic included with bases. Supports various signs (not included) from "NO PARKING", to "STOP SIGN", and post is removable from base for easy storage.

MODEL NUMBER	BASE DIMENSIONS (W x D x H)	WHEELS	OVERALL HEIGHT	POST DIAMETER	COLOR	WEIGHT (POUND)
PYSB-Y	22" x 22" x 22"	NO	98"	6"	YELLOW	46
PYSB-R	22" x 22" x 22"	NO	98"	6"	RED	46
PYSB-B	22" x 22" x 22"	NO	98"	6"	BLUE	46
PYSB-BK	22" x 22" x 22"	NO	98"	6"	BLACK	46
PYSB-W-Y	22" x 22" x 22"	YES	98"	6"	YELLOW	46
PYSB-W-R	22" x 22" x 22"	YES	98"	6"	RED	46
PYSB-W-B	22" x 22" x 22"	YES	98"	6"	BLUE	46
PYSB-W-BK	22" x 22" x 22"	YES	98"	6"	BLACK	46
OSB-R	20" base / 8" sides	NO	98"	6"	RED	46
OSB-B	20" base / 8" sides	NO	98"	6"	BLUE	46
OSB-GN	20" base / 8" sides	NO	98"	6"	GREEN	46



model PYSB-W-Y (SIGN NOT INCLUDED)

model OSB-B (SIGN NOT INCLUDED)

## Sign Stands

Display your signs anywhere. Surface mounted with a weighted base. Includes (3) three holes, 9/16" diameter with 1 3/8" diameter counter-bore for permanent mounting of sign. Removable post will accept virtually any sign (signs available, see Facility Maintenance section). Available with or without wheels. Wheels allow you to tip and roll unit. Steel construction with bright zinc finish.

MODEL NUMBER	DESCRIPTION	HEIGHT	BASE DIAMETER	WEIGHT (POUND)
S-STAND	NO WHEELS	48"	18"	17
S-STAND-W	WHEELS INCLUDED	48"	18"	22
AS-125	ANCHOR BOLTS (1) 1/2" x 5", (3) BOLTS NEEDED			1



model S-STAND

model S-STAND-W

## Expand-A-Gates

Designed to set up quickly and easily wherever and whenever they are needed. Ideal for preventing potential accidents. Lightweight design allows personnel to quickly retrieve the gate and limit access to unsafe areas. Smooth operating scissor action. Interlocking and nestable. Suffix -C features casters. Suffix -W features one swivel caster with a wall/rack mounting kit. Model PEXGATE is constructed of heavy-duty molded yellow and black plastic. One side of gate includes reflectors for better visibility. End pieces are hollow and may be filled with liquid for added weight. Assembly required.

MODEL NUMBER	COLLAPSED WIDTH	EXPANDED WIDTH	*OVERALL HEIGHT	WEIGHT (POUND)
<b>STEEL CONSTRUCTION</b>				
EXGATE-30	15½"	139"	38"	55
EXGATE-30-C	19½"	139"	39½"	57
EXGATE-30-W	19½"	139"	39½"	61
EXGATE-W-KIT	WALL MOUNT KIT			5
<b>ALUMINUM CONSTRUCTION</b>				
ALEXGATE-30	15½"	139"	38"	25
ALEXGATE-30-C	15½"	139"	39½"	30
ALEXGATE-30-W	15½"	139"	39½"	34
ALEXGATE-W-KIT	WALL MOUNT KIT			5
<b>PLASTIC CONSTRUCTION</b>				
PEXGATE-30	11½"	122"	38"	12
PEXGATE-30-C	11½"	122"	40¾"	13
PEXGATE-30-W	11½"	122"	40¾"	19
PEXGATE-W-KIT	WALL MOUNT KIT			5

\*OVERALL HEIGHT WHEN COLLAPSED




model EXGATE-30-W



Connector for wall mounted unit



Plastic unit is easy to fill for added weight

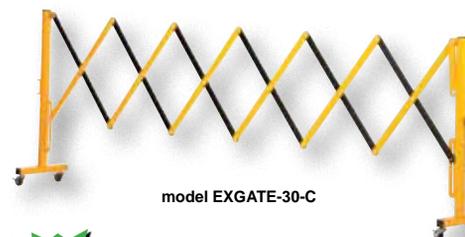

model EXGATE-30-C




STEEL CONSTRUCTION



model EXGATE-30



model PEXGATE-30

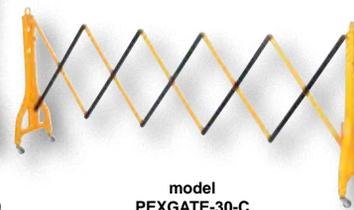

model PEXGATE-30-C

# Introducing Our **NEW** Industrial Signage Solutions

## About Our Print On Demand Signage Process

Print On Demand allows Vestil to keep fewer, less popular industrial and OSHA signs in stock, further reducing storage space and handling costs. And because your inventory levels can be kept low, Print On Demand helps reduce the chance of being left with product that has become obsolete. With our Print On Demand sign manufacturing process, we are able to react to your demand quickly. Our technology is also environmentally friendly.

### Ask Us About Our Unique Two-Sided Bilingual Signage



## We Use UV Ink Technology

With the increasing demand for quick turnaround on production runs, Vestil has adapted the use of UV ink devices that were developed specifically for the signage industry. These inks are formulated to cure quickly and offer many years of outdoor durability, as well as resistance to water and abrasion. The inks are applied directly to the substrate, thus eliminating costly additional labor traditionally associated with other sign manufacturing.




## Safety Sign Categories

- Chemicals & Haz-Mat
- Entrance & Exit
- Construction
- Fire and Emergency
- Electrical and Many More!

Many other sign materials are available!

- Plastics
- Metals
- Reflective Aluminum
- Glow-in-the-Dark

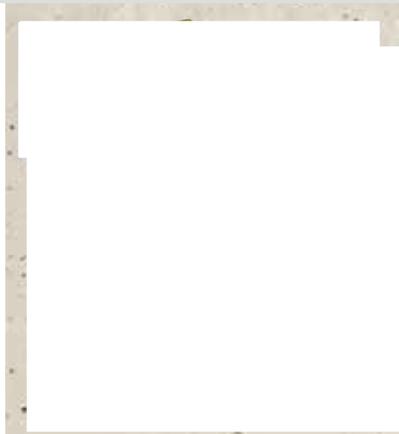

## OUR SIGNAGE IS MADE TO LAST!



## Anti-Graffiti Coating!

Anti-Graffiti is made with Tedlar®, providing an extremely durable polyvinyl fluoride (PVF) film surface for use as an anti-graffiti film. It is washable and resistant to a large number of detergents and solvents. This film provides excellent UV protection. Anti-Graffiti is recommended for both outdoor and indoor applications. UV light inhibitors aid in stopping discoloration from the Sun.

# Sign Material Choices



## Economy Value Vinyl Label Decal Sign

For general labeling or extreme conditions; Vinyl labels offer moisture, chemical, and UV resistance making them ideal for labeling both indoors and outdoors. If you're looking for a economical solution that's easy to apply to most surfaces then vinyl adhesive is your answer.



## Economy Value Polystyrene Sign

Polystyrene signs are the ideal sign choice for indoor signage. We offer polystyrene signs in .040 gauge thickness. This material is made from a form of plastic and long lasting when used indoors. If your business or school needs indoor signage or directional signage, then polystyrene is the solution.



## Standard Value .040 Aluminum Sign

Aluminum never rusts. Aluminum withstands wash-downs, harsh elements, abusive conditions, and feature good chemical, abrasion, and impact resistance. Aluminum is excellent for indoor and outdoor usage, making it ideal for a wide variety of industrial strength applications.


- Standard Thickness is .040"
- Protected by UV resistant clear *Anti-Graffiti coating!*
- Withstands harsh cleanings
- Endures outdoor environmental conditions
- Service temperature range -40° to 250°F
- Signs are round cornered and provided with holes for mounting
- Signage - Exterior long-term application life



## Premium Value .040 Aluminum (ACM) Sign

Aluminum composite material (ACM) is comprised of two pre-painted sheets of .012" aluminum with a solid polyethylene core. Provides excellent durability in outdoor applications, is lightweight, and is approximately one half the weight of our aluminum signs. Won't bow or warp. Interior or exterior long-term application life. Made In USA.

With *Anti-Graffiti coating!*

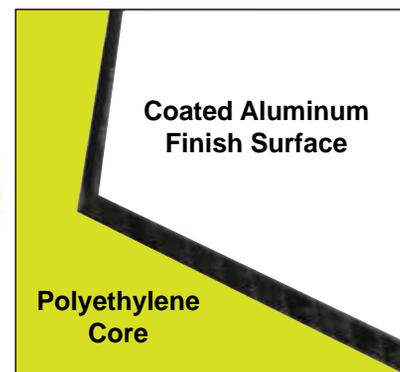

## Made to Last

Our safety signs are available in all popular sizes including oversized, colors, or shapes. Vestil assures that all signs will exceed consumer expectations. All of our signs are imaged using our state-of-the-art Print On Demand process with UV inks that won't dissolve or fade over time.

*Anti-Graffiti UV Laminate* is applied over the surface of all our aluminum constructed signs to prevent fading & increase longevity. Also available as a option on other available materials.

Our categories of signs include safety signs, security signs, first aid signs, safety banners, and many more.

You can get all of the signage you'll ever need to hang throughout your warehouse and facility including ANSI signs, OSHA signs, warning signs, danger signs, caution signs, notice signs, and more.



# NOTICE SAFETY SIGNAGE

*OUR MOST POPULAR REQUESTED Signs!*



SI-N-1

**NOTICE Model Number Format:**

**(sign #) - (size) - (material)**

*Example: SI-N-1-A-AL*

**When ordering your signage follow these steps:**

**STEP 1 - Select your sign number.**

**STEP 2 - Select your size:**

- (A) 10.5" x 7.5" (B) 12.5" x 9.5" (C) 14.5" x 10.5"
- (D) 18.5" x 12.5" (E) 20.5" x 14.5"

**STEP 3 - Select your material:**

- (AL) Aluminum Sign
- (AC) Aluminum Composite (ACM) Sign
- (PS) Polystyrene Sign
- (LB) Vinyl Label Decal Sign



SI-N-2



SI-N-3



SI-N-4



SI-N-5



SI-N-6



SI-N-7



SI-N-8



SI-N-9



SI-N-10



SI-N-11



SI-N-12



SI-N-13



SI-N-14



SI-N-15



SI-N-16



SI-N-17



SI-N-18



SI-N-19



SI-N-20



SI-N-21



SI-N-22



SI-N-23



SI-N-24



SI-N-25



SI-N-26



SI-N-27



SI-N-28



SI-N-29



SI-N-30



SI-N-31



SI-N-32



SI-N-33



SI-N-34



SI-N-35



SI-N-36



SI-N-37



SI-N-38



SI-N-039



SI-N-40



SI-N-41



SI-N-42



SI-N-43



SI-N-44



SI-N-45



SI-N-46



SI-N-47



SI-N-48



SI-N-49



SI-N-50



SI-N-51



SI-N-52



SI-N-53



SI-N-54



SI-N-55



SI-N-56



SI-N-57



SI-N-58



SI-N-59



SI-N-60



SI-N-61



SI-N-62



SI-N-63



SI-N-64



SI-N-65



SI-N-66



SI-N-67



SI-N-68



SI-N-69



SI-N-70

# DANGER SAFETY SIGNAGE

## OUR MOST POPULAR REQUESTED Signs!



SI-D-1

**DANGER** Model Number Format:  
 (sign #) - (size) - (material)

Example: SI-D-1-E-LB

When ordering your signage follow these steps:

STEP 1 - Select your sign number.

STEP 2 - Select your size:

- (A) 10.5" x 7.5" (B) 12.5" x 9.5" (C) 14.5" x 10.5"
- (D) 18.5" x 12.5" (E) 20.5" x 14.5"

STEP 3 - Select your material:

- (AL) Aluminum Sign
- (AC) Aluminum Composite (ACM) Sign
- (PS) Polystyrene Sign
- (LB) Vinyl Label Decal Sign



SI-D-2



SI-D-3



SI-D-4



SI-D-5



SI-D-6



SI-D-7



SI-D-8



SI-D-9



SI-D-10



SI-D-11



SI-D-12



SI-D-13



SI-D-14



SI-D-15



SI-D-16



SI-D-17



SI-D-18



SI-D-19



SI-D-20




SI-D-21



SI-D-22



SI-D-23



SI-D-024



SI-N-25



SI-D-26



SI-D-027



SI-D-28



SI-D-029



SI-D-30



SI-D-31



SI-D-32



SI-D-33



SI-D-34



SI-D-35



SI-D-36



SI-D-37



SI-D-38



SI-D-039



SI-D-40



SI-D-41



SI-D-42



SI-D-43



SI-D-44



SI-D-45




SI-D-46




SI-D-47



SI-D-48



SI-D-49



SI-D-50



SI-D-51



SI-D-52



SI-D-53



SI-D-54



SI-D-55



SI-D-56



SI-D-57



SI-D-58



SI-D-59



SI-D-60



SI-D-61



SI-D-62



SI-D-63




SI-D-64



SI-D-65



SI-D-66



SI-D-67



SI-D-68



SI-D-69



SI-D-70

# WARNING SAFETY SIGNAGE

## OUR MOST POPULAR REQUESTED Signs!



SI-W-1

**WARNING** Model Number Format:

**(sign #) - (size) - (material)**

*Example: SI-W-1-C-PS*

**When ordering your signage follow these steps:**

**STEP 1 - Select your sign number.**

**STEP 2 - Select your size:**

(A) 10.5" x 7.5" (B) 12.5" x 9.5" (C) 14.5" x 10.5"  
 (D) 18.5" x 12.5" (E) 20.5" x 14.5"

**STEP 3 - Select your material:**

(AL) Aluminum Sign  
 (AC) Aluminum Composite (ACM) Sign  
 (PS) Polystyrene Sign  
 (LB) Vinyl Label Decal Sign



SI-W-2



SI-W-3



SI-W-4



SI-W-5



SI-W-6



SI-W-7



SI-W-8



SI-W-9



SI-W-10



SI-W-11



SI-W-12



SI-W-13



SI-W-14



SI-W-15



SI-W-16



SI-W-17



SI-W-18



SI-W-19



SI-W-20



SI-W-21



SI-W-22



SI-W-23



SI-W-24



SI-W-25



SI-W-26



SI-W-27



SI-W-28



SI-W-29



SI-W-30



SI-W-31



SI-W-32



SI-W-33



SI-W-34



SI-W-35



SI-W-36



SI-W-37



SI-W-38



SI-W-39



SI-W-40



SI-W-41



SI-W-42



SI-W-43



SI-W-44



SI-W-45



SI-W-46



SI-W-47



SI-W-48



SI-W-49



SI-W-50



SI-W-51



SI-W-52



SI-W-53



SI-W-54



SI-W-55



SI-W-56



SI-W-57



SI-W-58



SI-W-59



SI-W-60



SI-W-61



SI-W-62



SI-W-63



SI-W-64



SI-W-65



SI-W-66



SI-W-67



SI-W-68



SI-W-69



SI-W-70

# CAUTION SAFETY SIGNAGE

## OUR MOST POPULAR REQUESTED Signs!



SI-C-1

**CAUTION** Model Number Format:

(sign #) - (size) - (material)

Example: SI-C-1-B-AC

**When ordering your signage follow these steps:**

**STEP 1 - Select your sign number.**

**STEP 2 - Select your size:**

(A) 10.5" x 7.5" (B) 12.5" x 9.5" (C) 14.5" x 10.5"  
 (D) 18.5" x 12.5" (E) 20.5" x 14.5"

**STEP 3 - Select your material:**

(AL) Aluminum Sign  
 (AC) Aluminum Composite (ACM) Sign  
 (PS) Polystyrene Sign  
 (LB) Vinyl Label Decal Sign



SI-C-2



SI-C-3



SI-C-4



SI-C-5



SI-C-6



SI-C-7



SI-C-8



SI-C-9



SI-C-10



SI-C-11



SI-C-12



SI-C-13



SI-C-14



SI-C-15



SI-C-16



SI-C-17



SI-C-18



SI-C-19



SI-C-20



SI-C-21



SI-C-22



SI-C-23



SI-C-24



SI-C-25



SI-C-26



SI-C-27



SI-C-28



SI-C-29



SI-C-30



SI-C-31



SI-C-32



SI-C-33



SI-C-34



SI-C-35



SI-C-36



SI-C-37



SI-C-38



SI-C-39



SI-C-40



SI-C-41



SI-C-42



SI-C-43



SI-C-44



SI-C-45



SI-C-46



SI-C-47



SI-C-48



SI-C-49



SI-C-50



SI-C-51



SI-C-52



SI-C-53



SI-C-54



SI-C-55



SI-C-56



SI-C-57



SI-C-58



SI-C-059



SI-C-60



SI-C-61



SI-C-62



SI-C-63



SI-C-64



SI-C-65



SI-C-66



SI-C-67



SI-C-68



SI-C-69



SI-C-70

# CAUTION SAFETY SIGNAGE

## *MOST POPULAR REQUESTED Signs!*



SI-C-71



SI-C-72



SI-C-73



SI-C-74



SI-C-75



SI-C-76



SI-C-77



SI-C-78



SI-C-79



SI-C-80

## SAFETY SIGNAGE *How to Order - It's Simple!*

### Available Materials



**.040 Coated Aluminum** - It's a flat, rigid metal substrate that is lightweight with a baked enamel finish made to withstand the elements for long-term outdoor and indoor use. Our custom aluminum signs are also available in many standard sizes and colors. Our custom aluminum signs are generally used for commercial, industrial, informational, and directional signage. It can be used with many different frame systems and will not rust.

**.040 Polystyrene** - Is one of the most widely used plastics. It is a rigid sheet of plastic. It is durable, low moisture resistance, and has good impact strength. Uses: Long-term indoor or short-term outdoor uses.

**Premium Composite Aluminum (ACM)** - A lightweight aluminum composite board, which is flat and rigid making it ideal for signage, display, presentation, and point of sale applications. It is corrosion resistant and very stable to changes in temperature, making it ideal for outdoor signage. The black core is UV stable and will not warp or delaminate.

**Vinyl Pressure Sensitive label** - Our least expensive option. Can be used on any clean smooth surface, indoor or outdoor applications.

All of our OSHA basic signs come in extended sizes so you get the most from your space and purchase.



Each sign is carefully manufactured to ensure long-life.



# Industrial Signage

## *Ordering Information*

MODEL NUMBER	SIGN TYPE*	OVERALL SIZE (W x H)	WEIGHT (POUND)
<b>.040 COATED ALUMINUM WITH UV PROTECTION</b>			
SI - (C, D, W, N*) - SIGN # - AL - A	CAUTION / DANGER / WARNING / NOTICE	(A) 10.5" x 7.5"	1
SI - (C, D, W, N*) - SIGN # - AL - B	CAUTION / DANGER / WARNING / NOTICE	(B) 12.5" x 9.5"	2
SI - (C, D, W, N*) - SIGN # - AL - C	CAUTION / DANGER / WARNING / NOTICE	(C) 14.5" x 10.5"	3
SI - (C, D, W, N*) - SIGN # - AL - D	CAUTION / DANGER / WARNING / NOTICE	(D) 18.5" x 12.5"	4
SI - (C, D, W, N*) - SIGN # - AL - E	CAUTION / DANGER / WARNING / NOTICE	(E) 20.5" x 14.5"	4
<b>.040 POLYSTYRENE</b>			
SI - (C, D, W, N*) - SIGN # - PS - A	CAUTION / DANGER / WARNING / NOTICE	(A) 10.5" x 7.5"	1
SI - (C, D, W, N*) - SIGN # - PS - B	CAUTION / DANGER / WARNING / NOTICE	(B) 12.5" x 9.5"	2
SI - (C, D, W, N*) - SIGN # - PS - C	CAUTION / DANGER / WARNING / NOTICE	(C) 14.5" x 10.5"	3
SI - (C, D, W, N*) - SIGN # - PS - D	CAUTION / DANGER / WARNING / NOTICE	(D) 18.5" x 12.5"	4
SI - (C, D, W, N*) - SIGN # - PS - E	CAUTION / DANGER / WARNING / NOTICE	(E) 20.5" x 14.5"	4
<b>PREMIUM COMPOSITE ALUMINUM (ACM) WITH UV PROTECTION</b>			
SI - (C, D, W, N*) - SIGN # - CA - A	CAUTION / DANGER / WARNING / NOTICE	(A) 10.5" x 7.5"	1
SI - (C, D, W, N*) - SIGN # - CA - B	CAUTION / DANGER / WARNING / NOTICE	(B) 12.5" x 9.5"	2
SI - (C, D, W, N*) - SIGN # - CA - C	CAUTION / DANGER / WARNING / NOTICE	(C) 14.5" x 10.5"	2
SI - (C, D, W, N*) - SIGN # - CA - D	CAUTION / DANGER / WARNING / NOTICE	(D) 18.5" x 12.5"	3
SI - (C, D, W, N*) - SIGN # - CA - E	CAUTION / DANGER / WARNING / NOTICE	(E) 20.5" x 14.5"	4
<b>INDOOR/OUTDOOR VINYL LABEL (PERMANENT ADHESIVE)**</b>			
SI - (C, D, W, N*) - SIGN # - LB - A	CAUTION / DANGER / WARNING / NOTICE	(A) 10.5" x 7.5"	1
SI - (C, D, W, N*) - SIGN # - LB - B	CAUTION / DANGER / WARNING / NOTICE	(B) 12.5" x 9.5"	1
SI - (C, D, W, N*) - SIGN # - LB - C	CAUTION / DANGER / WARNING / NOTICE	(C) 14.5" x 10.5"	1
SI - (C, D, W, N*) - SIGN # - LB - D	CAUTION / DANGER / WARNING / NOTICE	(D) 18.5" x 12.5"	2
SI - (C, D, W, N*) - SIGN # - LB - E	CAUTION / DANGER / WARNING / NOTICE	(E) 20.5" x 14.5"	2

\*Specify sign type ("C" Caution, "D" Danger, "W" Warning or "N" Notice).

\*\*Vinyl label adhesive is permanent and adheres to most smooth clean surfaces, indoor or outdoor applications.

Signs are provided with four (4) .25 inch diameter punched holes located in corners for mounting (labels not included). Other configurations available.