

**FULL-LINE CATALOG**

**Hallowell®**

**LOCKERS • CABINETS • SHELVING**

**Quick → Ship**

**Manufacturing & Distribution**

**In-Stock And Made-To-Order Products**



**TABLE OF CONTENTS**

|           |  |
|-----------|--|
| <b>2</b>  | Company Spotlight  |
| <b>3</b>  | About Hallowell  |
| <b>4</b>  | Quick Ship Program & Distribution Center Locations                 |
| <b>6</b>  | Premium Wardrobe KD Stock Lockers                                  |
| <b>8</b>  | Premium Box KD Stock Lockers                                       |
| <b>10</b> | Maintenance-Free Quiet KD Lockers                                  |
| <b>12</b> | DigiTech Electronic Day Use Lockers                                |
| <b>14</b> | Ready Built Ready-To-Use Lockers                                   |
| <b>16</b> | Ready Built II Ready-To-Use Lockers                                |
| <b>18</b> | Galvanite Rust Resistant Lockers                                   |
| <b>20</b> | MedSafe Healthcare Lockers   |
| <b>21</b> | ValueMax Economy Lockers   |
| <b>22</b> | Safety-View See-Thru Door Panels                                   |
| <b>23</b> | Safety-View Plus-See Thru Doors                                    |
| <b>24</b> | Heavy-Duty Ventilated (HDV) lockers                                |
| <b>26</b> | Locker Accessories   |
| <b>28</b> | Uniform Garment Exchange lockers                                   |
| <b>30</b> | Wood/Metal Hybrid Lockers  |
| <b>32</b> | Country Club, Health SPAs, Fitness Centers Wood Lockers            |
| <b>34</b> | Recruiter Wood Sport Lockers                                       |
| <b>36</b> | DuraTech Solid Plastic Lockers                                     |
| <b>38</b> | Food Industry lockers  |
| <b>39</b> | SpaceCube-Plastic Modular Lockers                                  |
| <b>40</b> | Maxview-Heavy Equipment Storage                                    |
| <b>41</b> | All-Welded Single-Point Ventilated Lockers                         |
| <b>42</b> | TaskForceXP Emergency Response Lockers                             |
| <b>43</b> | Open Gear-Open-Front All-Welded Sport Lockers                      |
| <b>44</b> | TA50 Military Gear Storage Lockers                                 |
| <b>45</b> | SecurityMax-All-Welded High Security Lockers                       |
| <b>46</b> | Bulk Storage Lockers   |
| <b>48</b> | Portable Traffic Gates   |
| <b>49</b> | 800 Series-Heavy-Gauge KD Cabinets                                 |
| <b>50</b> | DuraTough-Industrial Grade Steel Cabinets                          |
| <b>52</b> | Hi-Tech Industrial Grade Steel Shelving                            |
| <b>62</b> | Hi-Tech H-Post Industrial Grade Shelving                           |
| <b>70</b> | DuraTech Pass-Thru Industrial Grade Steel Shelving                 |
| <b>74</b> | Rivetwell Boltless Shelving Units                                  |
| <b>76</b> | Rivetwell Unit Growth  |
| <b>77</b> | Rivetwell Single Rivet Units                                       |
| <b>78</b> | Rivetwell Double Rivet Units                                       |
| <b>79</b> | Rivetwell Record Storage Units                                     |
| <b>80</b> | Rivetwell Automotive Storage Racks and Units                       |
| <b>81</b> | Rivetwell Shelving Components                                      |
| <b>84</b> | Rivetwell Particle Board & EZ-Deck Capacity Ratings                |
| <b>85</b> | Rivetwell Loads & Capacities                                       |
| <b>86</b> | Recruiter Custom Sport Lockers                                     |
| <b>87</b> | School Cubbies   |
| <b>88</b> | Open Front Gear Lockers  |
| <b>90</b> | Ventilated All-Welded Lockers (Turn-handle & Gravity Latch)        |
| <b>91</b> | All-Welded Lockers (Solid Gravity Latch & Ventilated Single-Point) |
| <b>92</b> | All-Welded Lockers (Solid Single-Point & Ventilated Box Lockers)   |
| <b>93</b> | Equipment Storage & Premium KD Wardrobe Lockers                    |
| <b>94</b> | Premium KD Box lockers & Premium KD Specialty Lockers              |
| <b>95</b> | Standard Quiet KD & Maintenance-Free Quiet KD (MFQ) Lockers        |
| <b>96</b> | Heavy-Duty Corridor KD & Heavy-Duty Ventilated KD (HDV) Lockers    |
| <b>97</b> | Benches, Pedestals and Locks                                       |
| <b>98</b> | Locker Accessories   |
| <b>99</b> | Color Selections for Metal Production Lockers and Cubbies          |



**Since 1903, every Hallowell component has been designed and manufactured with the concept that the highest quality product is crucial for success.**

**OUR HISTORY**

Hallowell was acquired by List Industries Inc. in 1992. List Industries was founded in 1936 with the idea that customer satisfaction and product quality would be the basis for success. This philosophy has been maintained for 74 years by the three presidents of List Industries Inc.: founder Max H. List, his son Herb List and his grandson and current president, Herb List, Jr. As an innovator and industry leader in product design and development, List Industries Inc. has and will continue to uphold Hallowell's tradition of quality and exceptional customer service.

**MANUFACTURING**

Hallowell Products are fabricated in three state-of-the-art manufacturing facilities located in Central and South Florida. Our Deerfield Beach corporate headquarters is a highly efficient manufacturing plant located in one of South Florida's premier office parks. Computer controlled fabrication and roll-forming equipment and the newest powder coating paint technology assure consistent quality workmanship. In addition to our primary manufacturing facility, we also have a second plant in a prestigious industrial park in Central Florida that more than doubles our manufacturing square footage. Our third Florida location, and newest addition, produces our new line of all-wood Recruiter sport lockers and wardrobe Club Lockers.

**MADE-TO-ORDER PRODUCTS**

In addition to Hallowell's industry leading variety of in-stock lockers, shelving and cabinets we also offer an extensive line of production items. Hallowell's complete line of production lockers (shown on pages 86 through 97) can be manufactured in short lead-times and painted in one of our 24 standard designer powder coat colors (see page 99). If a high-rise shelving system is what you require, our team of design engineers and sales professionals is eager to assist you.



# WHAT MAKES HALLOWELL THE BEST CHOICE FOR LOCKERS, SHELVING AND CABINETS?

# Hallowell®

WE INVEST IN YOU OUR CUSTOMER



## THE INDUSTRY'S LARGEST INVENTORY

- Five fully-stocked national distribution centers.
- Over 2,500 different skews to choose from in stock.
- The largest stock product variety.



## SEAMLESS RECESSED LOCKER HANDLES

- All lifter latch and single-point recessed locker handles are a one-piece drawn design.
- Made with 304 stainless steel which is tougher than any other stainless steel handle available today.



## FULL-HEIGHT CONTINUOUS PIANO HINGES

- All KD and welded lockers include 16 gauge full-height continuous piano type hinge.
- Creates a more secure connection between the door and frame ensuring that Hallowell lockers out perform the competition.



## ALL KD LOCKERS AND CABINETS ARE AVAILABLE FACTORY FULLY-ASSEMBLED

- Lockers and cabinets are assembled by trained and highly skilled trade professionals.
- Lockers and cabinets arrive ready to setup and anchor, saving you time and money.



## POWDER COAT FINISH

- All Hallowell products are finished with a durable powder coat finish
- Most environmentally friendly method of paint finishing.



## INDUSTRY-LEADING CUSTOMER SERVICE

- A dedicated team of in-house trained professionals is ready to respond to inquiries related to product features, availability, specifications, order status and shipping information.
- All personnel are trained in every aspect of our Quick Ship program.

STOCK  PROGRAM

THE FASTEST SHIPPING IN THE INDUSTRY...

**INDUSTRY'S LARGEST  
QUICK-SHIP PROGRAM****All In-Stock  
Products**Ship in **5** Business Days!**ADVANTAGES OF FIVE  
DISTRIBUTION CENTERS**

- ✓ ***Reduces freight cost***
- ✓ ***Reduces transit time***
- ✓ ***Minimizes carrier handling***

**QUICK-SHIP BENEFITS**

- ✓ ***No setup charges***
- ✓ ***No minimum order quantity***
- ✓ ***Industry's best discount***

# HALLOWELL PROTECTS YOUR PURCHASE IN TRANSIT!

# Hallowell®

INDUSTRY'S BEST PACKAGING

## The fastest shipping with the most secure packaging.

In an industry where damage in transit can be difficult to prevent, Hallowell goes the extra mile to ensure your purchase is protected by providing the industry's best packaging and packaging techniques.


### KNOCK-DOWN SHIPMENTS

- All components are packaged in custom designed strapped corrugated cartons.
- Pallets are sized so that no material overhangs the pallet.
- All cartons are strapped to **NEW** pallets.



### FULLY-ASSEMBLED SHIPMENTS

- Locker tops and bottoms are protected by specially designed capping cartons.
- Outside corners are protected with heavy-duty carton material.
- Outside faces (locker backs) are protected with full height corrugated cardboard.
- Locker fronts always face the middle of a pallet.
- When two units share a pallet, the inward facing locker fronts are separated by full-height corrugated cardboard.
- Units are wrapped with heavy-gauge clear poly wrap.
- Units are double strapped in two directions to ensure stability on **NEW** pallets.
- Pallets are sized so that no part of a unit overhangs the pallet.

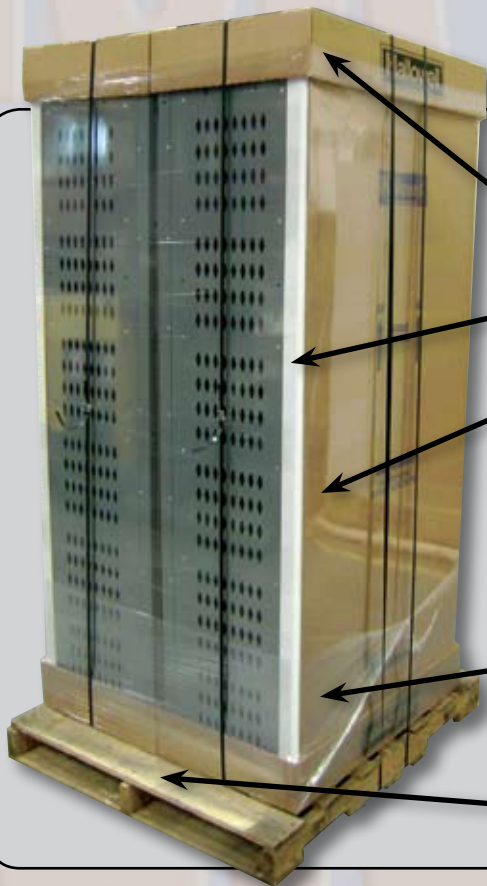

STOCK → PROGRAM

THE FASTEST SHIPPING IN THE INDUSTRY...



# PREMIUM WARDROBE KD STOCK LOCKERS

**Premium all-purpose wardrobe lockers are traditional louvered door lockers designed for storage of all personal belongings**

## FEATURES:

**BODY CONSTRUCTION:** Knock-down, 24 gauge

**BODY STYLES:** Single, double and triple tier

**DOOR:** 16 gauge louvered for added ventilation

**HINGES:** Continuous piano type

**HANDLE:** Stainless steel recessed handle with multi-point gravity lift-type latching for a modern look and added safety. Recessed handle protects finish from being marred by padlock.

**HOOKS:** One double prong ceiling hook and two single hooks per single and double tier opening. One double prong ceiling hook for triple tier.

**COAT RODS:** Available for single tier at a nominal cost

**SHELVES:** Hat shelf is included in single tier lockers.

**LEGS:** 6" high legs are standard. Lockers without legs are available for a nominal charge.

**APPEARANCE:** Parchment, Hallowell Gray and Marine Blue lockers include matching body colors. Maroon and Green Mist lockers include Parchment body and sides. Order Finished End Panels for exposed row ends if desired. Finished End Panels install over top of universal side panels adding strength and rigidity at exposed row ends and can be ordered to match locker door/frame color.

## GENERAL FEATURES:

- Lockers can be ordered fully-assembled or knock-down for assembly at destination.
- Order 3-wide units for best value. Order 1-wide units to complete quantity needed for each continuous row.
- Lockers can be ordered in combination with Premium box lockers shown on pages 8 and 9.
- All items shown are available for shipment within 5 business days of receipt of order.
- Aluminum number plates (#1-up) with mounting hardware are included. Number plate face is black with silver etched numerals. If a special numbering sequence is required, please specify when ordering. Number sequence must be consecutive numbers equal to the number of openings (doors) ordered.
- Locks are not included.

**With Piano  
Hinge**



Single Tier,  
1 wide,  
1 opening



Double Tier,  
1 wide,  
2 openings



Triple Tier,  
1 wide,  
3 openings



Single Tier,  
3 wide,  
3 openings



Double Tier,  
3 wide,  
6 openings



Deep drawn  
stainless steel  
recessed handle  
with gravity lift-type  
latching for doors  
20" high and higher

# PREMIUM WARDROBE KD STOCK LOCKERS

# Hallowell®

PREMIUM KD STOCK WARDROBE LOCKERS

| Width              | Depth | Opening Height | Frame Height | Tier | Grouping | Openings Per Group | Knock-Down Cat No. | Fully-Assembled Cat No. | Color Selection    |
|--------------------|-------|----------------|--------------|------|----------|--------------------|--------------------|-------------------------|--------------------|
| <b>SINGLE TIER</b> |       |                |              |      |          |                    |                    |                         |                    |
| 12                 | 12    | 60             | 66           | 1    | 1-wide   | 1                  | U1226-1            | U1226-1A                | PT, HG             |
| 12                 | 12    | 60             | 66           | 1    | 3-wide   | 3                  | U3226-1            | U3226-1A                | PT, HG             |
| 12                 | 15    | 60             | 66           | 1    | 1-wide   | 1                  | U1256-1            | U1256-1A                | PT, HG             |
| 12                 | 15    | 60             | 66           | 1    | 3-wide   | 3                  | U3256-1            | U3256-1A                | PT, HG             |
| 12                 | 18    | 60             | 66           | 1    | 1-wide   | 1                  | U1286-1            | U1286-1A                | PT, HG             |
| 12                 | 18    | 60             | 66           | 1    | 3-wide   | 3                  | U3286-1            | U3286-1A                | PT, HG             |
| 12                 | 12    | 72             | 78           | 1    | 1-wide   | 1                  | U1228-1            | U1228-1A                | PT, HG, MB, GM, MN |
| 12                 | 12    | 72             | 78           | 1    | 3-wide   | 3                  | U3228-1            | U3228-1A                | PT, HG, MB, GM, MN |
| 12                 | 15    | 72             | 78           | 1    | 1-wide   | 1                  | U1258-1            | U1258-1A                | PT, HG, MB, GM, MN |
| 12                 | 15    | 72             | 78           | 1    | 3-wide   | 3                  | U3258-1            | U3258-1A                | PT, HG, MB, GM, MN |
| 12                 | 18    | 72             | 78           | 1    | 1-wide   | 1                  | U1288-1            | U1288-1A                | PT, HG, MB, GM, MN |
| 12                 | 18    | 72             | 78           | 1    | 3-wide   | 3                  | U3288-1            | U3288-1A                | PT, HG, MB, GM, MN |
| 15                 | 15    | 72             | 78           | 1    | 1-wide   | 1                  | U1558-1            | U1558-1A                | PT, HG             |
| 15                 | 15    | 72             | 78           | 1    | 3-wide   | 3                  | U3558-1            | U3558-1A                | PT, HG             |
| 15                 | 18    | 72             | 78           | 1    | 1-wide   | 1                  | U1588-1            | U1588-1A                | PT, HG             |
| 15                 | 18    | 72             | 78           | 1    | 3-wide   | 3                  | U3588-1            | U3588-1A                | PT, HG             |
| 15                 | 21    | 72             | 78           | 1    | 1-wide   | 1                  | U1518-1            | U1518-1A                | PT                 |
| 15                 | 21    | 72             | 78           | 1    | 3-wide   | 3                  | U3518-1            | U3518-1A                | PT                 |
| 15                 | 24    | 72             | 78           | 1    | 1-wide   | 1                  | U1548-1            | U1548-1A                | PT                 |
| 15                 | 24    | 72             | 78           | 1    | 3-wide   | 3                  | U3548-1            | U3548-1A                | PT                 |
| 18                 | 18    | 72             | 78           | 1    | 1-wide   | 1                  | U1888-1            | U1888-1A                | PT, HG             |
| 18                 | 18    | 72             | 78           | 1    | 3-wide   | 3                  | U3888-1            | U3888-1A                | PT, HG             |
| 18                 | 21    | 72             | 78           | 1    | 1-wide   | 1                  | U1818-1            | U1818-1A                | PT, HG             |
| 18                 | 21    | 72             | 78           | 1    | 3-wide   | 3                  | U3818-1            | U3818-1A                | PT, HG             |
| 18                 | 24    | 72             | 78           | 1    | 1-wide   | 1                  | U1848-1            | U1848-1A                | PT                 |
| 18                 | 24    | 72             | 78           | 1    | 3-wide   | 3                  | U3848-1            | U3848-1A                | PT                 |
| <b>DOUBLE TIER</b> |       |                |              |      |          |                    |                    |                         |                    |
| 12                 | 12    | 30             | 66           | 2    | 1-wide   | 2                  | U1226-2            | U1226-2A                | PT, HG             |
| 12                 | 12    | 30             | 66           | 2    | 3-wide   | 6                  | U3226-2            | U3226-2A                | PT, HG             |
| 12                 | 15    | 30             | 66           | 2    | 1-wide   | 2                  | U1256-2            | U1256-2A                | PT, HG             |
| 12                 | 15    | 30             | 66           | 2    | 3-wide   | 6                  | U3256-2            | U3256-2A                | PT, HG             |
| 12                 | 18    | 30             | 66           | 2    | 1-wide   | 2                  | U1286-2            | U1286-2A                | PT, HG             |
| 12                 | 18    | 30             | 66           | 2    | 3-wide   | 6                  | U3286-2            | U3286-2A                | PT, HG             |
| 12                 | 12    | 36             | 78           | 2    | 1-wide   | 2                  | U1228-2            | U1228-2A                | PT, HG, MB, GM, MN |
| 12                 | 12    | 36             | 78           | 2    | 3-wide   | 6                  | U3228-2            | U3228-2A                | PT, HG, MB, GM, MN |
| 12                 | 15    | 36             | 78           | 2    | 1-wide   | 2                  | U1258-2            | U1258-2A                | PT, HG, MB, GM, MN |
| 12                 | 15    | 36             | 78           | 2    | 3-wide   | 6                  | U3258-2            | U3258-2A                | PT, HG, MB, GM, MN |
| 12                 | 18    | 36             | 78           | 2    | 1-wide   | 2                  | U1288-2            | U1288-2A                | PT, HG, MB, GM, MN |
| 12                 | 18    | 36             | 78           | 2    | 3-wide   | 6                  | U3288-2            | U3288-2A                | PT, HG, MB, GM, MN |
| 15                 | 15    | 36             | 78           | 2    | 1-wide   | 2                  | U1558-2            | U1558-2A                | PT, HG             |
| 15                 | 15    | 36             | 78           | 2    | 3-wide   | 6                  | U3558-2            | U3558-2A                | PT, HG             |
| 15                 | 18    | 36             | 78           | 2    | 1-wide   | 2                  | U1588-2            | U1588-2A                | PT, HG             |
| 15                 | 18    | 36             | 78           | 2    | 3-wide   | 6                  | U3588-2            | U3588-2A                | PT, HG             |
| 15                 | 21    | 36             | 78           | 2    | 1-wide   | 2                  | U1518-2            | U1518-2A                | PT                 |
| 15                 | 21    | 36             | 78           | 2    | 3-wide   | 6                  | U3518-2            | U3518-2A                | PT                 |
| 15                 | 24    | 36             | 78           | 2    | 1-wide   | 2                  | U1548-2            | U1548-2A                | PT                 |
| 15                 | 24    | 36             | 78           | 2    | 3-wide   | 6                  | U3548-2            | U3548-2A                | PT                 |
| <b>TRIPLE TIER</b> |       |                |              |      |          |                    |                    |                         |                    |
| 12                 | 12    | 24             | 78           | 3    | 1-wide   | 3                  | U1228-3            | U1228-3A                | PT, HG, MB, GM, MN |
| 12                 | 12    | 24             | 78           | 3    | 3-wide   | 9                  | U3228-3            | U3228-3A                | PT, HG, MB, GM, MN |
| 12                 | 15    | 24             | 78           | 3    | 1-wide   | 3                  | U1258-3            | U1258-3A                | PT, HG, MB, GM, MN |
| 12                 | 15    | 24             | 78           | 3    | 3-wide   | 9                  | U3258-3            | U3258-3A                | PT, HG, MB, GM, MN |
| 12                 | 18    | 24             | 78           | 3    | 1-wide   | 3                  | U1288-3            | U1288-3A                | PT, HG, MB, GM, MN |
| 12                 | 18    | 24             | 78           | 3    | 3-wide   | 9                  | U3288-3            | U3288-3A                | PT, HG, MB, GM, MN |



Triple Tier,  
3 wide,  
9 openings



Triple Tier,  
3 wide,  
9 openings



Double Tier,  
3 wide,  
6 openings



Triple Tier,  
3 wide,  
9 openings

## COLOR SELECTION

**Note:** Parchment, Hallowell Gray and Marine Blue lockers include matching body colors. Maroon and Green Mist lockers include Parchment body and sides. Some sizes and models are available in limited colors. For current color availability visit:

**729**  
PARCHMENT (PT)

**725**  
HALLOWELL GRAY (HG)

**707**  
MARINE BLUE (MB)

**705**  
GREEN MIST (GM)  
PARCHMENT BODY

**727**  
MAROON (MN)  
PARCHMENT BODY

**5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS**

**STOCK** → **PROGRAM**

**THE FASTEST SHIPPING IN THE INDUSTRY...**



# PREMIUM BOX KD STOCK LOCKERS



Five Tier,  
1 wide,  
5 openings



Five Tier,  
1 wide,  
5 openings



Six Tier,  
1 wide,  
6 openings



Six Tier,  
1 wide,  
6 openings



Six Tier,  
1 wide,  
6 openings



Six Tier,  
1 wide,  
6 openings



Six Tier,  
1 wide,  
6 openings



Six Tier,  
3 wide,  
18 openings



Single-point thru-the-door friction catch door pull designed for use with a padlock or built-in lock. Shown with optional strike plate which protects door from being marred by padlock and standard piano hinge.

**With Piano Hinge**



**4-Wide Wall Mount Lockers**



**Sixteen-Person Lockers**



# PREMIUM BOX KD STOCK LOCKERS

# Hallowell®

## Hallowell Premium box lockers include louvered doors and are perfect for storing personal items.

### FEATURES:

**BODY CONSTRUCTION:** Knock-down, 24 gauge  
**BODY STYLES:** Four, five, six tier, 16 Person and wall mount  
**DOOR:** 18 gauge, Louvered for added ventilation  
**HINGES:** Continuous piano type  
**HANDLE:** Single-point projecting friction catch door pull prepared for both padlock or built-in lock. No moving parts insures quiet maintenance-free operation.  
**HOOKS:** None  
**COAT RODS:** None, standard on the 16 person  
**SHELVES:** None  
**LEGS:** 6" high legs are standard. Lockers without legs are available for a nominal charge.  
**APPEARANCE:** Parchment, Hallowell Gray and Marine Blue lockers include matching body colors. Maroon and Green Mist lockers include Parchment body and sides. Order Finished End Panels for exposed row ends if desired. Finished End Panels install over top of universal side panels adding strength and rigidity at exposed row ends and can be ordered to match locker door/frame color.

### GENERAL FEATURES:

- Lockers can be ordered fully-assembled or knock-down for assembly at destination.
- Order 3-wide units for best value. Order 1-wide units to complete quantity needed for each continuous row.
- Lockers can be ordered in combination with Premium wardrobe lockers shown on pages 6 and 7.
- All items shown are available for shipment within 5 business days of receipt of order.
- Aluminum number plates (#1-up) with mounting hardware are included. Number plate face is black with silver etched numerals. If a special numbering sequence is required, please specify when ordering. Number sequence must be consecutive numbers equal to the number of openings (doors) ordered.
- Locks are not included.
- See page 6 for available accessories.



| Width                    | Depth | Opening Height | Frame Height | Tier              | Grouping | Openings Per Group | Knock-Down Cat No. | Fully-Assembled Cat No. | Color Selection    |
|--------------------------|-------|----------------|--------------|-------------------|----------|--------------------|--------------------|-------------------------|--------------------|
| <b>FIVE TIER</b>         |       |                |              |                   |          |                    |                    |                         |                    |
| 12                       | 12    | 12             | 66           | 5                 | 1-wide   | 5                  | U1226-5            | U1226-5A                | PT, HG             |
| 12                       | 12    | 12             | 66           | 5                 | 3-wide   | 15                 | U3226-5            | U3226-5A                | PT, HG             |
| 12                       | 15    | 12             | 66           | 5                 | 1-wide   | 5                  | U1256-5            | U1256-5A                | PT, HG             |
| 12                       | 15    | 12             | 66           | 5                 | 3-wide   | 15                 | U3256-5            | U3256-5A                | PT, HG             |
| 12                       | 18    | 12             | 66           | 5                 | 1-wide   | 5                  | U1286-5            | U1286-5A                | PT, HG             |
| 12                       | 18    | 12             | 66           | 5                 | 3-wide   | 15                 | U3286-5            | U3286-5A                | PT, HG             |
| <b>SIX TIER</b>          |       |                |              |                   |          |                    |                    |                         |                    |
| 12                       | 12    | 12             | 78           | 6                 | 1-wide   | 6                  | U1228-6            | U1228-6A                | PT, HG, MB, GM, MN |
| 12                       | 12    | 12             | 78           | 6                 | 3-wide   | 18                 | U3228-6            | U3228-6A                | PT, HG, MB, GM, MN |
| 12                       | 15    | 12             | 78           | 6                 | 1-wide   | 6                  | U1258-6            | U1258-6A                | PT, HG, MB, GM, MN |
| 12                       | 15    | 12             | 78           | 6                 | 3-wide   | 18                 | U3258-6            | U3258-6A                | PT, HG, MB, GM, MN |
| 12                       | 18    | 12             | 78           | 6                 | 1-wide   | 6                  | U1288-6            | U1288-6A                | PT, HG, MB, GM, MN |
| 12                       | 18    | 12             | 78           | 6                 | 3-wide   | 18                 | U3288-6            | U3288-6A                | PT, HG, MB, GM, MN |
| <b>4-WIDE WALL MOUNT</b> |       |                |              |                   |          |                    |                    |                         |                    |
| 48                       | 18    | 12             | 14-3/4       | 4-Wide Wall Mount |          | 4                  | U1482-4WM          | U1482-4WM-A             | PT, HG             |
| 72                       | 18    | 12             | 78           | 16-Person Unit    |          | 16                 | U1788-16           | U1788-16A               | PT, HG             |

### COLOR SELECTION

**Note:** Parchment, Hallowell Gray and Marine Blue lockers include matching body colors. Maroon and Green Mist lockers include Parchment body and sides. Some sizes and models are available in limited colors. For current color availability visit:

**729**  
PARCHMENT (PT)

**725**  
HALLOWELL GRAY (HG)

**707**  
MARINE BLUE (MB)

**705**  
GREEN MIST (GM)  
PARCHMENT BODY

**727**  
MAROON (MN)  
PARCHMENT BODY

**5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS**

STOCK → PROGRAM

THE FASTEST SHIPPING IN THE INDUSTRY...



# QUIET KD LOCKERS



Single Tier,  
1 wide,  
1 opening

Double Tier,  
1 wide,  
2 openings

Triple Tier,  
1 wide,  
3 openings



COLOR  
SELECTION

729  
PARCHEMENT (PT)

725  
HALLOWELL GRAY (HG)



**Modern flush door design with safety-minded recessed handle and reinforced door make our Maintenance-Free™ Quiet KD stock lockers the smart choice.**

## FEATURES:

**BODY CONSTRUCTION:** Knock-down, 24 gauge

**BODY STYLES:** Single, double and triple tier

**DOOR:** 16 gauge, solid with welded in door stiffener

**HINGES:** Continuous piano type

**HANDLE:** Deep drawn stainless steel recessed handle with single-point latching. Recessed handle protects finish from being marred by padlock.

**HOOKS:** One double prong ceiling hook and two single hooks per single and double tier opening. One double ceiling hook for triple tier.

**COAT RODS:** Available for single tier at a nominal cost

**SHELVES:** Hat shelf is included in single tier lockers.

**LEGS:** 6" high legs are standard. Lockers without legs are available for a nominal charge



Single Tier,  
3 wide,  
3 openings

Triple Tier,  
3 wide,  
9 openings

# OUR SILENT APPROACH TO LOCKERS

# Hallowell®

MAINTENANCE-FREE™ QUIET KD LOCKERS

| Width              | Depth | Opening Height | Frame Height | Tier | Grouping | Openings Per Group | Knock-Down Cat No. | Fully-Assembled Cat No. | Color Selection |
|--------------------|-------|----------------|--------------|------|----------|--------------------|--------------------|-------------------------|-----------------|
| <b>SINGLE TIER</b> |       |                |              |      |          |                    |                    |                         |                 |
| 12                 | 12    | 72             | 78           | 1    | 1-wide   | 1                  | UY1228-1           | UY1228-1A               | PT, HG          |
| 12                 | 12    | 72             | 78           | 1    | 3-wide   | 3                  | UY3228-1           | UY3228-1A               | PT, HG          |
| 12                 | 15    | 72             | 78           | 1    | 1-wide   | 1                  | UY1258-1           | UY1258-1A               | PT, HG          |
| 12                 | 15    | 72             | 78           | 1    | 3-wide   | 3                  | UY3258-1           | UY3258-1A               | PT, HG          |
| 12                 | 18    | 72             | 78           | 1    | 1-wide   | 1                  | UY1288-1           | UY1288-1A               | PT, HG          |
| 12                 | 18    | 72             | 78           | 1    | 3-wide   | 3                  | UY3288-1           | UY3288-1A               | PT, HG          |
| 15                 | 15    | 72             | 78           | 1    | 1-wide   | 1                  | UY1558-1           | UY1558-1A               | PT, HG          |
| 15                 | 15    | 72             | 78           | 1    | 3-wide   | 3                  | UY3558-1           | UY3558-1A               | PT, HG          |
| 15                 | 18    | 72             | 78           | 1    | 1-wide   | 1                  | UY1588-1           | UY1588-1A               | PT, HG          |
| 15                 | 18    | 72             | 78           | 1    | 3-wide   | 3                  | UY3588-1           | UY3588-1A               | PT, HG          |
| 15                 | 21    | 72             | 78           | 1    | 1-wide   | 1                  | UY1518-1           | UY1518-1A               | PT              |
| 15                 | 21    | 72             | 78           | 1    | 3-wide   | 3                  | UY3518-1           | UY3518-1A               | PT              |
| 15                 | 24    | 72             | 78           | 1    | 1-wide   | 1                  | UY1548-1           | UY1548-1A               | PT              |
| 15                 | 24    | 72             | 78           | 1    | 3-wide   | 3                  | UY3548-1           | UY3548-1A               | PT              |
| 18                 | 18    | 72             | 78           | 1    | 1-wide   | 1                  | UY1888-1           | UY1888-1A               | PT, HG          |
| 18                 | 18    | 72             | 78           | 1    | 3-wide   | 3                  | UY3888-1           | UY3888-1A               | PT, HG          |
| 18                 | 21    | 72             | 78           | 1    | 1-wide   | 1                  | UY1818-1           | UY1818-1A               | PT, HG          |
| 18                 | 21    | 72             | 78           | 1    | 3-wide   | 3                  | UY3818-1           | UY3818-1A               | PT, HG          |
| 18                 | 24    | 72             | 78           | 1    | 1-wide   | 1                  | UY1848-1           | UY1848-1A               | PT              |
| 18                 | 24    | 72             | 78           | 1    | 3-wide   | 3                  | UY3848-1           | UY3848-1A               | PT              |
| <b>DOUBLE TIER</b> |       |                |              |      |          |                    |                    |                         |                 |
| 12                 | 12    | 36             | 78           | 2    | 1-wide   | 2                  | UY1228-2           | UY1228-2A               | PT, HG          |
| 12                 | 12    | 36             | 78           | 2    | 3-wide   | 6                  | UY3228-2           | UY3228-2A               | PT, HG          |
| 12                 | 15    | 36             | 78           | 2    | 1-wide   | 2                  | UY1258-2           | UY1258-2A               | PT, HG          |
| 12                 | 15    | 36             | 78           | 2    | 3-wide   | 6                  | UY3258-2           | UY3258-2A               | PT, HG          |
| 12                 | 18    | 36             | 78           | 2    | 1-wide   | 2                  | UY1288-2           | UY1288-2A               | PT, HG          |
| 12                 | 18    | 36             | 78           | 2    | 3-wide   | 6                  | UY3288-2           | UY3288-2A               | PT, HG          |
| 15                 | 15    | 36             | 78           | 2    | 1-wide   | 2                  | UY1558-2           | UY1558-2A               | PT, HG          |
| 15                 | 15    | 36             | 78           | 2    | 3-wide   | 6                  | UY3558-2           | UY3558-2A               | PT, HG          |
| 15                 | 18    | 36             | 78           | 2    | 1-wide   | 2                  | UY1588-2           | UY1588-2A               | PT, HG          |
| 15                 | 18    | 36             | 78           | 2    | 3-wide   | 6                  | UY3588-2           | UY3588-2A               | PT, HG          |
| 15                 | 21    | 36             | 78           | 2    | 1-wide   | 2                  | UY1518-2           | UY1518-2A               | PT              |
| 15                 | 21    | 36             | 78           | 2    | 3-wide   | 6                  | UY3518-2           | UY3518-2A               | PT              |
| 15                 | 24    | 36             | 78           | 2    | 1-wide   | 2                  | UY1548-2           | UY1548-2A               | PT              |
| 15                 | 24    | 36             | 78           | 2    | 3-wide   | 6                  | UY3548-2           | UY3548-2A               | PT              |
| 18                 | 18    | 36             | 78           | 2    | 1-wide   | 2                  | UY1888-2           | UY1888-2A               | PT, HG          |
| 18                 | 18    | 36             | 78           | 2    | 3-wide   | 6                  | UY3888-2           | UY3888-2A               | PT, HG          |
| 18                 | 21    | 36             | 78           | 2    | 1-wide   | 2                  | UY1818-2           | UY1818-2A               | PT, HG          |
| 18                 | 21    | 36             | 78           | 2    | 3-wide   | 6                  | UY3818-2           | UY3818-2A               | PT, HG          |
| 18                 | 24    | 36             | 78           | 2    | 1-wide   | 2                  | UY1848-2           | UY1848-2A               | PT              |
| 18                 | 24    | 36             | 78           | 2    | 3-wide   | 6                  | UY3848-2           | UY3848-2A               | PT              |
| <b>TRIPLE TIER</b> |       |                |              |      |          |                    |                    |                         |                 |
| 12                 | 12    | 24             | 78           | 3    | 1-wide   | 3                  | UY1228-3           | UY1228-3A               | PT, HG          |
| 12                 | 12    | 24             | 78           | 3    | 3-wide   | 9                  | UY3228-3           | UY3228-3A               | PT, HG          |
| 12                 | 15    | 24             | 78           | 3    | 1-wide   | 3                  | UY1258-3           | UY1258-3A               | PT, HG          |
| 12                 | 15    | 24             | 78           | 3    | 3-wide   | 9                  | UY3258-3           | UY3258-3A               | PT, HG          |
| 12                 | 18    | 24             | 78           | 3    | 1-wide   | 3                  | UY1288-3           | UY1288-3A               | PT, HG          |
| 12                 | 18    | 24             | 78           | 3    | 3-wide   | 9                  | UY3288-3           | UY3288-3A               | PT, HG          |



Deep-drawn stainless steel recessed handle with single-point latching



**Maintenance-Free Quiet Lockers** include a 3" wide 18 gauge full height door stiffener spot welded to the inner door face and MIG welded to the hinge side as well as to the top and bottom door flanges providing a rigid torque-free door.

**COLOR SELECTION**

729  
PARCHMENT (PT)

725  
HALLOWELL GRAY (HG)

**5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS**

**11**

STOCK → PROGRAM

THE FASTEST SHIPPING IN THE INDUSTRY...



# DAY USE PROGRAMMABLE DIGITAL LOCKERS



**Locks arrive in Day-Use mode for shared use and can be programmed for permanent use by management.**

## FEATURES:

**BODY CONSTRUCTION:** Knock-down, 24 gauge

**BODY STYLES:** Single, double, triple and six tier

**DOOR:** 16 gauge, louvered type, 18 gauge for box doors

**LATCHING:** Single-point

**HINGES:** Continuous piano type

**HANDLE:** User programmable electronic lock/handle, single-point latching

**HOOKS:** One double prong ceiling hook and two single hooks per single and double tier opening. One double ceiling hook for triple tier. No hooks for 6 tier

**COAT RODS:** Available for single tier at a nominal cost

**SHELVES:** Hat shelf is included in single tier lockers.

**LEGS:** 6" high legs are standard. Lockers without legs are available for a nominal charge.



**COLOR  
SELECTION**

729  
PARCHMENT (PT)

Single Tier,  
1 wide,  
1 opening

Double Tier,  
1 wide,  
2 openings

Triple Tier,  
3 wide,  
9 openings

Six Tier,  
1 wide,  
6 openings

# PERFECT FOR BOTH SHARED AND PERMANENT USE

# Hallowell

DIGITECH™ ELECTRONIC DAY USE LOCKERS

## LOCK FEATURES


- ✓ Powered by 2 AAA batteries which provide in excess of **10,000** uses.



2 AAA batteries are included.



- ✓ LED's flash to indicate low battery level.
- ✓ Locker can be opened when batteries are low or dead by placing a standard 9-volt battery against the **RED** and **BLUE** LED's
- ✓ 8-digit master and sub-master codes for two levels of management security

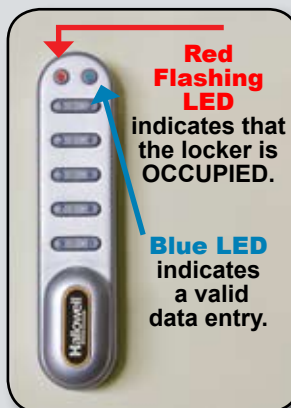

## DAY-USE MODE

User can lock and unlock any available locker door with a user selected 4-digit code. Upon returning, user enters the 4-digit code to unlock the door. Code is erased and the locker is available for the next user.

## PERMANENT MODE

User enters a pre-programmed 4-digit code to unlock and use locker repeatedly. Lock does not require a code to relock door.



| Width              | Depth | Opening Height | Frame Height | Tier | Grouping | Opening Per Group | Knock-down Cat No. | Fully-Assembled Cat No. | Color Selection |
|--------------------|-------|----------------|--------------|------|----------|-------------------|--------------------|-------------------------|-----------------|
| <b>SINGLE TIER</b> |       |                |              |      |          |                   |                    |                         |                 |
| 12                 | 12    | 72             | 78           | 1    | 1-wide   | 1                 | UEL1228-1          | UEL1228-1A              | PT              |
| 12                 | 12    | 72             | 78           | 1    | 3-wide   | 3                 | UEL3228-1          | UEL3228-1A              | PT              |
| 12                 | 15    | 72             | 78           | 1    | 1-wide   | 1                 | UEL1258-1          | UEL1258-1A              | PT              |
| 12                 | 15    | 72             | 78           | 1    | 3-wide   | 3                 | UEL3258-1          | UEL3258-1A              | PT              |
| 12                 | 18    | 72             | 78           | 1    | 1-wide   | 1                 | UEL1288-1          | UEL1288-1A              | PT              |
| 12                 | 18    | 72             | 78           | 1    | 3-wide   | 3                 | UEL3288-1          | UEL3288-1A              | PT              |
| <b>DOUBLE TIER</b> |       |                |              |      |          |                   |                    |                         |                 |
| 12                 | 12    | 36             | 78           | 2    | 1-wide   | 2                 | UEL1228-2          | UEL1228-2A              | PT              |
| 12                 | 12    | 36             | 78           | 2    | 3-wide   | 6                 | UEL3228-2          | UEL3228-2A              | PT              |
| 12                 | 15    | 36             | 78           | 2    | 1-wide   | 2                 | UEL1258-2          | UEL1258-2A              | PT              |
| 12                 | 15    | 36             | 78           | 2    | 3-wide   | 6                 | UEL3258-2          | UEL3258-2A              | PT              |
| 12                 | 18    | 36             | 78           | 2    | 1-wide   | 2                 | UEL1288-2          | UEL1288-2A              | PT              |
| 12                 | 18    | 36             | 78           | 2    | 3-wide   | 6                 | UEL3288-2          | UEL3288-2A              | PT              |
| <b>TRIPLE TIER</b> |       |                |              |      |          |                   |                    |                         |                 |
| 12                 | 12    | 24             | 78           | 3    | 1-wide   | 3                 | UEL1228-3          | UEL1228-3A              | PT              |
| 12                 | 12    | 24             | 78           | 3    | 3-wide   | 9                 | UEL3228-3          | UEL3228-3A              | PT              |
| 12                 | 15    | 24             | 78           | 3    | 1-wide   | 3                 | UEL1258-3          | UEL1258-3A              | PT              |
| 12                 | 15    | 24             | 78           | 3    | 3-wide   | 9                 | UEL3258-3          | UEL3258-3A              | PT              |
| 12                 | 18    | 24             | 78           | 3    | 1-wide   | 3                 | UEL1288-3          | UEL1288-3A              | PT              |
| 12                 | 18    | 24             | 78           | 3    | 3-wide   | 9                 | UEL3288-3          | UEL3288-3A              | PT              |
| <b>SIX TIER</b>    |       |                |              |      |          |                   |                    |                         |                 |
| 12                 | 12    | 12             | 78           | 6    | 1-wide   | 6                 | UEL1228-6          | UEL1228-6A              | PT              |
| 12                 | 12    | 12             | 78           | 6    | 3-wide   | 18                | UEL3228-6          | UEL3228-6A              | PT              |
| 12                 | 15    | 12             | 78           | 6    | 1-wide   | 6                 | UEL1258-6          | UEL1258-6A              | PT              |
| 12                 | 15    | 12             | 78           | 6    | 3-wide   | 18                | UEL3258-6          | UEL3258-6A              | PT              |
| 12                 | 18    | 12             | 78           | 6    | 1-wide   | 6                 | UEL1288-6          | UEL1288-6A              | PT              |
| 12                 | 18    | 12             | 78           | 6    | 3-wide   | 18                | UEL3288-6          | UEL3288-6A              | PT              |

5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS

STOCK → PROGRAM

THE FASTEST SHIPPING IN THE INDUSTRY...



**FULLY-ASSEMBLED  
READY-TO-USE**

# ReadyBuilt™

## READY-TO-USE!

**Ready-Built  
Lockers Include:**

- ✓ **Assembly**
- ✓ **Padlocks**
- ✓ **Padlock Strike Plates**



Locks Included  
in Stainless  
Steel Recessed  
Handles for  
Wardrobe  
Lockers



**COLOR  
SELECTION**

**729  
PARCHMENT (PT)**

**725  
HALLOWELL GRAY  
(HG)**

**707  
MARINE BLUE (MB)**



Single Tier,  
1 wide,  
1 openings



Double Tier,  
1 wide,  
2 openings



Triple Tier,  
1 wide,  
3 openings



Six Tier,  
1 wide,  
6 openings



Locks and  
Padlock Strike  
Plates Included  
for Box Lockers

**With Piano  
Hinge**

# FULLY-ASSEMBLED READY-TO-USE

# Hallowell®

READY-BUILT™ WARDROBE AND BOX LOCKERS

## General Features

- Available in single, double, triple and six tier models
- All lockers arrive ready-to-use. Lockers ship fully-assembled and include one combination padlock per door for true out-of-the box use.
- Padlock Strike Plates are included for six tier doors.
- Order 3-wide units for best value. Order 1-wide units to complete quantity needed for each continuous row.

### FEATURES:

**BODY CONSTRUCTION:** Knock-down, 24 gauge,

**BODY STYLES:** Single, double, triple and six tier

**DOOR:** 16 gauge, 18 gauge for box doors

**HINGES:** Continuous piano type

**HANDLE (wardrobe):** Stainless steel recessed handle with multi-point gravity lift-type latching. Recessed handle protects finish from being marred by padlock.

**HANDLE (box):** Box lockers include a projecting single-point friction catch door pull. No moving parts insures quiet maintenance-free operation.

**HOOKS:** One double prong ceiling hook and two single hooks per single and double tier opening. One double ceiling hook for triple tier. No hooks for box lockers.

**COAT RODS:** Available for single tier at a nominal cost

**SHELVES:** Hat shelf is included in single tier lockers.

**LEGS:** 6" high legs are standard. Lockers without legs are available for a nominal charge.



| Width              | Depth | Opening Height | Frame Height | Tier | Grouping | Openings Per Group | Fully-Assembled Cat No. | Color Selection |
|--------------------|-------|----------------|--------------|------|----------|--------------------|-------------------------|-----------------|
| <b>SINGLE TIER</b> |       |                |              |      |          |                    |                         |                 |
| 12                 | 12    | 72             | 78           | 1    | 1-wide   | 1                  | URB1228-1A              | PT, HG, MB      |
| 12                 | 12    | 72             | 78           | 1    | 3-wide   | 3                  | URB3228-1A              | PT, HG, MB      |
| 12                 | 15    | 72             | 78           | 1    | 1-wide   | 1                  | URB1258-1A              | PT, HG, MB      |
| 12                 | 15    | 72             | 78           | 1    | 3-wide   | 3                  | URB3258-1A              | PT, HG, MB      |
| 12                 | 18    | 72             | 78           | 1    | 1-wide   | 1                  | URB1288-1A              | PT, HG, MB      |
| 12                 | 18    | 72             | 78           | 1    | 3-wide   | 3                  | URB3288-1A              | PT, HG, MB      |
| <b>DOUBLE TIER</b> |       |                |              |      |          |                    |                         |                 |
| 12                 | 12    | 36             | 78           | 2    | 1-wide   | 2                  | URB1228-2A              | PT, HG, MB      |
| 12                 | 12    | 36             | 78           | 2    | 3-wide   | 6                  | URB3228-2A              | PT, HG, MB      |
| 12                 | 15    | 36             | 78           | 2    | 1-wide   | 2                  | URB1258-2A              | PT, HG, MB      |
| 12                 | 15    | 36             | 78           | 2    | 3-wide   | 6                  | URB3258-2A              | PT, HG, MB      |
| 12                 | 18    | 36             | 78           | 2    | 1-wide   | 2                  | URB1288-2A              | PT, HG, MB      |
| 12                 | 18    | 36             | 78           | 2    | 3-wide   | 6                  | URB3288-2A              | PT, HG, MB      |
| <b>TRIPLE TIER</b> |       |                |              |      |          |                    |                         |                 |
| 12                 | 12    | 24             | 78           | 3    | 1-wide   | 3                  | URB1228-3A              | PT, HG, MB      |
| 12                 | 12    | 24             | 78           | 3    | 3-wide   | 9                  | URB3228-3A              | PT, HG, MB      |
| 12                 | 15    | 24             | 78           | 3    | 1-wide   | 3                  | URB1258-3A              | PT, HG, MB      |
| 12                 | 15    | 24             | 78           | 3    | 3-wide   | 9                  | URB3258-3A              | PT, HG, MB      |
| 12                 | 18    | 24             | 78           | 3    | 1-wide   | 3                  | URB1288-3A              | PT, HG, MB      |
| 12                 | 18    | 24             | 78           | 3    | 3-wide   | 9                  | URB3288-3A              | PT, HG, MB      |
| <b>SIX TIERS</b>   |       |                |              |      |          |                    |                         |                 |
| 12                 | 12    | 12             | 78           | 6    | 1-wide   | 6                  | URB1228-6A              | PT, HG, MB      |
| 12                 | 12    | 12             | 78           | 6    | 3-wide   | 18                 | URB3228-6A              | PT, HG, MB      |
| 12                 | 15    | 12             | 78           | 6    | 1-wide   | 6                  | URB1258-6A              | PT, HG, MB      |
| 12                 | 15    | 12             | 78           | 6    | 3-wide   | 18                 | URB3258-6A              | PT, HG, MB      |
| 12                 | 18    | 12             | 78           | 6    | 1-wide   | 6                  | URB1288-6A              | PT, HG, MB      |
| 12                 | 18    | 12             | 78           | 6    | 3-wide   | 18                 | URB3288-6A              | PT, HG, MB      |



5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS

15

STOCK → PROGRAM

THE FASTEST SHIPPING IN THE INDUSTRY...



**FULLY-ASSEMBLED  
READY-TO-USE**

**Ready Built 2™**

**READY-TO-USE!**

**Ready-Built II  
Lockers Include:**

- ✓ **Assembly**
- ✓ **Padlocks**
- ✓ **Padlock Strike Plates**
- ✓ **Slope Tops**
- ✓ **6" High Metal Bases**

**With Piano  
Hinge**



**COLOR  
SELECTION**

**729  
PARCHMENT (PT)**

**725  
HALLOWELL GRAY  
(HG)**

**707  
MARINE BLUE (MB)**



Single Tier,  
1 wide,  
1 opening



Double Tier,  
1 wide,  
2 openings



Triple Tier,  
1 wide,  
3 openings



Six Tier,  
1 wide,  
6 openings

**Slope Tops**

Provide a more finished appearance and prevent items from being placed or stored on locker tops.

**Padlocks**

Are included for each door. 3-number combinations provide for maximum security. No need to go out and buy locks allowing immediate use of lockers upon arrival. Locks are master keyed.

**Strike Plates**

Aluminum plates are riveted to door to prevent padlocks from marring painted door finish on six tier lockers.

**Closed Metal Base**

Front and side bases close off area below lockers at 6" legs to prevent collection of debris.

# FULLY-ASSEMBLED READY-TO-USE

# Hallowell

READY-BUILT™ II WARDROBE AND BOX LOCKERS

## General Features

- All lockers arrive ready-to-use. Lockers ship fully-assembled and include one combination padlock per door for true out-of-the box use.
- Sloping top reduces dust accumulation and prevents item storage on locker tops.
- Closed metal bases provide a more finished appearance and eliminates the need to clean beneath lockers.
- Padlock Strike Plates are included for six tier doors.
- Order 3-wide units for best value. Order 1-wide units to complete quantity needed for each continuous row.

### FEATURES:

**BODY CONSTRUCTION:** Knock-down, 24 gauge

**BODY STYLES:** Single, double, triple and six tier

**DOOR:** 16 gauge, 18 gauge for box doors, louvered for added ventilation

**HINGES:** Continuous piano type

**HANDLE (wardrobe):** Stainless steel recessed handle with multi-point gravity lift-type latching. Recessed handle protects finish from being marred by padlock.

**HANDLE (box):** Box lockers include a projecting single-point friction catch door pull. No moving parts insures quiet maintenance-free operation.

**HOOKS:** One double prong ceiling hook and two single hooks per single and double tier opening. One double ceiling hook for triple tier. No hooks for six tier lockers

**COAT RODS:** Available for single tier at a nominal cost

**SHELVES:** Hat shelf is included in single tier lockers.

**LEGS:** 6" high legs are standard. Lockers without legs are available for a nominal charge



| Width              | Depth | Opening Height | Frame Height | Tier | Grouping | Openings Per Group | Fully-Assembled Cat No. | Color Selection |
|--------------------|-------|----------------|--------------|------|----------|--------------------|-------------------------|-----------------|
| <b>SINGLE TIER</b> |       |                |              |      |          |                    |                         |                 |
| 12                 | 12    | 72             | 78           | 1    | 1-wide   | 1                  | URB1228-1ASB            | PT, HG, MB      |
| 12                 | 12    | 72             | 78           | 1    | 3-wide   | 3                  | URB3228-1ASB            | PT, HG, MB      |
| 12                 | 15    | 72             | 78           | 1    | 1-wide   | 1                  | URB1258-1ASB            | PT, HG, MB      |
| 12                 | 15    | 72             | 78           | 1    | 3-wide   | 3                  | URB3258-1ASB            | PT, HG, MB      |
| 12                 | 18    | 72             | 78           | 1    | 1-wide   | 1                  | URB1288-1ASB            | PT, HG, MB      |
| 12                 | 18    | 72             | 78           | 1    | 3-wide   | 3                  | URB3288-1ASB            | PT, HG, MB      |
| <b>DOUBLE TIER</b> |       |                |              |      |          |                    |                         |                 |
| 12                 | 12    | 36             | 78           | 2    | 1-wide   | 2                  | URB1228-2ASB            | PT, HG, MB      |
| 12                 | 12    | 36             | 78           | 2    | 3-wide   | 6                  | URB3228-2ASB            | PT, HG, MB      |
| 12                 | 15    | 36             | 78           | 2    | 1-wide   | 2                  | URB1258-2ASB            | PT, HG, MB      |
| 12                 | 15    | 36             | 78           | 2    | 3-wide   | 6                  | URB3258-2ASB            | PT, HG, MB      |
| 12                 | 18    | 36             | 78           | 2    | 1-wide   | 2                  | URB1288-2ASB            | PT, HG, MB      |
| 12                 | 18    | 36             | 78           | 2    | 3-wide   | 6                  | URB3288-2ASB            | PT, HG, MB      |
| <b>TRIPLE TIER</b> |       |                |              |      |          |                    |                         |                 |
| 12                 | 12    | 24             | 78           | 3    | 1-wide   | 3                  | URB1228-3ASB            | PT, HG, MB      |
| 12                 | 12    | 24             | 78           | 3    | 3-wide   | 9                  | URB3228-3ASB            | PT, HG, MB      |
| 12                 | 15    | 24             | 78           | 3    | 1-wide   | 3                  | URB1258-3ASB            | PT, HG, MB      |
| 12                 | 15    | 24             | 78           | 3    | 3-wide   | 9                  | URB3258-3ASB            | PT, HG, MB      |
| 12                 | 18    | 24             | 78           | 3    | 1-wide   | 3                  | URB1288-3ASB            | PT, HG, MB      |
| 12                 | 18    | 24             | 78           | 3    | 3-wide   | 9                  | URB3288-3ASB            | PT, HG, MB      |
| <b>SIX TIERS</b>   |       |                |              |      |          |                    |                         |                 |
| 12                 | 12    | 12             | 78           | 6    | 1-wide   | 6                  | URB1228-6ASB            | PT, HG, MB      |
| 12                 | 12    | 12             | 78           | 6    | 3-wide   | 18                 | URB3228-6ASB            | PT, HG, MB      |
| 12                 | 15    | 12             | 78           | 6    | 1-wide   | 6                  | URB1258-6ASB            | PT, HG, MB      |
| 12                 | 15    | 12             | 78           | 6    | 3-wide   | 18                 | URB3258-6ASB            | PT, HG, MB      |
| 12                 | 18    | 12             | 78           | 6    | 1-wide   | 6                  | URB1288-6ASB            | PT, HG, MB      |
| 12                 | 18    | 12             | 78           | 6    | 3-wide   | 18                 | URB3288-6ASB            | PT, HG, MB      |

### COLOR SELECTION

729  
PARCHMENT (PT)

725  
HALLOWELL GRAY (HG)

707  
MARINE BLUE (MB)

5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS

STOCK → PROGRAM

THE FASTEST SHIPPING IN THE INDUSTRY...



# WHEN YOU NEED A LONG-LASTING ALTERNATIVE

## Galvanite™ Rust Resistant Lockers

*Galvanite lockers are fabricated from prime galvanized (hot-dipped zinc coated, annealed) sheet steel, then finished with an electrostatically applied high grade powder coat finish providing double protection against corrosion.*

### FEATURES:

**BODY CONSTRUCTION:** 24 gauge, galvanized corrosion resistant sheet steel

**BODY STYLES:** Single, double, triple and six tier

**DOOR:** 16 gauge, galvanized corrosion resistant sheet steel louvered for added ventilation, 18 gauge for box doors

**HINGES:** Continuous piano type

**HANDLE (wardrobe):** Stainless steel recessed handle with multi-point gravity lift-type latching. Recessed handle protects finish from being marred by padlock.

**HANDLE (box):** Box lockers include a projecting single-point friction catch door pull prepared for both padlock or built-in lock. No moving parts insures quiet maintenance-free operation.

**HOOKS:** One double prong ceiling hook and two single hooks per single and double tier opening. One double ceiling hook for triple tier. No hooks for six tier lockers.

**COAT RODS:** Available for single tier at a nominal cost

**SHELVES:** Hat shelf is included in single tier lockers.

**LEGS:** 6" high legs are standard. Lockers without legs are available for a nominal charge.



Single Tier,  
1 wide,  
1 opening



Double Tier,  
1 wide,  
2 openings



Triple Tier,  
3 wide,  
9 openings



Six Tier,  
3 wide,  
18 openings

**With Piano  
Hinge**



**COLOR  
SELECTION**

729  
PARCHMENT (PT)

# IDEAL FOR HIGH HUMIDITY AND CORROSION PRONE AREAS

# Hallowell

**GALVANITE™ RUST RESISTANT LOCKERS**

## Galvanite™ Corrosion Resistant Sheet Steel prevents rust and corrosion

**Galvanite™, is List Industries' trade marked name for lockers and cabinets** manufactured with galvanized sheet steel components and finished with an electrostatically applied high-grade powder coat finish. Galvanneal and powder coat offer exceptional double protection against corrosion, even under the most adverse conditions. Tests indicate that galvanneal increases the estimated lifecycle threefold.

### WHAT IS GALVANNEAL?

Galvanneal is the result of the combined processes of galvanizing (hot-dipped zinc coating) and annealing (heat treatment). Galvanneal does not flake when formed or stamped. The very fine matte finish acts like a primer that easily adheres to paint.

These characteristics make galvannealed sheet steel ideal for steel lockers in high humidity, corrosion prone areas.



**Galvanite™ cold rolled sheet steel with our powder coat finish after a 336 hour salt spray test.**



**Common cold rolled sheet steel after a 336 hour salt spray test.**

**Ideal for use in high humidity areas, outdoor locations, near shower or pool areas and food industry facilities.**



Triple Tier,  
1 wide,  
3 openings

| Width              | Depth | Opening Height | Frame Height | Tier | Grouping | Openings Per Group | Knock-down Cat No. | Fully-Assembled Cat No. | Color Selection |
|--------------------|-------|----------------|--------------|------|----------|--------------------|--------------------|-------------------------|-----------------|
| <b>SINGLE TIER</b> |       |                |              |      |          |                    |                    |                         |                 |
| 12                 | 12    | 72             | 78           | 1    | 1-wide   | 1                  | U1228-1G           | U1228-1GA               | PT              |
| 12                 | 12    | 72             | 78           | 1    | 3-wide   | 3                  | U3228-1G           | U3228-1GA               | PT              |
| 12                 | 15    | 72             | 78           | 1    | 1-wide   | 1                  | U1258-1G           | U1258-1GA               | PT              |
| 12                 | 15    | 72             | 78           | 1    | 3-wide   | 3                  | U3258-1G           | U3258-1GA               | PT              |
| 12                 | 18    | 72             | 78           | 1    | 1-wide   | 1                  | U1288-1G           | U1288-1GA               | PT              |
| 12                 | 18    | 72             | 78           | 1    | 3-wide   | 3                  | U3288-1G           | U3288-1GA               | PT              |
| <b>DOUBLE TIER</b> |       |                |              |      |          |                    |                    |                         |                 |
| 12                 | 12    | 36             | 78           | 2    | 1-wide   | 2                  | U1228-2G           | U1228-2GA               | PT              |
| 12                 | 12    | 36             | 78           | 2    | 3-wide   | 6                  | U3228-2G           | U3228-2GA               | PT              |
| 12                 | 15    | 36             | 78           | 2    | 1-wide   | 2                  | U1258-2G           | U1258-2GA               | PT              |
| 12                 | 15    | 36             | 78           | 2    | 3-wide   | 6                  | U3258-2G           | U3258-2GA               | PT              |
| 12                 | 18    | 36             | 78           | 2    | 1-wide   | 2                  | U1288-2G           | U1288-2GA               | PT              |
| 12                 | 18    | 36             | 78           | 2    | 3-wide   | 6                  | U3288-2G           | U3288-2GA               | PT              |
| <b>TRIPLE TIER</b> |       |                |              |      |          |                    |                    |                         |                 |
| 12                 | 12    | 24             | 78           | 3    | 1-wide   | 3                  | U1228-3G           | U1228-3GA               | PT              |
| 12                 | 12    | 24             | 78           | 3    | 3-wide   | 9                  | U3228-3G           | U3228-3GA               | PT              |
| 12                 | 15    | 24             | 78           | 3    | 1-wide   | 3                  | U1258-3G           | U1258-3GA               | PT              |
| 12                 | 15    | 24             | 78           | 3    | 3-wide   | 9                  | U3258-3G           | U3258-3GA               | PT              |
| 12                 | 18    | 24             | 78           | 3    | 1-wide   | 3                  | U1288-3G           | U1288-3GA               | PT              |
| 12                 | 18    | 24             | 78           | 3    | 3-wide   | 9                  | U3288-3G           | U3288-3GA               | PT              |
| <b>SIX TIERS</b>   |       |                |              |      |          |                    |                    |                         |                 |
| 12                 | 12    | 12             | 78           | 6    | 1-wide   | 6                  | U1228-6G           | U1228-6GA               | PT              |
| 12                 | 12    | 12             | 78           | 6    | 3-wide   | 18                 | U3228-6G           | U3228-6GA               | PT              |
| 12                 | 15    | 12             | 78           | 6    | 1-wide   | 6                  | U1258-6G           | U1258-6GA               | PT              |
| 12                 | 15    | 12             | 78           | 6    | 3-wide   | 18                 | U3258-6G           | U3258-6GA               | PT              |
| 12                 | 18    | 12             | 78           | 6    | 1-wide   | 6                  | U1288-6G           | U1288-6GA               | PT              |
| 12                 | 18    | 12             | 78           | 6    | 3-wide   | 18                 | U3288-6G           | U3288-6GA               | PT              |

**COLOR SELECTION**

**729 PARCHMENT (PT)**

**5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS**

**19**

STOCK → PROGRAM

THE FASTEST SHIPPING IN THE INDUSTRY...



**SPECIALLY FORMULATED  
ANTIMICROBIAL FINISH**

**MedSafe™**

## Antimicrobial Health care Lockers

*Specially formulated powder coat finish protects against bacteria, mold, yeast & mildew for up to 20 years!*

### FEATURES:

**BODY CONSTRUCTION:** Knock-down, 24 gauge

**BODY STYLES:** Single and double tier

**CUSTOM FEATURES:** Antimicrobial finish

**DOOR:** 16 gauge, louvered for added ventilation,

**HINGES:** Continuous piano type

**HANDLE:** Stainless steel recessed handle with multi-point gravity lift-type latching. Recessed handle protects finish from being marred by padlock.

**HOOKS:** One double prong ceiling hook and two single hooks per single and double tier opening.

**COAT RODS:** Available for single tier at a nominal cost

**SHELVES:** Hat shelf is included in single tier lockers.

**LEGS:** All stock lockers are standard with 6" high legs. Lockers without legs are available for a nominal charge.



**With Piano Hinge**

HAT SHELF,  
COAT HOOKS  
AND 6" LEGS  
ARE STANDARD

Double Tier,  
1 wide,  
2 openings

Single Tier,  
1 wide,  
1 opening

**COLOR  
SELECTION**

**PLATINUM (PL)**

| Width              | Depth | Opg Hgt | Frm Hgt | Tier | Grouping | Openings Per Group | Knock-Down Cat No. | Fully-Assembled Cat No. | Color Selection |
|--------------------|-------|---------|---------|------|----------|--------------------|--------------------|-------------------------|-----------------|
| <b>SINGLE TIER</b> |       |         |         |      |          |                    |                    |                         |                 |
| 12                 | 18    | 72      | 78      | 1    | 1-wide   | 1                  | UMS1288-1          | UMS1288-1A              | PL              |
| 12                 | 18    | 72      | 78      | 1    | 3-wide   | 3                  | UMS3288-1          | UMS3288-1A              | PL              |
| 15                 | 18    | 72      | 78      | 1    | 1-wide   | 1                  | UMS1588-1          | UMS1588-1A              | PL              |
| 15                 | 18    | 72      | 78      | 1    | 3-wide   | 3                  | UMS3588-1          | UMS3588-1A              | PL              |
| 18                 | 18    | 72      | 78      | 1    | 1-wide   | 1                  | UMS1888-1          | UMS1888-1A              | PL              |
| 18                 | 18    | 72      | 78      | 1    | 3-wide   | 3                  | UMS3888-1          | UMS3888-1A              | PL              |
| <b>DOUBLE TIER</b> |       |         |         |      |          |                    |                    |                         |                 |
| 12                 | 18    | 36      | 78      | 2    | 1-wide   | 2                  | UMS1288-2          | UMS1288-2A              | PL              |
| 12                 | 18    | 36      | 78      | 2    | 3-wide   | 6                  | UMS3288-2          | UMS3288-2A              | PL              |
| 15                 | 18    | 36      | 78      | 2    | 1-wide   | 2                  | UMS1588-2          | UMS1588-2A              | PL              |
| 15                 | 18    | 36      | 78      | 2    | 3-wide   | 6                  | UMS3588-2          | UMS3588-2A              | PL              |

**HALLOWELL QUALITY  
TO FIT A SMALL BUDGET**



**Hallowell**

VALUEMAX™ ECONOMY LOCKERS

# ValueMax™

economy lockers

**ValueMax lockers offer exceptional value, quality and finish at an affordable price.**

## FEATURES:

**BODY CONSTRUCTION:** Knock-down, 24 gauge

**BODY STYLES:** Single, double and triple tier

**DOOR:** 16 gauge, louvered for added ventilation

**HINGES:** Continuous piano type

**HANDLE:** Single-point thru-the-door friction catch door pull designed for use with a padlock

**HOOKS:** One double prong ceiling hook and two single hooks per single and double tier opening. One double ceiling hook for triple tier.

**COAT RODS:** Available for single tier at a nominal cost

**SHELVES:** Hat shelf is included in single tier lockers.


**LEGS:** 6" high legs are standard. Lockers without legs are available for a nominal charge.



**ValueMax lockers are the perfect solution for limited budget projects.**

| Width              | Depth | Opening Height | Frame Height | Tier | Grouping | Openings Per Group | Knock-Down Cat No. | Fully-Assembled Cat No. | Color Selection |
|--------------------|-------|----------------|--------------|------|----------|--------------------|--------------------|-------------------------|-----------------|
| <b>SINGLE TIER</b> |       |                |              |      |          |                    |                    |                         |                 |
| 12                 | 12    | 72             | 78           | 1    | 1-wide   | 1                  | UH1228-1           | UH1228-1A               | PT, HG          |
| 12                 | 12    | 72             | 78           | 1    | 3-wide   | 3                  | UH3228-1           | UH3228-1A               | PT, HG          |
| 12                 | 15    | 72             | 78           | 1    | 1-wide   | 1                  | UH1258-1           | UH1258-1A               | PT, HG          |
| 12                 | 15    | 72             | 78           | 1    | 3-wide   | 3                  | UH3258-1           | UH3258-1A               | PT, HG          |
| 12                 | 18    | 72             | 78           | 1    | 1-wide   | 1                  | UH1288-1           | UH1288-1A               | PT, HG          |
| 12                 | 18    | 72             | 78           | 1    | 3-wide   | 3                  | UH3288-1           | UH3288-1A               | PT, HG          |
| <b>DOUBLE TIER</b> |       |                |              |      |          |                    |                    |                         |                 |
| 12                 | 12    | 36             | 78           | 2    | 1-wide   | 2                  | UH1228-2           | UH1228-2A               | PT, HG          |
| 12                 | 12    | 36             | 78           | 2    | 3-wide   | 6                  | UH3228-2           | UH3228-2A               | PT, HG          |
| 12                 | 15    | 36             | 78           | 2    | 1-wide   | 2                  | UH1258-2           | UH1258-2A               | PT, HG          |
| 12                 | 15    | 36             | 78           | 2    | 3-wide   | 6                  | UH3258-2           | UH3258-2A               | PT, HG          |
| 12                 | 18    | 36             | 78           | 2    | 1-wide   | 2                  | UH1288-2           | UH1288-2A               | PT, HG          |
| 12                 | 18    | 36             | 78           | 2    | 3-wide   | 6                  | UH3288-2           | UH3288-2A               | PT, HG          |
| <b>TRIPLE TIER</b> |       |                |              |      |          |                    |                    |                         |                 |
| 12                 | 12    | 24             | 78           | 3    | 1-wide   | 3                  | UH1228-3           | UH1228-3A               | PT, HG          |
| 12                 | 12    | 24             | 78           | 3    | 3-wide   | 9                  | UH3228-3           | UH3228-3A               | PT, HG          |
| 12                 | 15    | 24             | 78           | 3    | 1-wide   | 3                  | UH1258-3           | UH1258-3A               | PT, HG          |
| 12                 | 15    | 24             | 78           | 3    | 3-wide   | 9                  | UH3258-3           | UH3258-3A               | PT, HG          |
| 12                 | 18    | 24             | 78           | 3    | 1-wide   | 3                  | UH1288-3           | UH1288-3A               | PT, HG          |
| 12                 | 18    | 24             | 78           | 3    | 3-wide   | 9                  | UH3288-3           | UH3288-3A               | PT, HG          |

**With Piano Hinge**



**5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS**

STOCK → PROGRAM


THE FASTEST SHIPPING IN THE INDUSTRY...



# WHEN MONITORING OF LOCKER CONTENTS IS REQUIRED

## KD Wardrobe Lockers

# SAFETY VIEW®

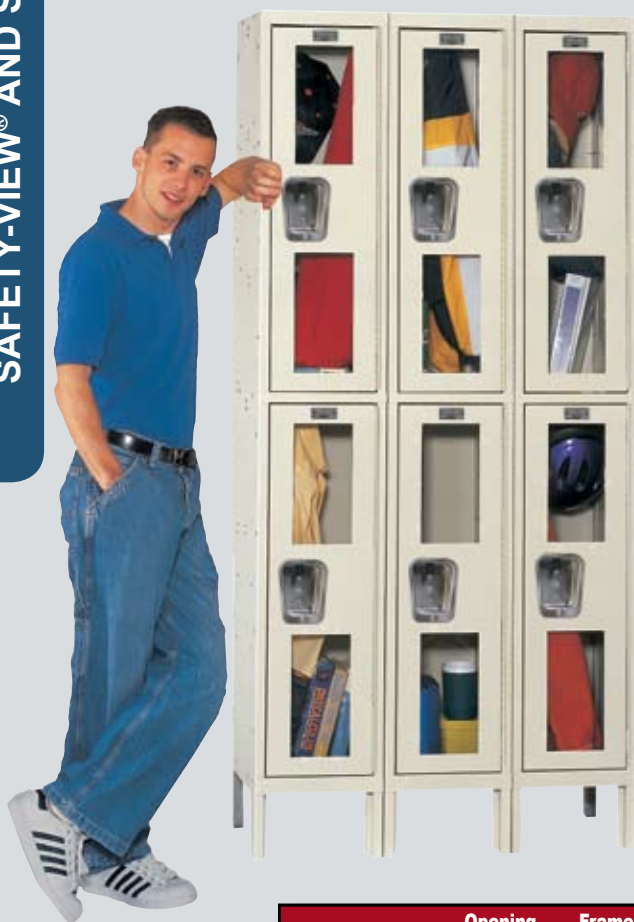Double Tier,  
3 wide,  
6 openings

### WARDROBE LOCKER FEATURES:

**BODY CONSTRUCTION:** Knock-down, 24 gauge

**BODY STYLES:** Single, double and triple tier

**DOOR:** 16 gauge steel with two high strength injection molded polycarbonate panels per door for easy content viewing

**HINGES:** Continuous piano type

**HANDLE:** Stainless steel recessed handle with multi-point gravity lift-type latching. Recessed handle protects finish from being marred by padlock.

**HOOKS:** One double prong ceiling hook and two single hooks per single and double tier opening. One double ceiling hook for triple tier

**COAT RODS:** Available for single tier at a nominal cost

**SHELVES:** Hat shelf is included in single tier lockers

**LEGS:** 6" high legs are standard. Lockers without legs are available for a nominal charge.

**NOTES:** Meets UL flammability standards, Polycarbonate is approved by the Consumer Product Safety Commission (CPSC16CFR 1201)

**With Piano  
Hinge**

| Width              | Depth | Opening Height | Frame Height | Tier | Grouping | Opening Per Group | Knock-Down Cat No. | Fully-Assembled Cat No. | Color Selection |
|--------------------|-------|----------------|--------------|------|----------|-------------------|--------------------|-------------------------|-----------------|
| <b>SINGLE TIER</b> |       |                |              |      |          |                   |                    |                         |                 |
| 12                 | 12    | 72             | 78           | 1    | 1-wide   | 1                 | USV1228-1          | USV1228-1A              | PT              |
| 12                 | 12    | 72             | 78           | 1    | 3-wide   | 3                 | USV3228-1          | USV3228-1A              | PT              |
| 12                 | 15    | 72             | 78           | 1    | 1-wide   | 1                 | USV1258-1          | USV1258-1A              | PT              |
| 12                 | 15    | 72             | 78           | 1    | 3-wide   | 3                 | USV3258-1          | USV3258-1A              | PT              |
| 12                 | 18    | 72             | 78           | 1    | 1-wide   | 1                 | USV1288-1          | USV1288-1A              | PT              |
| 12                 | 18    | 72             | 78           | 1    | 3-wide   | 3                 | USV3288-1          | USV3288-1A              | PT              |
| <b>DOUBLE TIER</b> |       |                |              |      |          |                   |                    |                         |                 |
| 12                 | 12    | 36             | 78           | 2    | 1-wide   | 2                 | USV1228-2          | USV1228-2A              | PT              |
| 12                 | 12    | 36             | 78           | 2    | 3-wide   | 6                 | USV3228-2          | USV3228-2A              | PT              |
| 12                 | 15    | 36             | 78           | 2    | 1-wide   | 2                 | USV1258-2          | USV1258-2A              | PT              |
| 12                 | 15    | 36             | 78           | 2    | 3-wide   | 6                 | USV3258-2          | USV3258-2A              | PT              |
| 12                 | 18    | 36             | 78           | 2    | 1-wide   | 2                 | USV1288-2          | USV1288-2A              | PT              |
| 12                 | 18    | 36             | 78           | 2    | 3-wide   | 6                 | USV3288-2          | USV3288-2A              | PT              |
| <b>TRIPLE TIER</b> |       |                |              |      |          |                   |                    |                         |                 |
| 12                 | 12    | 24             | 78           | 3    | 1-wide   | 3                 | USV1228-3          | USV1228-3A              | PT              |
| 12                 | 12    | 24             | 78           | 3    | 3-wide   | 9                 | USV3228-3          | USV3228-3A              | PT              |
| 12                 | 15    | 24             | 78           | 3    | 1-wide   | 3                 | USV1258-3          | USV1258-3A              | PT              |
| 12                 | 15    | 24             | 78           | 3    | 3-wide   | 9                 | USV3258-3          | USV3258-3A              | PT              |
| 12                 | 18    | 24             | 78           | 3    | 1-wide   | 3                 | USV1288-3          | USV1288-3A              | PT              |
| 12                 | 18    | 24             | 78           | 3    | 3-wide   | 9                 | USV3288-3          | USV3288-3A              | PT              |



**COLOR  
SELECTION**

729  
PARCHMENT (PT)

**SEE WHAT YOU  
ARE MISSING**



**Hallowell**

**SAFETY-VIEW® AND SAFETY-VIEW® PLUS**

**SAFETY  
VIEW®  
PLUS**

## KD Box Lockers

### BOX LOCKER FEATURES:

**BODY CONSTRUCTION:** Knock-down, 24 gauge  
**BODY STYLES:** Six tier, Sixteen Person and wall mount  
**DOOR:** High strength injection molded clear polycarbonate doors for unobstructed content viewing  
**HINGES:** Continuous piano type  
**HANDLE:** Single-point projecting friction catch door pull prepared for both padlock or built-in lock  
**HOOKS:** None  
**COAT RODS:** Standard on Sixteen person  
**SHELVES:** None  
**LEGS:** 6" high legs are standard. Lockers without legs are available for a nominal charge  
**NOTES:** Meets UL flammability standards, Polycarbonate is approved by the Consumer Product Safety Commission (CPSC16CFR 1201)  
 U.S. Patent No. D458 064S

### GENERAL FEATURES:

- Aluminum number plates (#1-up) with mounting hardware are included.
- Locks are not included.
- Safety-View plus doors provide an unobstructed view of locker contents
- Can be ordered fully-assembled or knock-down for assembly at destination
- Order 3-wide units for best value. Order 1-wide units to complete quantity needed for each continuous row
- Available for immediate



Six Tier,  
3 wide,  
18 openings



**ADA  
Compliant  
Lockers**



Sixteen person shown  
with optional closed  
base



4 Wide wall mount



Unobstructed  
view of locker  
contents

| Width                    | Depth | Opening Height | Frame Height | Tier              | Grouping | Opening Per Group | Knock-Down Cat No. | Fully-Assembled Cat No. | Color Selection |
|--------------------------|-------|----------------|--------------|-------------------|----------|-------------------|--------------------|-------------------------|-----------------|
| <b>SIX TIERS</b>         |       |                |              |                   |          |                   |                    |                         |                 |
| 12                       | 12    | 12             | 78           | 6                 | 1-wide   | 6                 | USVP1228-6         | USVP1228-6A             | PT              |
| 12                       | 12    | 12             | 78           | 6                 | 3-wide   | 18                | USVP3228-6         | USVP3228-6A             | PT              |
| 12                       | 15    | 12             | 78           | 6                 | 1-wide   | 6                 | USVP1258-6         | USVP1258-6A             | PT              |
| 12                       | 15    | 12             | 78           | 6                 | 3-wide   | 18                | USVP3258-6         | USVP3258-6A             | PT              |
| 12                       | 18    | 12             | 78           | 6                 | 1-wide   | 6                 | USVP1288-6         | USVP1288-6A             | PT              |
| 12                       | 18    | 12             | 78           | 6                 | 3-wide   | 18                | USVP3288-6         | USVP3288-6A             | PT              |
| <b>4-WIDE WALL MOUNT</b> |       |                |              |                   |          |                   |                    |                         |                 |
| 48                       | 18    | 12             | 14-3/4       | 4-Wide Wall Mount |          | 4                 | USVP1482-4WM       | USVP1482-4WMA           | PT              |
| <b>16-PERSON UNIT</b>    |       |                |              |                   |          |                   |                    |                         |                 |
| 72                       | 18    | 12             | 78           | 16-Person Unit    |          | 16                | USVP1788-16        | USVP1788-16A            | PT              |
| <b>ADA UNIT</b>          |       |                |              |                   |          |                   |                    |                         |                 |
| 12                       | 12    | 12/36          | 78           | ADA               | 1-wide   | 4                 | USVP1228ADA        | USVP1228ADA-A           | PT              |
| 12                       | 12    | 12/36          | 78           | ADA               | 3-wide   | 12                | USVP3228ADA        | USVP3228ADA-A           | PT              |
| 12                       | 15    | 12/36          | 78           | ADA               | 1-wide   | 4                 | USVP1258ADA        | USVP1258ADA-A           | PT              |
| 12                       | 15    | 12/36          | 78           | ADA               | 3-wide   | 12                | USVP3258ADA        | USVP3258ADA-A           | PT              |
| 12                       | 18    | 12/36          | 78           | ADA               | 1-wide   | 4                 | USVP1288ADA        | USVP1288ADA-A           | PT              |
| 12                       | 18    | 12/36          | 78           | ADA               | 3-wide   | 12                | USVP3288ADA        | USVP3288ADA-A           | PT              |

**COLOR  
SELECTION**

**729  
PARCHMENT (PT)**

**5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS**

**23**

**STOCK** → **PROGRAM**

THE FASTEST SHIPPING IN THE INDUSTRY...




## Heavy-Duty Ventilated (HDV) KD Stock Lockers



- ✓ Ventilated doors and sides
- ✓ Heavy gauge door and body
- ✓ Large capacity sizes available
- ✓ Strength and ventilation in one practical locker




Double Tier,  
1 wide,  
2 openings

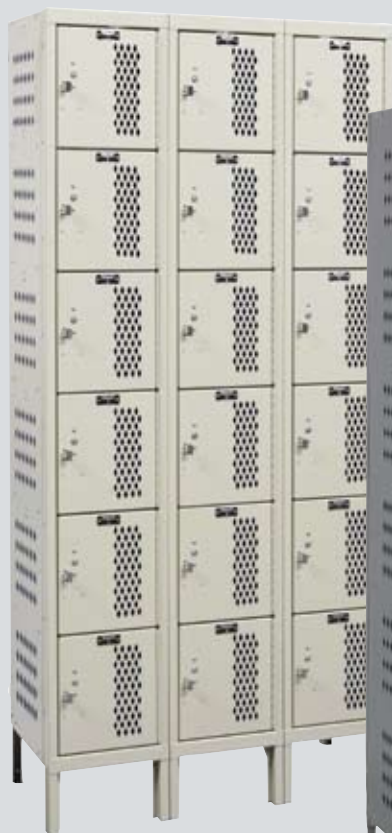

Six Tier,  
3 wide,  
18 openings



Double Tier,  
3 wide,  
6 opening



Six Tier,  
1 wide,  
6 openings



Six Tier,  
1 wide,  
6 openings



Single Tier,  
1 wide,  
1 opening



**COLOR  
SELECTION**

729  
PARCHMENT (PT)

725  
HALLOWELL GRAY (HG)



# WHEN STRENGTH AND VENTILATION MATTER

# Hallowell®

HEAVY-DUTY VENTILATED (HDV) LOCKERS

## FEATURES:

**BODY CONSTRUCTION:** Knock-down, 16 gauge body with 18 gauge back. Sides are diamond perforated for maximum ventilation

**BODY STYLES:** Single, double and six tier

**DOOR:** 14 gauge, diamond perforated for maximum ventilation

**HINGES:** Continuous piano type

**HANDLE (wardrobe):** Stainless steel recessed handle with multi-point gravity lift-type latching. Recessed handle protects finish from being marred by padlock.

**HANDLE (box):** Box lockers include a projecting single-point friction catch door pull prepared for both padlock or built-in lock. No moving parts insures quiet maintenance-free operation.

**HOOKS:** One double prong ceiling hook and two single hooks per single and double tier opening. One double ceiling hook for triple tier.

**COAT RODS:** Available for single tier at a nominal cost

**SHELVES:** Hat shelf is included in single tier lockers.

**LEGS:** 6" high legs are standard. Lockers without legs are available for a nominal charge.



Single Tier,  
1 wide,  
1 opening



Single Tier,  
1 wide,  
1 opening

| Width              | Depth | Opening Height | Frame Height | Tier | Grouping | Openings Per Group | Knock-down Cat No. | Fully-Assembled Cat No. | Color Selection |
|--------------------|-------|----------------|--------------|------|----------|--------------------|--------------------|-------------------------|-----------------|
| <b>SINGLE TIER</b> |       |                |              |      |          |                    |                    |                         |                 |
| 12                 | 12    | 72             | 78           | 1    | 1-wide   | 1                  | U1228-1HDV         | U1228-1HV-A             | PT, HG          |
| 12                 | 12    | 72             | 78           | 1    | 3-wide   | 3                  | U3228-1HDV         | U3228-1HV-A             | PT, HG          |
| 12                 | 15    | 72             | 78           | 1    | 1-wide   | 1                  | U1258-1HDV         | U1258-1HV-A             | PT, HG          |
| 12                 | 15    | 72             | 78           | 1    | 3-wide   | 3                  | U3258-1HDV         | U3258-1HV-A             | PT, HG          |
| 12                 | 18    | 72             | 78           | 1    | 1-wide   | 1                  | U1288-1HDV         | U1288-1HV-A             | PT, HG          |
| 12                 | 18    | 72             | 78           | 1    | 3-wide   | 3                  | U3288-1HDV         | U3288-1HV-A             | PT, HG          |
| 15                 | 15    | 72             | 78           | 1    | 1-wide   | 1                  | U1558-1HDV         | U1558-1HV-A             | PT, HG          |
| 15                 | 15    | 72             | 78           | 1    | 3-wide   | 3                  | U3558-1HDV         | U3558-1HV-A             | PT, HG          |
| 15                 | 18    | 72             | 78           | 1    | 1-wide   | 1                  | U1588-1HDV         | U1588-1HV-A             | PT, HG          |
| 15                 | 18    | 72             | 78           | 1    | 3-wide   | 3                  | U3588-1HDV         | U3588-1HV-A             | PT, HG          |
| 15                 | 21    | 72             | 78           | 1    | 1-wide   | 1                  | U1518-1HDV         | U1518-1HV-A             | PT, HG          |
| 15                 | 21    | 72             | 78           | 1    | 3-wide   | 3                  | U3518-1HDV         | U3518-1HV-A             | PT, HG          |
| 18                 | 18    | 72             | 78           | 1    | 1-wide   | 1                  | U1888-1HDV         | U1888-1HV-A             | PT, HG          |
| 18                 | 18    | 72             | 78           | 1    | 3-wide   | 3                  | U3888-1HDV         | U3888-1HV-A             | PT, HG          |
| 18                 | 21    | 72             | 78           | 1    | 1-wide   | 1                  | U1818-1HDV         | U1818-1HV-A             | PT, HG          |
| 18                 | 21    | 72             | 78           | 1    | 3-wide   | 3                  | U3818-1HDV         | U3818-1HV-A             | PT, HG          |
| <b>DOUBLE TIER</b> |       |                |              |      |          |                    |                    |                         |                 |
| 12                 | 12    | 36             | 78           | 2    | 1-wide   | 2                  | U1228-2HDV         | U1228-2HV-A             | PT, HG          |
| 12                 | 12    | 36             | 78           | 2    | 3-wide   | 6                  | U3228-2HDV         | U3228-2HV-A             | PT, HG          |
| 12                 | 15    | 36             | 78           | 2    | 1-wide   | 2                  | U1258-2HDV         | U1258-2HV-A             | PT, HG          |
| 12                 | 15    | 36             | 78           | 2    | 3-wide   | 6                  | U3258-2HDV         | U3258-2HV-A             | PT, HG          |
| 12                 | 18    | 36             | 78           | 2    | 1-wide   | 2                  | U1288-2HDV         | U1288-2HV-A             | PT, HG          |
| 12                 | 18    | 36             | 78           | 2    | 3-wide   | 6                  | U3288-2HDV         | U3288-2HV-A             | PT, HG          |
| 15                 | 15    | 36             | 78           | 2    | 1-wide   | 2                  | U1558-2HDV         | U1558-2HV-A             | PT, HG          |
| 15                 | 15    | 36             | 78           | 2    | 3-wide   | 6                  | U3558-2HDV         | U3558-2HV-A             | PT, HG          |
| 15                 | 18    | 36             | 78           | 2    | 1-wide   | 2                  | U1588-2HDV         | U1588-2HV-A             | PT, HG          |
| 15                 | 18    | 36             | 78           | 2    | 3-wide   | 6                  | U3588-2HDV         | U3588-2HV-A             | PT, HG          |
| 15                 | 21    | 36             | 78           | 2    | 1-wide   | 2                  | U1518-2HDV         | U1518-2HV-A             | PT, HG          |
| 15                 | 21    | 36             | 78           | 2    | 3-wide   | 6                  | U3518-2HDV         | U3518-2HV-A             | PT, HG          |
| 18                 | 18    | 36             | 78           | 2    | 1-wide   | 2                  | U1888-2HDV         | U1888-2HV-A             | PT, HG          |
| 18                 | 18    | 36             | 78           | 2    | 3-wide   | 6                  | U3888-2HDV         | U3888-2HV-A             | PT, HG          |
| 18                 | 21    | 36             | 78           | 2    | 1-wide   | 2                  | U1818-2HDV         | U1818-2HV-A             | PT, HG          |
| 18                 | 21    | 36             | 78           | 2    | 3-wide   | 6                  | U3818-2HDV         | U3818-2HV-A             | PT, HG          |
| <b>SIX TIERS</b>   |       |                |              |      |          |                    |                    |                         |                 |
| 12                 | 12    | 12             | 78           | 6    | 1-wide   | 6                  | U1228-6HDV         | U1228-6HV-A             | PT, HG          |
| 12                 | 12    | 12             | 78           | 6    | 3-wide   | 18                 | U3228-6HDV         | U3228-6HV-A             | PT, HG          |
| 12                 | 15    | 12             | 78           | 6    | 1-wide   | 6                  | U1258-6HDV         | U1258-6HV-A             | PT, HG          |
| 12                 | 15    | 12             | 78           | 6    | 3-wide   | 18                 | U3258-6HDV         | U3258-6HV-A             | PT, HG          |
| 12                 | 18    | 12             | 78           | 6    | 1-wide   | 6                  | U1288-6HDV         | U1288-6HV-A             | PT, HG          |
| 12                 | 18    | 12             | 78           | 6    | 3-wide   | 18                 | U3288-6HDV         | U3288-6HV-A             | PT, HG          |






5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS

25



STOCK → PROGRAM

# COMPLETE SELECTION OF LOCKER ACCESSORIES

THE FASTEST SHIPPING IN THE INDUSTRY...

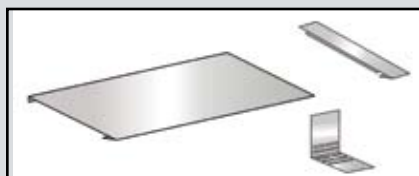INDIVIDUAL SLOPE  
TOPSEND CLOSURES  
FOR INDIVIDUAL  
SLOPE TOPSSLOPE TOP  
FILLERCLOSED FRONT AND  
SIDE BASE

CONTINUOUS SLOPE TOP

END CLOSURES  
FOR CONTINUOUS  
SLOPE TOPSSLOPE TOP  
CORNER


| Width   | Depth | Height | Cat. No.  | Color Selection    |
|---|-------|--------|-----------|--------------------|
| <b>INDIVIDUAL SLOPE TOPS</b>                        |       |        |           |                    |
| 12  | 12    | 4      | KISTT1212 | PT, HG, MB, GM, MN |
| 12  | 15    | 5      | KISTT1215 | PT, HG, MB, GM, MN |
| 12  | 18    | 6      | KISTT1218 | PT, HG, MB, GM, MN |
| 15  | 15    | 5      | KISTT1515 | PT, HG             |
| 15  | 18    | 6      | KISTT1518 | PT, HG             |
| 15  | 21    | 7      | KISTT1521 | PT                 |
| 18  | 18    | 6      | KISTT1818 | PT, HG             |
| 18  | 21    | 7      | KISTT1821 | PT, HG             |
| 18  | 24    | 8      | KISTT1824 | PT                 |
| <b>END CLOSURES (FOR INDIVIDUAL SLOPE TOPS)</b>     |       |        |           |                    |
|   | 12    | 4      | KISE12    | PT, HG, MB, GM, MN |
|   | 15    | 5      | KISE15    | PT, HG, MB, GM, MN |
|   | 18    | 6      | KISE18    | PT, HG, MB, GM, MN |
|   | 21    | 7      | KISE21    | PT, HG             |
|   | 24    | 8      | KISE24    | PT                 |
| <b>SLOPE TOP FILLER (FOR INDIVIDUAL SLOPE TOPS)</b> |       |        |           |                    |
| 6   | 12    | 4      | KSTF0612  | PT, HG, MB, GM, MN |
| 6   | 15    | 5      | KSTF0615  | PT, HG, MB, GM, MN |
| 6   | 18    | 6      | KSTF0618  | PT, HG, MB, GM, MN |
| 12  | 12    | 4      | KSTF1212  | PT, HG, MB, GM, MN |
| 12  | 15    | 5      | KSTF1215  | PT, HG, MB, GM, MN |
| 12  | 18    | 6      | KSTF1218  | PT, HG, MB, GM, MN |
| <b>CONTINUOUS SLOPE TOP</b>                         |       |        |           |                    |
| 72  | 12    | 4      | CST1272   | PT, HG, MB, GM, MN |
| 72  | 15    | 5      | CST1572   | PT, HG, MB, GM, MN |
| 72  | 18    | 6      | CST1872   | PT, HG, MB, GM, MN |
| <b>END CLOSURES (FOR CONTINUOUS SLOPE TOP)</b>      |       |        |           |                    |
|   | 12    | 4      | WCSE12    | PT, HG, MB, GM, MN |
|   | 15    | 5      | WCSE15    | PT, HG, MB, GM, MN |
|   | 18    | 6      | WCSE18    | PT, HG, MB, GM, MN |
| <b>SLOPE TOP CORNER</b>                             |       |        |           |                    |
|   | 12    | 12     | STC12     | PT, HG, MB, GM, MN |
|   | 15    | 15     | STC15     | PT, HG, MB, GM, MN |
|   | 18    | 18     | STC18     | PT, HG, MB, GM, MN |
| <b>CLOSED FRONT BASE</b>                            |       |        |           |                    |
| 12  |       | 6      | KCFB12    | PT, HG, MB, GM, MN |
| 15  |       | 6      | KCFB15    | PT, HG             |
| 18  |       | 6      | KCFB18    | PT, HG             |
| <b>CLOSED SIDE BASE</b>                             |       |        |           |                    |
| 12  |       | 6      | KCSB12    | PT, HG, MB, GM, MN |
| 15  |       | 6      | KCSB15    | PT, HG, MB, GM, MN |
| 18  |       | 6      | KCSB18    | PT, HG, MB, GM, MN |
| 21  |       | 6      | KCSB21    | PT, HG             |
| 24  |       | 6      | KCSB24    | PT                 |

# COMPLETE SELECTION OF LOCKER ACCESSORIES


# Hallowell®

ACCESSORY SELECTION


| Width                                | Depth | Height | Cat. No. | Color Selection    |
|--------------------------------------|-------|--------|----------|--------------------|
| <b>Z-BASE FRONTS</b>                 |       |        |          |                    |
| 72                                   |       | 4      | KZBF-N   | PT, HG, MB, GM, MN |
| <b>Z-BASE ENDS</b>                   |       |        |          |                    |
|                                      | 12    | 4      | KZBE12-N | PT, HG, MB, GM, MN |
|                                      | 15    | 4      | KZBE15-N | PT, HG, MB, GM, MN |
|                                      | 18    | 4      | KZBE18-N | PT, HG, MB, GM, MN |
| <b>Z-BASE SPLICE</b>                 |       |        |          |                    |
| 3                                    |       |        | KZBS-N   | PT                 |
| <b>TOP RECESSED TRIM</b>             |       |        |          |                    |
| 72                                   |       | 3      | KRT-T    | PT, HG, MB, GM, MN |
| <b>TOP RECESSED TRIM SPLICE</b>      |       |        |          |                    |
| 3                                    |       | 3      | KRT-SC   | PT, HG, MB, GM, MN |
| <b>SIDE RECESS TRIM</b>              |       |        |          |                    |
| 3                                    |       | 63     | KRT60L   | PT                 |
| 3                                    |       | 63     | KRT60R   | PT                 |
| 3                                    |       | 75     | KRT72L   | PT, HG, MB, GM, MN |
| 3                                    |       | 75     | KRT72R   | PT, HG, MB, GM, MN |
| <b>COAT RODS</b>                     |       |        |          |                    |
| 12                                   |       |        | KCR12    | Plated             |
| 15                                   |       |        | KCR15    | Plated             |
| 18                                   |       |        | KCR18    | Plated             |
| 21                                   |       |        | KCR21    | Plated             |
| 24                                   |       |        | KCR24    | Plated             |
| 7.5 (For Duplex and Two-Person only) |       |        | KCR15L   | Plated             |
| 7.5 (For Duplex and Two-Person only) |       |        | KCR15R   | Plated             |
| <b>FRONT FILLERS</b>                 |       |        |          |                    |
| 6                                    |       | 66     | KFSF0666 | PT                 |
| 12                                   |       | 66     | KFSF1266 | PT                 |
| 6                                    |       | 78     | KFSF0678 | PT, HG, MB, GM, MN |
| 12                                   |       | 78     | KFSF1278 | PT, HG, MB, GM, MN |
| <b>FILLER SLIP JOINTS</b>            |       |        |          |                    |
|                                      |       | 66     | KG66     | PT                 |
|                                      |       | 78     | KG78     | PT, HG, MB, GM, MN |
| <b>UNIVERSAL ANGLE</b>               |       |        |          |                    |
| 1                                    | 2     | 72     | AF010272 | PT                 |
| <b>FLAT TOP FILLERS</b>              |       |        |          |                    |
| 6                                    | 12    |        | KFTF0612 | PT, HG, MB, GM, MN |
| 6                                    | 15    |        | KFTF0615 | PT, HG, MB, GM, MN |
| 6                                    | 18    |        | KFTF0618 | PT, HG, MB, GM, MN |
| 12                                   | 12    |        | KFTF1212 | PT, HG, MB, GM, MN |
| 12                                   | 15    |        | KFTF1215 | PT, HG, MB, GM, MN |
| 12                                   | 18    |        | KFTF1218 | PT, HG, MB, GM, MN |
| <b>FLAT TOP CORNER</b>               |       |        |          |                    |
| 12                                   | 12    |        | FTC12    | PT, HG, MB, GM, MN |
| 15                                   | 15    |        | FTC15    | PT, HG, MB, GM, MN |
| 18                                   | 18    |        | FTC18    | PT, HG, MB, GM, MN |
| <b>UNIVERSAL END PANELS</b>          |       |        |          |                    |
|                                      | 12    | 60     | KMP1260  | PT, HG             |
|                                      | 15    | 60     | KMP1560  | PT, HG             |
|                                      | 18    | 60     | KMP1860  | PT, HG             |
|                                      | 12    | 72     | KMP1272  | PT, HG, MB, GM, MN |
|                                      | 15    | 72     | KMP1572  | PT, HG, MB, GM, MN |
|                                      | 18    | 72     | KMP1872  | PT, HG, MB, GM, MN |
|                                      | 21    | 72     | KMP2172  | PT, HG             |
|                                      | 24    | 72     | KMP2472  | PT                 |




RECESSED  
TRIM



FRONT FILLER AND  
SLIP JOINT




FLAT TOP FILLER

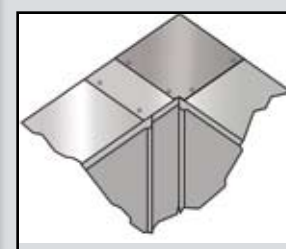


FLAT TOP CORNER



COAT RODS



UNIVERSAL END PANEL

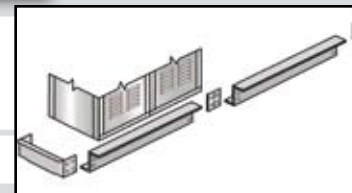

Z-BASE FRONTS,  
ENDS, SPLICE

5 DAY SHIPPING ON ALL IN-STOCK ACCESSORIES

**STOCK** → **PROGRAM**

**Quick Ship**

THE FASTEST SHIPPING IN THE INDUSTRY...

**PRACTICAL, EFFICIENT  
AND AN INNOVATIVE SOLUTION  
TO UNIFORM HANDLING**



# UNIFORM

## Exchange Lockers™

**The Industry Standard in the Uniform  
Distribution System.**



**COLOR  
SELECTION**

725  
HALLOWELL GRAY  
(HG)

**9 Person Uniform  
Exchange Locker  
Model HUE454-9P**

**8 Person Uniform  
Exchange Locker  
Model HUE214-8P**

# FIVE DISTINCT MODELS TO CHOOSE FROM



# Hallowell

UNIFORM EXCHANGE LOCKERS



Half Height Hanging  
Uniform Locker  
Model HUE214-2



User doors re-inforced at  
latches



Heavy-duty padlock handles  
(locks not included)



Main door latch  
hooks welded  
to frame

## FEATURES:

**BODY CONSTRUCTION:** 24 gauge, backs perforated for ventilation, galvanized bottoms

**BODY STYLES:** Full and half height hanging uniform lockers, 9 person folded uniform exchange lockers, 8 person hanging uniform exchange locker, soiled uniform locker

**DOOR:** User doors are 20 gauge (louvered at 8 and 9 Person)

**HINGES:** 5 knuckle

**FRAME:** Master door frame is 16 gauge

**LATCHING: Master Door:** Multi-point with industry standard key lock **User Doors:** Single-point turn latch for padlocks (locks not included)

**COAT RODS:** Standard for full and half height hanging uniform lockers and 8-Person exchange lockers

**NOTES:** All uniform exchange lockers ship fully-assembled



Full Height Hanging  
Uniform Locker  
Model HUE214-1



Soiled Uniform  
Exchange Locker  
Model HUE614-1

| Width   | Depth | Frame Height | Opening Dimension (W x H)  | Grouping | Openings Per Group | Catalog No. | Color |
|---------|-------|--------------|----------------------------|----------|--------------------|-------------|-------|
| 32-9/16 | 21    | 84           | 6-1/2 x 38-3/4             | 1-wide   | 8                  | HUE214-8P   | HG    |
| 24      | 15    | 84           | 18-1/8 x 8-3/4             | 1-wide   | 9                  | HUE454-9P   | HG    |
| 26      | 21    | 84           | 23-7/8 x 11 (laundry door) | 1-wide   | 1                  | HUE614-SC   | HG    |
| 32-9/16 | 21    | 84           | 30-1/2 x 81-3/4            | 1-wide   | 1                  | HUE214-1    | HG    |
| 32-9/16 | 21    | 84           | 30-1/2 x 81-3/4            | 1-wide   | 1                  | HUE214-2    | HG    |

5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS

29

STOCK → PROGRAM

THE FASTEST SHIPPING IN THE INDUSTRY...



# THE PRESTIGE OF FINE WOOD, THE AFFORDABLE PRICE OF KD LOCKERS

## HALLOWELL® Hybrid Lockers WOOD/METAL

### GENERAL FEATURES:

- Lockers can be ordered fully-assembled or knock-down for assembly at destination.
- Order 3-wide units for best value. Order 1-wide units to complete quantity needed for each continuous row.
- Aluminum number plates (#1-up) with mounting hardware are included. Number plate face is black with silver etched numerals. If a special numbering sequence is required, please specify when ordering. Number sequence must be consecutive numbers equal to the number of openings (doors) ordered.
- Built-in key locks are included.

### FEATURES:

**BODY CONSTRUCTION:** Knock-down, 24 gauge sheet steel

**BODY STYLES:** Single, double and triple tier

**DOOR:** Furniture grade red oak plywood, finished with 3 coats of lacquer

**HINGES:** Continuous piano type

**HOOKS:** Two single hooks per single and double tier opening. One double prong ceiling hook for triple tier.

**COAT RODS:** Standard for single and double tier

**SHELVES:** Hat shelf in single tier lockers only.

**LEGS:** 6" high legs are standard. Lockers without legs are available at a nominal charge

**APPEARANCE:** Color: black frame with red oak doors

**NOTE:** Other optional locking methods also available

Includes Key Lock

Single tier,  
1 wideDouble tier,  
1 wideTriple tier,  
1 wide

COLOR  
SELECTION

708 MIDNIGHT  
EBONY (ME)

RED OAK  
DOORS

Red Oak Doors and Steel Frame & Body  
All lockers shown with optional closed metal base



| Width                     | Depth | Opening Height | Frame Height | Tier | Grouping | Openings Per Group | Knock-Down Cat No. | Fully-Assembled Cat No. | Color Selection |
|---------------------------|-------|----------------|--------------|------|----------|--------------------|--------------------|-------------------------|-----------------|
| <b>SINGLE TIER</b>        |       |                |              |      |          |                    |                    |                         |                 |
| 12                        | 18    | 72             | 78           | 1    | 1-wide   | 1                  | UW1288-1MEW        | UW1288-1A-MEW           | ME/Wood         |
| 12                        | 18    | 72             | 78           | 1    | 3-wide   | 3                  | UW3288-1MEW        | UW3288-1A-MEW           | ME/Wood         |
| 15                        | 18    | 72             | 78           | 1    | 1-wide   | 1                  | UW1588-1MEW        | UW1588-1A-MEW           | ME/Wood         |
| 15                        | 18    | 72             | 78           | 1    | 3-wide   | 3                  | UW3588-1MEW        | UW3588-1A-MEW           | ME/Wood         |
| <b>DOUBLE TIER</b>        |       |                |              |      |          |                    |                    |                         |                 |
| 12                        | 18    | 36             | 78           | 2    | 1-wide   | 2                  | UW1288-2MEW        | UW1288-2A-MEW           | ME/Wood         |
| 12                        | 18    | 36             | 78           | 2    | 3-wide   | 6                  | UW3288-2MEW        | UW3288-2A-MEW           | ME/Wood         |
| 15                        | 18    | 36             | 78           | 2    | 1-wide   | 2                  | UW1588-2MEW        | UW1588-2A-MEW           | ME/Wood         |
| 15                        | 18    | 36             | 78           | 2    | 3-wide   | 6                  | UW3588-2MEW        | UW3588-2A-MEW           | ME/Wood         |
| <b>TRIPLE TIER</b>        |       |                |              |      |          |                    |                    |                         |                 |
| 12                        | 18    | 24             | 78           | 3    | 1-wide   | 3                  | UW1288-3MEW        | UW1288-3A-MEW           | ME/Wood         |
| 12                        | 18    | 24             | 78           | 3    | 3-wide   | 9                  | UW3288-3MEW        | UW3288-3A-MEW           | ME/Wood         |
| <b>Accessories</b>        |       |                |              |      |          |                    |                    |                         |                 |
| <b>CLOSED FRONT BASES</b> |       |                |              |      |          |                    |                    |                         |                 |
| 12                        |       | 6              |              |      |          |                    | KCFB12ME           |                         | ME              |
| 15                        |       | 6              |              |      |          |                    | KCFB15ME           |                         | ME              |
| <b>CLOSED SIDE BASES</b>  |       |                |              |      |          |                    |                    |                         |                 |
|                           | 18    | 6              |              |      |          |                    | KCSB18ME           |                         | ME              |

STOCK → PROGRAM

# FURNITURE GRADE WARDROBE WOOD LOCKERS

THE FASTEST SHIPPING IN THE INDUSTRY...

## Club Lockers



### FEATURES:

**BODY CONSTRUCTION:** Wood lockers shall be fabricated from  $\frac{3}{4}$ " plain sliced red oak plywood throughout including sides, backs and hat shelves.

**BODY STYLES:** Single, double and triple tier

**FINISH:** All interior/front faces to be finished with a three coat catalyzed clear cabinet lacquer or equivalent.

**DOOR:** Furniture grade red oak plywood, finished with 3 coats of lacquer

**HINGES:** Concealed european-style cabinet hinges

**HOOKS:** Two single hooks per single and double tier opening. One double prong ceiling hook for triple tier.

**COAT RODS:** Standard for single and double tier

**SHELVES:** Hat shelf is included in single tier lockers.

**LEGS:** No legs

**APPEARANCE:** Natural red oak

**NOTE:** Other optional locking methods also available



Single tier,  
1 wide  
Shown with  
optional finished  
end panels



Double tier,  
1 wide  
Shown with  
optional finished  
end panels, base  
and crown molding



Triple tier,  
1 wide  
Shown with  
optional finished  
end panels



Available optional decorative crown  
molding and base in red oak finish



Concealed european style cabinet  
door hinges



Key locks are standard


# IDEAL FOR COUNTRY CLUBS, HEALTH SPAS AND FITNESS CENTERS

# Hallowell®

WOOD WARDROBE LOCKERS



Single tier, 3 wide, 3 openings  
Shown with optional finished end panels,  
base and decorative crown molding

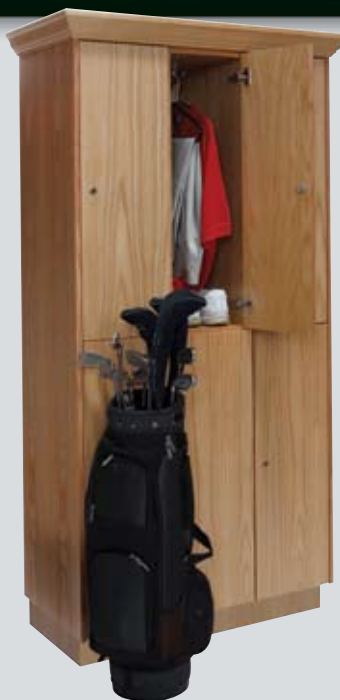


Double tier, 3 wide, 6 openings  
Shown with optional finished end panels,  
base and decorative crown molding



Triple tier, 3 wide, 9 openings  
Shown with optional finished end panels,  
base and decorative crown molding

| Width              | Depth | Opening Height | Frame Height | Tier | Grouping | Openings Per Group | Fully-Assembled Catalog No. | Color Selection |
|--------------------|-------|----------------|--------------|------|----------|--------------------|-----------------------------|-----------------|
| <b>SINGLE TIER</b> |       |                |              |      |          |                    |                             |                 |
| 12                 | 18    | 72             | 72           | 1    | 1-wide   | 1                  | UW1282-1A-W                 | Red Oak         |
| 12                 | 18    | 72             | 72           | 1    | 3-wide   | 3                  | UW3282-1A-W                 | Red Oak         |
| 15                 | 18    | 72             | 72           | 1    | 1-wide   | 1                  | UW1582-1A-W                 | Red Oak         |
| 15                 | 18    | 72             | 72           | 1    | 3-wide   | 3                  | UW3582-1A-W                 | Red Oak         |
| <b>DOUBLE TIER</b> |       |                |              |      |          |                    |                             |                 |
| 12                 | 18    | 36             | 72           | 2    | 1-wide   | 2                  | UW1282-2A-W                 | Red Oak         |
| 12                 | 18    | 36             | 72           | 2    | 3-wide   | 6                  | UW3282-2A-W                 | Red Oak         |
| 15                 | 18    | 36             | 72           | 2    | 1-wide   | 2                  | UW1582-2A-W                 | Red Oak         |
| 15                 | 18    | 36             | 72           | 2    | 3-wide   | 6                  | UW3582-2A-W                 | Red Oak         |
| <b>TRIPLE TIER</b> |       |                |              |      |          |                    |                             |                 |
| 12                 | 18    | 24             | 72           | 3    | 1-wide   | 3                  | UW1282-3A-W                 | Red Oak         |
| 12                 | 18    | 24             | 72           | 3    | 3-wide   | 9                  | UW3282-3A-W                 | Red Oak         |
| 15                 | 18    | 24             | 72           | 3    | 1-wide   | 3                  | UW1582-3A-W                 | Red Oak         |
| 15                 | 18    | 24             | 72           | 3    | 3-wide   | 9                  | UW3582-3A-W                 | Red Oak         |

| Accessories                                   |       |        | Catalog No. | Color Selection |
|---|-------|--------|-------------|-----------------|
| Width   | Depth | Height |             |                 |
| BASE  |       |        |             |                 |
| 12  | 18    | 4      | WCB128W     | Red Oak         |
| 36  | 18    | 4      | WCB328W     | Red Oak         |
| 15  | 18    | 4      | WCB158W     | Red Oak         |
| 45  | 18    | 4      | WCB358W     | Red Oak         |
| FINISHED END BASE                             |       |        |             |                 |
| 18  | 4     |        | WCEB18W     | Red Oak         |
| FINISHED END PANEL (required at exposed ends) |       |        |             |                 |
| 3/4   | 18    | 72     | WEP1872W    | Red Oak         |
| FRONT CROWN MOLDING                           |       |        |             |                 |
| 12  |       | 4      | WCM12W      | Red Oak         |
| 15  |       | 4      | WCM15W      | Red Oak         |
| 36  |       | 4      | WCM36W      | Red Oak         |
| 45  |       | 4      | WCM45W      | Red Oak         |
| END CROWN MOLDING                             |       |        |             |                 |
| 18  | 4     |        | WCME18W     | Red Oak         |

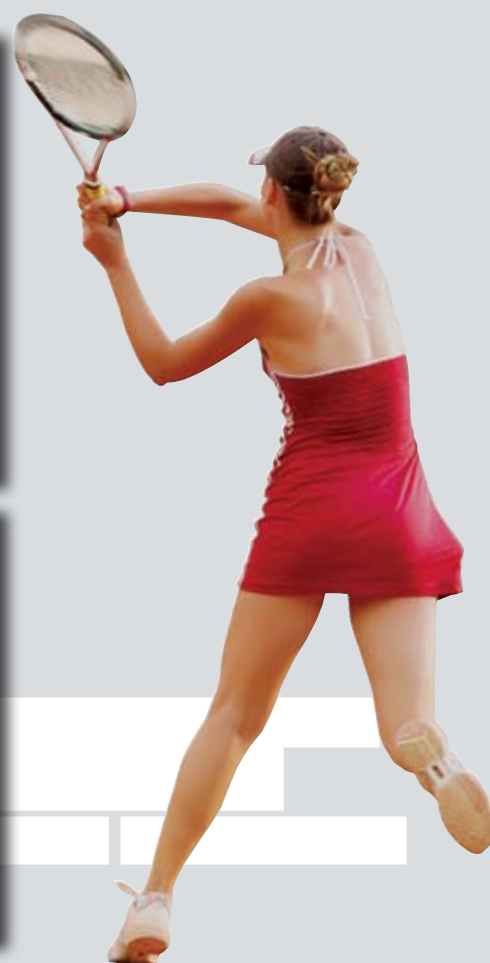

5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS

**STOCK** → **PROGRAM**

**THE FASTEST SHIPPING IN THE INDUSTRY...**

## **RECRUITER CUSTOM WOOD LOCKERS WILL CREATE A UNIQUE ENVIRONMENT**

# **RECRUITER**<sup>TM</sup>

### *In-Stock Wood Sport Lockers*

**Recruiter lockers are made in our North Florida manufacturing facility. This guarantees you absolute quality control and on-time delivery.**

Recruiter lockers are crafted of furniture grade red oak and finished using three coats of high grade cabinet lacquer. Red oak is naturally moisture and mildew resistant so you can be sure to benefit from your investment for years to come. Recruiter lockers are virtually unaffected by normal locker room conditions and are designed to stand up to daily use by today's athletes!

In addition to our standard stock designs and sizes, our engineers are readily available to assist you in custom designing a locker to meet your specific needs. Be it a fitness center, team locker room, country club or resort health spa, we stand behind our product with a full one year warranty that covers defects in materials and workmanship.

- *All lockers ship fully-assembled*
- *Fabricated from furniture grade red oak*
- *Strong, durable and long-lasting*
- *Excellent moisture resistance*
- *Upper security box door includes built-in combination lock*
- *Optional team engraved logo on security box door*
- *Lower foot locker/seat allows for storage of bulk items*
- *Chrome plated coat rod*
- *Shoulder pad storage*
- *3-coat lacquer finish*
- *Custom designs are also available (non-stock)*
- *Custom wood species available (non-stock)*



### **THE BEAUTY IS IN THE DETAILS...**

These lockers are high quality fine furniture. We take special pride in ensuring that each locker is a true work of art. All are made in our own manufacturing plant and shipped directly to you.



# Hallowell®

WOOD SPORT LOCKERS

## FEATURES:

**BODY CONSTRUCTION:** Wood lockers shall be fabricated from  $\frac{3}{4}$ " plain sliced red oak plywood throughout including sides, backs and hat shelves.

**BODY STYLES:** Single tier

**SIZES:** 24" wide x 24" deep x 84" high

30" wide x 24" deep x 84" high

**FINISH:** All locker parts to be finished with a three coat catalyzed clear cabinet lacquer

**TRIM:** Face trim, shelf valances, seat front nosing, seat hinge support blocking and seat side support cleats are made from red oak lumber

**SECURITY BOX DOOR:** Made from red oak lumber

**HINGES:** Continuous in bright brass plating

**HOOKS:** Two double prong metal hooks

**CLOTHES ROD:** Made from KV 1-1/16" diameter chrome plated steel, 075" wall thickness

**UPPER SHELF:** Covered with Wilson-Art 7888-60 Golden Oak plastic laminate for durability

**APPEARANCE:** Color: Natural red oak

**WARRANTY:** 1 year



| Width | Depth | Height | Catalog Number |
|-------|-------|--------|----------------|
| 24    | 24    | 84     | RL242484-1SB   |
| 30    | 24    | 84     | RL302484-1SB   |

5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS

STOCK → PROGRAM

THE FASTEST SHIPPING IN THE INDUSTRY...



# DuraTech™

## Solid Plastic Lockers

**RUST PROOF!**

 PERFECT FOR APPLICATIONS  
WHERE HIGH HUMIDITY,  
MOISTURE AND WATER  
ARE PRESENT

**SOLID PLASTIC LOCKERS ARE PERFECT FOR USE IN WET ENVIRONMENTS SUCH AS SHOWERS, POOLS AND THE OUTDOORS.**

Plastic lockers are fabricated from solid high density polyethylene panels (HDPE) for maximum strength and durability while providing corrosion resistance to most common chemicals.


 Six Tier,  
3 wide,  
18 openings

 Single Tier,  
3 wide,  
3 openings

 Six Tier,  
1 wide,  
6 openings

**COLOR  
SELECTION**

GLACIER GRAY

OR

GLACIER  
GRAY BODYBLUE  
DOORS

# SOLID PLASTIC LOCKERS ARE THE SOLUTION IN WET ENVIRONMENTS

# Hallowell®

SOLID PLASTIC (HDPE) LOCKERS

## FEATURES:

**BODY CONSTRUCTION:** Corrosion Proof High Density Polyethylene (HDPE), 1/2" thick frame with 3/8" thick body panels

**BODY STYLES:** Single, double, triple and six tier

**DOOR (wardrobe & box):** Horizontal slots in door face provide ventilation.

**HINGES:** Continuous powder coated aluminum hinge

**HANDLE (wardrobe):** Projecting solid plastic handle with continuous full-height lift-type latching

**HANDLE (box):** Single-point thru-the-door projecting friction catch door pull with padlock hasp

**SHELVES:** Hat shelf is included in single tier lockers.

**HOOKS:** One double ceiling hook is included in single and double tier lockers.



Triple Tier,  
3 wide,  
9 openings shown  
with optional 4" base

## ADVANTAGES:

- Scratch Resistant
- Impact and dent resistant
- Easy to clean
- Mildew and odor resistant
- Graffiti resistant (pencil, pen, paint and most common markers)

| Width              | Depth | Opening Hgt | Frm Hgt | Tier | Grouping | Openings Per Group | Fully-Assembled Cat No. | Color Selection |
|--------------------|-------|-------------|---------|------|----------|--------------------|-------------------------|-----------------|
| <b>SINGLE TIER</b> |       |             |         |      |          |                    |                         |                 |
| 12                 | 18    | 60          | 60      | 1    | 1-wide   | 1                  | HPL1280-1A              | GG, GB          |
| 12                 | 18    | 60          | 60      | 1    | 3-wide   | 3                  | HPL3280-1A              | GG, GB          |
| 15                 | 18    | 60          | 60      | 1    | 1-wide   | 1                  | HPL1580-1A              | GG, GB          |
| 15                 | 18    | 60          | 60      | 1    | 3-wide   | 3                  | HPL3580-1A              | GG, GB          |
| 12                 | 18    | 72          | 72      | 1    | 1-wide   | 1                  | HPL1282-1A              | GG, GB          |
| 12                 | 18    | 72          | 72      | 1    | 3-wide   | 3                  | HPL3282-1A              | GG, GB          |
| 15                 | 18    | 72          | 72      | 1    | 1-wide   | 1                  | HPL1582-1A              | GG, GB          |
| 15                 | 18    | 72          | 72      | 1    | 3-wide   | 3                  | HPL3582-1A              | GG, GB          |
| 18                 | 18    | 72          | 72      | 1    | 1-wide   | 1                  | HPL1882-1A              | GG, GB          |
| 18                 | 18    | 72          | 72      | 1    | 3-wide   | 3                  | HPL3882-1A              | GG, GB          |
| <b>DOUBLE TIER</b> |       |             |         |      |          |                    |                         |                 |
| 12                 | 18    | 36          | 72      | 2    | 1-wide   | 2                  | HPL1282-2A              | GG, GB          |
| 12                 | 18    | 36          | 72      | 2    | 3-wide   | 6                  | HPL3282-2A              | GG, GB          |
| 15                 | 18    | 36          | 72      | 2    | 1-wide   | 2                  | HPL1582-2A              | GG, GB          |
| 15                 | 18    | 36          | 72      | 2    | 3-wide   | 6                  | HPL3582-2A              | GG, GB          |
| <b>TRIPLE TIER</b> |       |             |         |      |          |                    |                         |                 |
| 12                 | 18    | 24          | 72      | 3    | 1-wide   | 3                  | HPL1282-3A              | GG, GB          |
| 12                 | 18    | 24          | 72      | 3    | 3-wide   | 9                  | HPL3282-3A              | GG, GB          |
| <b>SIX TIERS</b>   |       |             |         |      |          |                    |                         |                 |
| 12                 | 18    | 12          | 72      | 6    | 1-wide   | 6                  | HPL1282-6A              | GG, GB          |
| 12                 | 18    | 12          | 72      | 6    | 3-wide   | 18                 | HPL3282-6A              | GG, GB          |



Optional slope tops prevent items from being placed on locker tops.

| Width             | Depth | Frm Hgt | Grouping | Cat No.   | Color |
|-------------------|-------|---------|----------|-----------|-------|
| <b>BASES</b>      |       |         |          |           |       |
| 12                | 18    | 4       | 1-wide   | HPLCB1218 | BK    |
| 15                | 18    | 4       | 1-wide   | HPLCB1518 | BK    |
| 18                | 18    | 4       | 1-wide   | HPLCB1818 | BK    |
| 36                | 18    | 4       | 3-wide   | HPLCB3618 | BK    |
| 45                | 18    | 4       | 3-wide   | HPLCB4518 | BK    |
| 54                | 18    | 4       | 3-wide   | HPLCB5418 | BK    |
| <b>SLOPE TOPS</b> |       |         |          |           |       |
| 12                | 18    | 6       | 1-wide   | HPLST1218 | GG    |
| 15                | 18    | 6       | 1-wide   | HPLST1518 | GG    |
| 18                | 18    | 6       | 1-wide   | HPLST1818 | GG    |
| 36                | 18    | 6       | 3-wide   | HPLST3618 | GG    |
| 45                | 18    | 6       | 3-wide   | HPLST4518 | GG    |
| 54                | 18    | 6       | 3-wide   | HPLST5418 | GG    |

5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS

STOCK → PROGRAM

THE FASTEST SHIPPING IN THE INDUSTRY...

MADE FOR THE  
FOOD INDUSTRY

DuraTech™

Solid Plastic Food Industry Lockers

Single Tier,  
1 wide,  
1 openingSingle Tier,  
3 wide,  
3 openings**FEATURES:****BODY CONSTRUCTION:** Corrosion Proof High Density Polyethylene (HDPE), 1/2" thick doors and frame with 3/8" thick body panels**BODY STYLES:** Single tier**DOOR:** Transparent blue polycarbonate doors for viewing contents. Includes ventilated door slots**HINGES:** Continuous, powder coated, aluminum hinge**HANDLE:** Projecting solid plastic handle with continuous full-height lift-type latching**SHELVES:** Hat shelf is included**HOOKS:** One double ceiling hook is included**LEGS:** 16" high legs/base are standard

**Lockers can be  
hosed down  
insuring maximum  
cleanliness and  
sanitation.**

**16" high legs/base  
allows for easy  
cleaning beneath  
lockers**

COLOR  
SELECTIONGLACIER  
GRAY BODYBLUE  
DOORS

| Width | Depth | Opg Hgt | Frm Hgt | Tier | Grouping | Openings<br>Per Group | Fully-Assembled<br>Cat No. | Color<br>Selection |
|-------|-------|---------|---------|------|----------|-----------------------|----------------------------|--------------------|
| 12    | 18    | 60      | 76      | 1    | 1-wide   | 1                     | HPFL1280-1A                | GGC                |
| 12    | 18    | 60      | 76      | 1    | 3-wide   | 3                     | HPFL3280-1A                | GGC                |
| 15    | 18    | 60      | 76      | 1    | 1-wide   | 1                     | HPFL1580-1A                | GGC                |
| 15    | 18    | 60      | 76      | 1    | 3-wide   | 3                     | HPFL3580-1A                | GGC                |

**THE ABILITY TO CUSTOM  
CONFIGURE YOUR  
EXACT LOCKER NEEDS**



**Hallowell**

MODULAR SOLID PLASTIC LOCKERS

**DuraTech™**

**SpaceCube™**

**Solid Plastic  
Modular Lockers**

**FEATURES:**

- Can be attached side-by-side, back-to-back or stacked
- Rust proof
- High Density Polyethylene (HDPE) construction
- Great for use outdoors and in high humidity areas
- Color: Glacier Gray throughout



**Place side-by-side or stack to form a row or column of lockers  
to custom design your own locker layout.**

**Space Cube Lockers are engineered to easily attach to each other  
creating a strong and lasting locker unit to meet any need.**

| Width | Depth | Opg Hgt | Frm Hgt | Tier | Grouping | Openings<br>Per group | Fully-Assembled<br>Cat No. | Color<br>Selection |
|-------|-------|---------|---------|------|----------|-----------------------|----------------------------|--------------------|
| 12    | 18    | 12      | 12      | 1    | 1-wide   | 1                     | HSC1282-1A                 | GG                 |

**UNLIMITED USES!**



- ✓ Dorm Rooms
- ✓ Kids Rooms
- ✓ Recreational Rooms
- ✓ Offices
- ✓ Garages
- ✓ Storage Facilities
- ✓ Day Care Centers
- ✓ Patios
- ✓ Churches
- ✓ Stores
- ✓ Schools



**5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS**

**39**

STOCK → PROGRAM

THE FASTEST SHIPPING IN THE INDUSTRY...



# ALL-WELDED HEAVY-DUTY CORROSION RESISTANT

# MAXVIEW™

## All-Welded Lockers

Hallowell All-Welded MaxView lockers are perfect for tool, equipment and gear storage.

### FEATURES:

**BODY CONSTRUCTION:** All-welded 16 gauge heavy-duty tubular frame construction from galvanized sheet steel, sides and back are 1/2" 13 gauge flattened expanded metal.

Top and bottom are heavy-duty galvanized corrosion resistant sheet steel, fully-assembled

**BODY STYLES:** Single tier

**DOOR:** 14 gauge door is diamond perforated for maximum visibility and ventilation.

Includes a welded-in full height door stiffener


**HINGES:** Heavy-duty 13 gauge 7-knuckle (3 hinges per door)

**HANDLE:** Single-point projecting friction catch door pull prepared for both padlock or built-in lock.

**SHELVES:** Four 16 gauge sheet steel welded-in fixed shelves are fabricated from galvanized corrosion resistant sheet steel add additional rigidity to the unit.



- ✓ All-welded heavy-duty construction
- ✓ 4 sided viewing of locker contents
- ✓ 4 sided ventilation
- ✓ Corrosion resistant
- ✓ Lifetime warranty
- ✓ Full height 3-1/2" wide door stiffener



Heavy gauge tubular frame. Bottom shelf of locker sits a full 2-3/4" above finished floor protecting locker contents from water damage.



COLOR  
SELECTION

736  
SPORT SILVER  
(SS)

| Width           | Depth | Opening Height | Frame Height | Tier | Grouping | Openings Per Group | Fully-Assembled Cat No. | Color Selection |
|-----------------|-------|----------------|--------------|------|----------|--------------------|-------------------------|-----------------|
| <b>ONE TIER</b> |       |                |              |      |          |                    |                         |                 |
| 18-3/4          | 18    | 72             | 74-3/4       | 1    | 1-wide   | 1                  | HLV882-1SS              | SS              |

**THE INDUSTRY'S  
TOUGHEST LOCKER**



**Hallowell**

SINGLE-POINT VENTILATED LOCKERS

# SINGLE POINT Welded Single-Point Ventilated Lockers

## FEATURES:

**BODY CONSTRUCTION:** All-welded, fully-assembled

**BODY STYLES:** Single and double tier

**CUSTOM FEATURES:** 16 gauge continuous top for added rigidity, 11 gauge MIG welded latch, continuous door strike at hinge and latch side

**DOOR:** 14 gauge door is diamond perforated for added visibility and ventilation and includes a welded-in full height door stiffener

**HINGES:** Continuous piano type

**HANDLE** Deep-drawn seamless stainless steel recessed handle with single-point thru-the-handle maintenance-free quiet latching system

**SHELVES:** Hat shelf for single tier



Lockers include a 3" wide 18 gauge full height door stiffener spot welded to the inner door face and MIG welded to the hinge side as well as to the top and bottom door flanges providing a rigid torque-free door.



Single-point maintenance-free quiet latching system with recessed handle



Single Tier,  
1 wide,  
1 opening

Single Tier,  
3 wide,  
3 openings

Double Tier,  
3 wide,  
6 openings



| Width              | Depth | Opening Height | Frame Height | Tier | Grouping | Openings Per Group | Fully-Assembled Cat No. | Color Selection |
|--------------------|-------|----------------|--------------|------|----------|--------------------|-------------------------|-----------------|
| <b>SINGLE TIER</b> |       |                |              |      |          |                    |                         |                 |
| 12                 | 12    | 72             | 72           | 1    | 1-wide   | 1                  | HWBA212-1               | HG              |
| 12                 | 12    | 72             | 72           | 1    | 3-wide   | 3                  | HWBA212-111             | HG              |
| 12                 | 18    | 72             | 72           | 1    | 1-wide   | 1                  | HWBA282-1               | HG              |
| 12                 | 18    | 72             | 72           | 1    | 3-wide   | 3                  | HWBA282-111             | HG              |
| 18                 | 18    | 72             | 72           | 1    | 1-wide   | 1                  | HWBA882-1               | HG              |
| 18                 | 18    | 72             | 72           | 1    | 3-wide   | 3                  | HWBA882-111             | HG              |
| <b>DOUBLE TIER</b> |       |                |              |      |          |                    |                         |                 |
| 12                 | 12    | 36             | 72           | 2    | 1-wide   | 2                  | HWBA212-2               | HG              |
| 12                 | 12    | 36             | 72           | 2    | 3-wide   | 6                  | HWBA212-222             | HG              |
| 12                 | 18    | 36             | 72           | 2    | 1-wide   | 2                  | HWBA282-2               | HG              |
| 12                 | 18    | 36             | 72           | 2    | 3-wide   | 6                  | HWBA282-222             | HG              |
| 18                 | 18    | 36             | 72           | 2    | 1-wide   | 2                  | HWBA882-2               | HG              |
| 18                 | 18    | 36             | 72           | 2    | 3-wide   | 6                  | HWBA882-222             | HG              |



**5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS**

**41**

STOCK → PROGRAM

THE FASTEST SHIPPING IN THE INDUSTRY...



PERFECT FOR SWAT,  
POLICE, FIRE AND,  
ALL EMERGENCY  
RESPONSE TEAMS

# TASK FORCE XP™

## Emergency Response All-welded Extreme Performance Lockers

### FEATURES:

**BODY CONSTRUCTION:** 16 gauge, Unibody all-welded, galvanized corrosion resistant sheet steel.

Back is 18 gauge

**BODY STYLES:** Single tier, custom designed for specialized use

**DOOR:** 14 gauge louvered double doors with full-height welded in stiffener

**HINGES:** Continuous piano type

**HANDLE:** 3-point high-security turn handle latching handle

**HOOKS:** Two single wall hooks in wardrobe area, single hook in opening below security box, single hook on door.

**COAT RODS:** One at vertical wardrobe section

**SHELVES:** Two full-width at top, one partial shelf above security box

**SIZE:** Wardrobe locker

24" x 24" x 72"

Optional base/drawer unit

24" x 36" x 18"




Utility belt hook

Security box

Side pocket,  
for a 1" thick  
clipboardFull height  
piano hingePowder coat  
finishFull height door  
stiffener

Large lockable storage  
drawer/base with  
laminated maple wood  
seat is optional



COLOR  
SELECTION

725 HALLOWELL  
GRAY (HG)

|                 | Width | Depth | Opening<br>Height | Unit<br>Height | Tier | Grouping | Openings<br>Per Group | Fully-Assembled<br>Cat No. | Color<br>Selection |
|-----------------|-------|-------|-------------------|----------------|------|----------|-----------------------|----------------------------|--------------------|
| <b>ONE TIER</b> |       |       |                   |                |      |          |                       |                            |                    |
| Without base    | 24    | 24    | 72                | 72             | 1    | 1-wide   | 1                     | HERL442-1                  | HG                 |
| With base       | 24    | 24/36 | 72                | 90             | 1    | 1-wide   | 1                     | HERL442-1B                 | HG                 |

# DURABLE HIGH PERFORMANCE GEAR LOCKERS



# Hallowell

OPEN-FRONT ALL-WELDED SPORT LOCKERS

## THE Open Gear™ THE PERFECT GEAR LOCKER

**Open-front all-welded lockers are perfect for equipment, gear and tool storage. All lockers ship fully-assembled ready to use.**

**Perfect for all team sports, police, SWAT, riot, fire and other emergency response organizations.**

### FEATURES:

**BODY CONSTRUCTION:** All-welded construction, 16 gauge heavy-duty body and 18 gauge back, Open-front for maximum ventilation and quick access, Sides are diamond perforated for added ventilation and are formed to be integral with the front vertical frame, base is reinforced using two front-to-back channel stiffeners welded to the underside.


**BODY STYLES:** Open front

**HINGES:** Continuous piano type

**HANDLE:** Upper security box includes a finger pull padlock hasp

**COAT ROD:** Full-width 1" O.D. stainless steel coat rod

**NOTES:** All lockers ship fully-assembled ready to use, Number plates (#1-up) are included, Locks are not included. Order with or without foot locker, Foot locker is ideal for storing larger items and doubles as a heavy-duty reinforced seat. The seat lifts up for easy access to contents from the top. Foot locker includes a simple rigid padlock hasp (lock not included)



Security-Box

Stainless steel coat rod

Underside of seat is reinforced to support up to 350 lbs.



**COLOR  
SELECTION**

**736  
SPORT SILVER  
(SS)**

| Width                      | Depth | Opening Height | Frame Height | Tier | Grouping | Openings Per Group | Fully-Assembled Cat No. | Color Selection |
|----------------------------|-------|----------------|--------------|------|----------|--------------------|-------------------------|-----------------|
| <b>WITHOUT FOOT LOCKER</b> |       |                |              |      |          |                    |                         |                 |
| 24                         | 22    | 72             | 72           | 1    | 1-wide   | 1                  | HSBN422-1C              | SS              |
| <b>WITH FOOT LOCKER</b>    |       |                |              |      |          |                    |                         |                 |
| 24                         | 22    | 72             | 72           | 1    | 1-wide   | 1                  | HSBF422-1C              | SS              |

**5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS**

STOCK → PROGRAM

**Quick Ship**

THE FASTEST SHIPPING IN THE INDUSTRY...



# ALL-WELDED MILITARY GEAR LOCKERS



Designed to be the solution to all your military gear storage requirements, our TA-50 Equipment Storage Lockers are secure, durable and are guaranteed to last the lifetime of your facility.

## TA-50 FEATURES

**BODY CONSTRUCTION:** All-welded construction, 16 gauge diamond perforated sides, 18 gauge back, 16 gauge top and 16 gauge reinforced bottom.

**DOORS:** 14 gauge diamond perforated doors with 18 gauge full-height door stiffener for both doors is standard.

**HANDLE:** High-security 3-point cremone turn-handle latching

**SHELVES:** 16 gauge upper shelf located 12" down from top, 16 gauge lower shelf located 18" up from bottom


**DOOR HINGES:** 16 gauge continuous piano hinge

**ACCESSORIES:** Stainless steel coat rod and two back hooks located under upper shelf

**WARRANTY:** Lifetime



High-Security 3-point  
Cremone  
turn-handle latching



COLOR  
SELECTION

HALLOWELL GRAY  
(HG)



| Width | Depth | Opening Height | Frame Height | Grouping | Openings Per Group | Fully-Assembled Cat No. | Color Selection |
|-------|-------|----------------|--------------|----------|--------------------|-------------------------|-----------------|
| 42    | 24    | 84             | 84           | 1-wide   | 1                  | TA50-422484-1           | HG              |

# ALL-WELDED HIGH SECURITY LOCKERS

# Hallowell

SECURITYMAX™ ALL-WELDED LOCKERS

## SECURITY MAX™

Hallowell SecurityMax heavy-duty all-welded lockers offer the highest available security by incorporating an extra heavy-duty three point turn-handle locking mechanism and the versatility of adjustable interior shelves. Available in ventilated and solid locker versions.

SecurityMax lockers are ideal where heavy-duty and versatile storage is needed for tools, gear, sports equipment, uniforms and clothing.

### FEATURES:

**BODY CONSTRUCTION:** All-welded construction, 16 gauge heavy-duty body and 18 gauge back, Sides formed to be integral with front vertical frame and are reinforced using two front-to-back channel stiffeners welded to the underside.

**BODY STYLES:** One tier, one wide. Available in solid or ventilated versions

**HINGES:** Continuous piano type


**HANDLE** Cremone 3-point high-security turn handle latching with heavy-duty 3/8" lock rods which engage the top and bottom locker frames while the cam engages the frame at the door jamb near the handle

**DOOR:** 14 gauge door with a full height welded in door stiffener

**SHELVES:** Upper welded hat shelf. Additional shelves can be ordered and are adjustable on 3" centers.

**COAT ROD:** 3/8" diameter rod is welded to underside of upper shelf

**HOOKS:** Two single back hooks



3 point high security turn handle latching



| Width                     | Depth | Opening Height | Frame Height | Tier | Grouping | Openings Group | Fully-Assembled Cat No. | Color Selection |
|---------------------------|-------|----------------|--------------|------|----------|----------------|-------------------------|-----------------|
| <b>VENTILATED MODELS</b>  |       |                |              |      |          |                |                         |                 |
| 18                        | 22    | 72             | 72           | 1    | 1-wide   | 1              | HTA822AS1               | PL              |
| 24                        | 22    | 72             | 72           | 1    | 1-wide   | 1              | HTA422AS1               | PL              |
| <b>SOLID MODELS</b>       |       |                |              |      |          |                |                         |                 |
| 18                        | 22    | 72             | 72           | 1    | 1-wide   | 1              | HTC822AS1               | PL              |
| 24                        | 22    | 72             | 72           | 1    | 1-wide   | 1              | HTC422AS1               | PL              |
| <b>ADDITIONAL SHELVES</b> |       |                |              |      |          |                |                         |                 |
| 18                        | 22    |                |              |      |          |                | HTAS1822                | PL              |
| 24                        | 22    |                |              |      |          |                | HTAS2422                | PL              |

COLOR SELECTION

711 PLATINUM (PL)

5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS

45


STOCK → PROGRAM

THE FASTEST SHIPPING IN THE INDUSTRY...



**Superior® Bulk Storage Lockers**  
are the ideal solution for condos  
and any facility that requires  
additional secure storage.

# BULK STORAGE LOCKERS

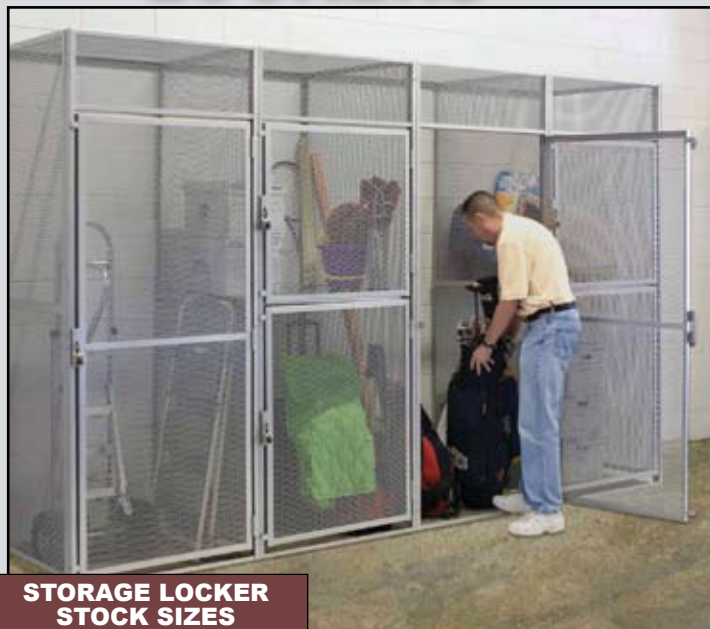

## STORAGE LOCKER STOCK SIZES

Standard Sizes available in single and double tier configurations

|               |       |             |
|---------------|-------|-------------|
| <b>Width</b>  | 3'-0" | 4'-0"       |
| <b>Depths</b> | 3'-0" | 4'-0" 5'-0" |
| <b>Height</b> | 7'-6" |             |

Front Extension Panels are available in 6" wide increments from 6" wide to 48" wide to create oversized width units.

- **Single & double tier models**
- **Economical • Secure • Durable**
- **Fast & Easy Installation**
- **Low life-cycle cost • Attractive**

Hallowell® all steel storage lockers have been designed to provide maximum security and durability. Cost effective and ease of installation make them the perfect choice. The use of Hallowell manufactured lockers creates an esthetically appealing installation that when properly promoted can be a tremendous asset to the building and of great value to the users.



Shown with optional expanded metal top

13" transom

Heavy-duty 13 gauge 7-knuckle 3-1/2" butt hinges

Welded door brace for added rigidity

Welded padlock hasp and ergonomic welded-on door pull

1/2" 16 gauge flattened expanded metal doors and sides

Heavy-gauge vertical frame channels and horizontal frame angles

**SINGLE TIER STARTER UNIT**

**Tops** are recommended for situations where the ceiling height is 8'-6" or more when using standard 7'-6" high component modules.

**Shelves** are used as dividers between top and bottom openings of double tier lockers. May also be used in single tier lockers for additional floor space and may be shorter than depth of locker to provide space for long items.

**Backs** are required for back-to-back installations or where a single row is set away from a wall.


**Bottoms** are recommended for use on all single or double tier lockers if dampness prevails.




## CUSTOM INSTALLATIONS

Hallowell Storage Lockers' unique construction provides for a simple, easy way of handling interference from overhead pipes and/or ducts.

**Repair Angle** 16 gauge 36" long repair angle is pre-punched on 2" centers to "heal" cuts in dividers or transom. Two bolts and clips are included with each angle.



Showing cut out (with repair angles) to allow for interfering duct.



View of pipe through transom (or divider) with repair angle.

**COLOR SELECTION**

**736  
SPORT SILVER  
(SS)**

Custom sizes are also available. Contact our Sales and Marketing Department at 1- [ ] for availability.

**NOTE: In the interest of safety, all Hallowell lockers must be securely anchored to the floor and/or wall.**

**Serving the storage needs of thousands of residential, commercial and institutional buildings throughout the U.S.A. for more than 70 years!**

# Hallowell®

**BULK STORAGE LOCKERS**

## S P E C I F I C A T I O N S

**General:** Lockers shall be Hallowell® Bulk Storage Lockers with all welded components as manufactured by List Industries Inc., 2823 W. Orange Ave., Apopka, FL 32708, Quantities, sizes and arrangements shall be as shown on drawings.

**Locker Fronts:** All doors, whether single or double tier, shall consist of 1/2" 16 gauge flattened expanded metal framed by 1-1/4" x 1-1/4" 12 gauge formed angles. Single tier doors shall have an angle reinforcement across center. Doors shall be pre-hung in frames at the factory, with all hinges, padlock hasps and door strikes securely welded in position. Door frames shall be fabricated from 1-1/2" x 1" 14 gauge formed channels on the sides and 1-1/2" x 1" 14 gauge formed angles at top and bottom. All frames shall be pre-punched for ease of installation. All front assemblies are 1-1/2" deep and shall include a 13" high upper transom above door.

**Vertical Dividers:** Shall be 1/2" 16 gauge flattened expanded metal securely welded to 1-1/8" x 1-1/8" 14 gauge formed angles. Shelf support channels shall be fabricated of 14 gauge steel and be welded to vertical dividers (sides) on inside and outside of intermediate double tier dividers and on inside only of double tier row end dividers as well as on inside of all single tier dividers. All vertical dividers are 1-1/2" less than nominal locker depth to allow for 1-1/2" deep door front assembly.

**Repair Angles:** 16 gauge 36" long repair angle is pre-punched on 2" centers to "heal" cuts in dividers or transom. Two bolts and clips are included with each angle.

**Shelves:** Where required, shall be of 22 gauge galvanized sheet steel with double bends at front and back. Provided as standard for all double tier lockers to separate upper tier from lower tier. Provided in multiple 12" (nominal) deep planks to meet locker depth. Galvanized shelves ship unpainted.

**Backs:** Optional, shall be of 1/2" 16 gauge flattened expanded metal frameless design. Required at back-to-back conditions or where locker backs are away from walls.

**Bottoms (optional):** Where required, shall be of 22 gauge galvanized sheet steel with double bend at front and back. Galvanized bottoms ship unpainted. Provided in multiple 12" (nominal) deep planks to meet locker depth.

**Tops (optional):** Shall be of 1/2" 16 gauge flattened expanded metal with a 16 gauge angle welded at rear. Include mounting clips and bolts. Recommended where ceiling height is 12" or more above locker height.

**Finish:** All fronts, vertical dividers, backs and tops shall include powder coat finish in #736 Sport Silver. Shelves and/or bottoms shall be galvanized sheet steel, unpainted.

**Installation:** Vertical dividers and door frames shall be securely anchored to wall and/or floor with an anchoring system selected by the installer. All door frames, tops and backs shall be fastened together using 1/4" x 3/4" cadmium plated bolts and nuts, to be provided by installer.

| STARTER UNITS                        |    |    |                       |            | ADDER UNITS   |            |
|--------------------------------------|----|----|-----------------------|------------|---|------------|
| W                                    | D  | H  | Sport Silver Part No. | Wt. (lbs.) | Sport Silver Part No.   | Wt. (lbs.) |
| SINGLE TIER                          |    |    |                       |            |   |            |
| 36                                   | 36 | 90 | BSL363690-1S-SS       | 119        | BSL363690-1A-SS   | 88         |
| 36                                   | 48 | 90 | BSL364890-1S-SS       | 133        | BSL364890-1A-SS   | 98         |
| 36                                   | 60 | 90 | BSL366090-1S-SS       | 145        | BSL366090-1A-SS   | 102        |
| 48                                   | 36 | 90 | BSL483690-1S-SS       | 129        | BSL483690-1A-SS   | 98         |
| 48                                   | 48 | 90 | BSL484890-1S-SS       | 143        | BSL484890-1A-SS   | 105        |
| 48                                   | 60 | 90 | BSL486090-1S-SS       | 157        | BSL486090-1A-SS   | 112        |
| DOUBLE TIER                          |    |    |                       |            |   |            |
| 36                                   | 36 | 45 | BSL363690-2S-SS       | 127        | BSL363690-2A-SS   | 105        |
| 36                                   | 48 | 45 | BSL364890-2S-SS       | 155        | BSL364890-2A-SS   | 116        |
| 36                                   | 60 | 45 | BSL366090-2S-SS       | 178        | BSL366090-2A-SS   | 127        |
| 48                                   | 36 | 45 | BSL483690-2S-SS       | 137        | BSL483690-2A-SS   | 115        |
| 48                                   | 48 | 45 | BSL484890-2S-SS       | 165        | BSL484890-2A-SS   | 126        |
| 48                                   | 60 | 45 | BSL486090-2S-SS       | 188        | BSL486090-2A-SS   | 137        |
| ACCESSORIES FOR BULK STORAGE LOCKERS |    |    |                       |            |   |            |
| TOP PANELS                           |    |    |                       |            |   |            |
| 36                                   | 36 |    | 4803636SS             | 9          | • Units available right-hand or left-hand hinged<br><br>• Single Tier:<br>Overall Height 90"<br>Opening Height: 75-1/2" |            |
| 36                                   | 48 |    | 4803648SS             | 10         |   |            |
| 36                                   | 60 |    | 4803660SS             | 11         |   |            |
| 48                                   | 36 |    | 4804836SS             | 12         |   |            |
| 48                                   | 48 |    | 4804848SS             | 13         |   |            |
| 48                                   | 60 |    | 4804860SS             | 14         | • Double Tier:<br>Overall Height 90"<br>Upper Opening Height: 31-1/2"<br>Lower Opening Height: 42"                      |            |
| FRONT EXTENSION PANELS               |    |    |                       |            |   |            |
| 6                                    | 90 |    | 4600690SS             | 20         |   |            |
| 12                                   | 90 |    | 4601290SS             | 23         |   |            |
| 18                                   | 90 |    | 4601890SS             | 26         |   |            |
| 24                                   | 90 |    | 4602490SS             | 29         |   |            |
| BACK PANELS                          |    |    |                       |            |   |            |
| 36                                   | 90 |    | 4703690SS             | 30         | <b>Custom sizes are also available.</b><br>Contact our Sales and Marketing Department for more information.             |            |
| 48                                   | 90 |    | 4704890SS             | 38         |   |            |
| REPAIR ANGLES                        |    |    |                       |            |   |            |
| 36                                   |    |    | 20100                 | 3          |   |            |



The Heavy-Duty 7 knuckle hinges and door stops are welded to the frame for extra strength and security of contents, imparting a more finished and attractive appearance to the unit.



Optional 16 gauge 1/2" expanded metal top makes for a very secure structure adding rigidity and ensuring a higher level of protection from theft



Door handles are formed from one solid piece of steel and are welded to the frame for extra strength.

**COLOR SELECTION**

**736 SPORT SILVER (SS)**

**5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS**

**47**

STOCK → PROGRAM

THE FASTEST SHIPPING IN THE INDUSTRY...



# THE PERFECT TRAFFIC CONTAINMENT SOLUTION

## Security • Traffic Control • Portability

- In Stock for shipment within 5 days of receipt of order
- Quick and easy installation. Install between two walls instantly without anchors to walls or floor
- Simplified, patented pressure lock system
- Floor anchors are not required but are available for special installations
- Compact, fold-up size and heavy duty swivel casters make moving and storage easy
- Plated finish
- Padlock hasp is standard
- Cylinder locks are available for additional security
- Two or more gates can be joined together for large expanse

### Here's how the exclusive Superior® Pressure Lock System works:

1. Raise unit retainer channel to vertical position and secure
2. Extend gate until rubber bumpers touch both walls
3. Lower the male lock channel (with pin) until it rests on carriage channels within guides and locking bracket.
4. Lower female lock channel (with adjustment holes) until it rests within the male lock channel with pin.  
Pin need not engage a hole in female lock channel.
5. Raise both channels until pin engages the hole immediately to the right. Applying moderate pressure, push both channels down until they rest within guides and locking bracket. Lock in position.

### Superior® Portable Gates are ideal for:

---

**Schools**


---



---

**Shopping Malls**


---



---

**Recreation Centers**


---



---

**Factories**


---



---

**Libraries**


---



---

**Hospitals**


---



---

**Office Buildings**


---



---

**Financial Institutions**


---



---

**Theaters**


---



---

**Museums**


---



**Five sizes to accommodate 3'-6" wide to 18'-0" wide conditions.  
Connect multiple gates together for wider applications.**

| Model   | For Openings       | Collapsed Size | Height    | Weight (lbs) |
|---------|--------------------|----------------|-----------|--------------|
| P601-06 | 3'-6" to 6'-0"     | 19" x 30"      | 6'-6-1/2" | 193          |
| P601-09 | 6'-0" to 9'-0"     | 19" x 30"      | 6'-6-1/2" | 197          |
| P601-12 | 7'-0" to 12'-0"    | 24" x 30"      | 6'-6-1/2" | 254          |
| P601-15 | 11'-0" to 15'-0"   | 30" x 30"      | 6'-6-1/2" | 311          |
| P601-18 | 13'-0" to 18'-0"   | 30" x 30"      | 6'-6-1/2" | 374          |
| PG-CL   | Cylinder Locks     |                |           |              |
| PG-FAA  | Floor Anchors      |                |           |              |
| PG-A    | Additional Anchors |                |           |              |

**COLOR  
SELECTION**
**PLATED  
FINISH**

**FUNCTIONAL  
DURABLE  
ADAPTABLE**



**Hallowell**

800 SERIES HEAVY-GAUGE KD CABINETS


# 800 SERIES Heavy-Gauge KD Cabinets

Gives maximum protection to tools, dies, delicate instruments, supplies, and personal belongings. Neat and attractive in appearance. Designed to meet government requirements.

## FEATURES:

- Cabinet is fabricated from heavy gauge steel for appearance and durability.
- All metal parts are precision engineered. No bolt heads show in front or on side panels.
- Positive three-point locking (top, center and bottom) and theft resistant hinges for security.
- Chrome-plated locking handle has built-in grooved key cylinder lock.
- Shelves easily adjust up or down in 2" increments. Triple flanged front for added strength (300 lb. capacity).
- Doors swing out quietly a full 180° and are "HAT" section reinforced.
- Corner Foot Gussets provide added rigidity and stability

**All-welded door frame assembly assures even closure all the way around. Doors are factory assembled in frame to insure accurate fit.**



**Includes full-height door stiffener. Doors swing a full 180°.**



**STORAGE Model 815**




**WARDROBE Model 835**



**COMBINATION Model 855**

| Width   | Depth | Height | Knock-Down Cat. No. | Fully-Assembled Cat. No. | Color Selection |
|---|-------|--------|---------------------|--------------------------|-----------------|
| <b>Storage Cabinets</b>   |       |        |                     |                          |                 |
| 36  | 18    | 78     | 815-S-18            | 815-S-18A                | PT              |
| 36  | 24    | 78     | 815-S-24            | 815-S-24A                | PT              |
| <b>Wardrobe Cabinets</b>  |       |        |                     |                          |                 |
| 36  | 18    | 78     | 835-W-18            | 835-W-18A                | PT              |
| 36  | 24    | 78     | 835-W-24            | 835-W-24A                | PT              |
| <b>Combination Cabinets</b>   |       |        |                     |                          |                 |
| 36  | 18    | 78     | 855-C-18            | 855-C-18A                | PT              |
| 36  | 24    | 78     | 855-C-24            | 855-C-24A                | PT              |
| <b>Storage Cabinet Conversion Kit</b>   |       |        |                     |                          |                 |
| 36  | 18    |        | S-3618              | -----                    | PT              |
| 36  | 24    |        | S-3624              | -----                    | PT              |
| <b>Wardrobe Cabinet Conversion Kit</b>  |       |        |                     |                          |                 |
| 36  |       |        | W-36                |                          |                 |
| <b>Combination Cabinet Conversion Kit</b>   |       |        |                     |                          |                 |
| 36  | 18    |        | C-3618              |                          |                 |
| 36  | 24    |        | C-3624              |                          |                 |
| Combination Cabinet Conversion Kit<br>(Includes 1 center partition and 3 half width shelves, 1 half width coat rod) |       |        |                     |                          |                 |



**STORAGE  
CABINET KIT**



**COMBINATION  
CABINET KIT**

**WARDROBE CABINET KIT**



**COLOR  
SELECTION**

**729  
PARCHMENT (PT)**

**5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS**

STOCK → PROGRAM

THE FASTEST SHIPPING IN THE INDUSTRY...



# FOR REALLY TOUGH INDUSTRIAL APPLICATIONS

# DURATOUGH™

## Classic and Galvanite™ Series All-Welded Cabinets

*Hallowell DuraTough all-welded cabinets are designed to withstand the toughest industrial applications.*

Our all-welded cabinets are available in **Heavy-Duty** and **Extra Heavy-Duty** models for both our Classic and Galvanite corrosion resistant series.

**Classic Series** cabinets are fabricated from prime grade cold rolled sheet steel.

**Galvanite Series** cabinets are fabricated from galvanized sheet steel which has a zinc-iron alloy coating that is applied at the mill providing protection against high-humidity and moist environments. This coating also prevents corrosion from spreading when the paint and/or coating is scratched away.

**Heavy-Duty cabinets** are fabricated from 16 gauge sheet steel and are fully-welded creating a rigid, durable unit.

**Extra Heavy-Duty cabinets** are fabricated from 14 gauge steel which is 25% thicker than 16 gauge providing MAXIMUM durability.



### Standard Features for all DuraTough™ Classic and Galvanite™ Series Cabinets

- All-welded construction
- Double door design
- Solid doors are reinforced with an 18 gauge full-height door stiffener providing a rigid torque-free door.
- 3-point turn handle locking using 3/8" diameter locking rods operated by a 3/16" gauge steel handle. Handle is painted to match cabinet.
- Heavy-duty 13 gauge 7-knuckle 3-1/2" butt hinges welded to door and securely riveted to frame.
- Solid sides are formed to be integral with vertical door frame.
- Top is formed to be integral with horizontal top door frame.
- Bottom is formed to be integral with horizontal bottom door frame and includes double return bends at all four sides maximizing unit rigidity.

- Back is welded to cabinet top, bottom and sides
- Shelves are formed to provide maximum capacity and are adjustable on 3" centers. Shelves bolt to shelf support channels which are welded to sides.

- 78" high storage cabinets include 4-adjustable shelves
- 60" high storage cabinets include 3-adjustable shelves
- 42" high storage cabinets include 2-adjustable shelves
- 78" high combination cabinets include one full-width upper shelf, a center partition, 3 partial-width shelves and one partial-width coat rod

- Optional leg kits are available and can be bolted on to all DuraTough cabinets.
- Color: 725 Hallowell Gray

COLOR  
SELECTION

725  
HALLOWELL GRAY  
(HG)

# CLASSIC & GAVANITE SERIES

# Hallowell

DURATOUGH™ ALL-WELDED CABINETS

## DuraTough™ Classic Series

| Catalog Number                                       | Type        | Width (In) | Depth (In) | Height (In) | No. of Shelves |
|--|-------------|------------|------------|-------------|----------------|
| <b>HEAVY-DUTY-16 GAUGE</b>                           |             |            |            |             |                |
| HW6SC6142-2HG  | Storage     | 36         | 21         | 42          | 2              |
| HW6SC6160-3HG  | Storage     | 36         | 21         | 60          | 3              |
| HW6SC6178-4HG  | Storage     | 36         | 21         | 78          | 4              |
| HW6SC6478-4HG  | Storage     | 36         | 24         | 78          | 4              |
| HW6SC8460-3HG  | Storage     | 48         | 24         | 60          | 3              |
| HW6SC8478-4HG  | Storage     | 48         | 24         | 78          | 4              |
| HW6SC0478-4HG  | Storage     | 60         | 24         | 78          | 4              |
| HW6CC6478-4HG  | Combination | 36         | 24         | 78          | 4              |
| HW6CC8478-4HG  | Combination | 48         | 24         | 78          | 4              |
| HW6CC0478-4HG  | Combination | 60         | 24         | 78          | 4              |
| <b>ADDITIONAL SHELVES, HEAVY-DUTY-16 GAUGE</b>       |             |            |            |             |                |
| HW6SCS61HG   | Shelf       | 36         | 21         | ----        | 1              |
| HW6SCS64HG   | Shelf       | 36         | 24         | ----        | 1              |
| HW6SCS84HG   | Shelf       | 48         | 24         | ----        | 1              |
| <b>EXTRA HEAVY-DUTY-14 GAUGE</b>                     |             |            |            |             |                |
| HW4SC6142-2HG  | Storage     | 36         | 21         | 42          | 2              |
| HW4SC6160-3HG  | Storage     | 36         | 21         | 60          | 3              |
| HW4SC6178-4HG  | Storage     | 36         | 21         | 78          | 4              |
| HW4SC6478-4HG  | Storage     | 36         | 24         | 78          | 4              |
| HW4SC8460-3HG  | Storage     | 48         | 24         | 60          | 3              |
| HW4SC8478-4HG  | Storage     | 48         | 24         | 78          | 4              |
| HW4SC0478-4HG  | Storage     | 60         | 24         | 78          | 4              |
| HW4CC6478-4HG  | Combination | 36         | 24         | 78          | 4              |
| HW4CC8478-4HG  | Combination | 48         | 24         | 78          | 4              |
| HW4CC0478-4HG  | Combination | 60         | 24         | 78          | 4              |
| <b>ADDITIONAL SHELVES, EXTRA HEAVY-DUTY-14 GAUGE</b> |             |            |            |             |                |
| HW4SCS61HG   | Shelf       | 36         | 21         | ----        | 1              |
| HW4SCS64HG   | Shelf       | 36         | 24         | ----        | 1              |
| HW4SCS84HG   | Shelf       | 48         | 24         | ----        | 1              |



18-gauge full-height door stiffener provides maximum rigidity to both doors



Heavy-Duty 3/16" thick steel handle with padlock hasp.



1/8" thick latch and 3/8" diameter lock rods insure maximum security



## CORROSION RESISTANT



## DuraTough™ Galvanite Series

| Catalog Number                                       | Type        | Width (In) | Depth (In) | Height (In) | No. of Shelves |
|--|-------------|------------|------------|-------------|----------------|
| <b>HEAVY-DUTY-16 GAUGE</b>                           |             |            |            |             |                |
| HWG6SC6142-2HG                                       | Storage     | 36         | 21         | 42          | 2              |
| HWG6SC6160-3HG                                       | Storage     | 36         | 21         | 60          | 3              |
| HWG6SC6178-4HG                                       | Storage     | 36         | 21         | 78          | 4              |
| HWG6SC6478-4HG                                       | Storage     | 36         | 24         | 78          | 4              |
| HWG6SC8460-3HG                                       | Storage     | 48         | 24         | 60          | 3              |
| HWG6SC8478-4HG                                       | Storage     | 48         | 24         | 78          | 4              |
| HWG6SC0478-4HG                                       | Storage     | 60         | 24         | 78          | 4              |
| HWG6CC6478-4HG                                       | Combination | 36         | 24         | 78          | 4              |
| HWG6CC8478-4HG                                       | Combination | 48         | 24         | 78          | 4              |
| HWG6CC0478-4HG                                       | Combination | 60         | 24         | 78          | 4              |
| <b>ADDITIONAL SHELVES, HEAVY-DUTY-16 GAUGE</b>       |             |            |            |             |                |
| HWG6SCS61HG  | Shelf       | 36         | 21         | ----        | 1              |
| HWG6SCS64HG  | Shelf       | 36         | 24         | ----        | 1              |
| HWG6SCS84HG  | Shelf       | 48         | 24         | ----        | 1              |
| <b>EXTRA HEAVY-DUTY-14 GAUGE</b>                     |             |            |            |             |                |
| HWG4SC6142-2HG                                       | Storage     | 36         | 21         | 42          | 2              |
| HWG4SC6160-3HG                                       | Storage     | 36         | 21         | 60          | 3              |
| HWG4SC6178-4HG                                       | Storage     | 36         | 21         | 78          | 4              |
| HWG4SC6478-4HG                                       | Storage     | 36         | 24         | 78          | 4              |
| HWG4SC8460-3HG                                       | Storage     | 48         | 24         | 60          | 3              |
| HWG4SC8478-4HG                                       | Storage     | 48         | 24         | 78          | 4              |
| HWG4SC0478-4HG                                       | Storage     | 60         | 24         | 78          | 4              |
| HWG4CC6478-4HG                                       | Combination | 36         | 24         | 78          | 4              |
| HWG4CC8478-4HG                                       | Combination | 48         | 24         | 78          | 4              |
| HWG4CC0478-4HG                                       | Combination | 60         | 24         | 78          | 4              |
| <b>ADDITIONAL SHELVES, EXTRA HEAVY-DUTY-14 GAUGE</b> |             |            |            |             |                |
| HWG4SCS61HG  | Shelf       | 36         | 21         | ----        | 1              |
| HWG4SCS64HG  | Shelf       | 36         | 24         | ----        | 1              |
| HWG4SCS84HG  | Shelf       | 48         | 24         | ----        | 1              |

## DuraTough™ Cabinet Leg Kits

| Catalog No  | Type    | Width (In) | Depth (In) | Height (In) | Legs Per Kit |
|-------------|---------|------------|------------|-------------|--------------|
| HW4LK-1G-HG | Leg Kit | 4          | 21         | 4           | 2            |
| HW4LK-4G-HG | Leg Kit | 4          | 24         | 4           | 2            |

Leg kits can be added to any Hallowell DuraTough Cabinet. Legs are fabricated from galvaneal corrosion resistant steel and are easily bolted to cabinet bottom. Includes hardware for field attachment.



COLOR  
SELECTION

725  
HALLOWELL GRAY  
(HG)

5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS

51



**Hi-Tech shelving** is a complete shelving line with the strength needed to handle most industrial applications and versatility for today's modern facilities. Every shelving unit is designed and engineered to meet the highest standards.

A full complement of accessories including full dividers, partial dividers, label holders, swinging doors, post splices for multilevel systems and foot plates are available to complete your system.

**Quick Ship**

**5 DAY SHIPPING  
ON ALL IN-STOCK  
SHELVING**

**Hallowell Hi-Tech®  
Industrial grade  
steel shelving  
continues a tradition of  
quality established  
generations ago.**







# OPEN SHELVING MEDIUM, HEAVY AND EXTRA HEAVY-DUTY



Box beam adjustable shelves



## Open Starter Units Include:

Two beaded front posts, two angle back posts, one pair of back sway braces, two pair of side sway braces and shelves with shelf clips applicable to unit ordered.

## Open Adder Units Include:

One beaded front post, two angle back posts, one pair of back sway braces, one pair of side sway braces and shelves with shelf clips applicable to unit ordered.



## HEAVY DUTY SHELVES

- Tubular welded box beam front and rear for maximum strength
- Exclusive triple bend side flanges for added strength
- Lapped and welded corners
- Top of shelf is punched to accept shelf dividers
- Uses four one piece shelf clips per shelf
- Can be installed together with both Beaded Front and Angle Back Posts as well as T-Posts and H-Posts



## ANGLE BACK POSTS AND T-POSTS

- Roll formed into a unique angle shape for maximum strength
- The long leg is punched on 1-1/2" centers to allow independent shelf adjustment
- Angle Posts can be used in place of Beaded Front Posts if desired

COLOR  
SELECTION

725  
HALLOWELL GRAY  
(HG)

**Hi-Tech specially designed components  
allow for fast and easy assembly.**

# CLOSED SHELVING MEDIUM, HEAVY AND EXTRA HEAVY-DUTY

# Hallowell®

HI-TECH STEEL SHELVING

## Closed Starter Units Include:

Two beaded front posts, two angle back posts, one set of back panels, two sets of side panels and shelves with shelf clips applicable to unit ordered.

## Closed Adder Units Include:

One beaded front post, two angle back posts, one set of back panels, one set of side panels and shelves with shelf clips applicable to unit ordered.



Box beam adjustable shelves



Base strip closes bottom to prevent debris accumulation



Swinging doors allow cabinet-style storage



Shelf dividers for organized storage

## BEADED FRONT POSTS

- Beaded for strength
- Flush to permit straight-in/straight-out shelf installation, shelf changing and shelf loading. No tilting needed
- Get the full use of shelf area
- Punched on 1-1/2" centers to allow positioning of one shelf independent of other shelves



## H-POSTS

- Designed for high-density applications
- More than twice the capacity of standard posts
- Used at front and back
- Used with standard Hi-Tech components



## ONE PIECE SHELF CLIP

- Each shelf requires four of these sturdy and compact clips
- Clips key firmly into post slots to hold shelves securely in place
- Fits Beaded Front, Angle Back Posts and T-Posts
- Provides independent shelf positioning on 1-1/2" centers
- Non-Intrusive clip sits flush with inside edge of front posts



STARTER  
UNIT



ADDER  
UNIT



5 SHELF  
UNIT



6 SHELF  
UNIT



8 SHELF  
UNIT

| W                         | D  | H  |         | 5-Shelf Unit<br>Cat No.       | 6-Shelf Unit<br>Cat No.       | 8-Shelf Unit<br>Cat No.             | Shelf<br>Capacity* |
|---------------------------|----|----|---------|-------------------------------|-------------------------------|-------------------------------------|--------------------|
| <b>Medium-Duty</b>        |    |    |         |                               |                               |                                     |                    |
| 36                        | 12 | 87 | Starter | 4510-12                       | 4511-12                       | 4513-12                             | 500*               |
| 36                        | 12 | 87 | Adder   | A4510-12                      | A4511-12                      | A4513-12                            | 500*               |
| 36                        | 18 | 87 | Starter | 4510-18                       | 4511-18                       | 4513-18                             | 500*               |
| 36                        | 18 | 87 | Adder   | A4510-18                      | A4511-18                      | A4513-18                            | 500*               |
| 36                        | 24 | 87 | Starter | 4510-24                       | 4511-24                       | 4513-24                             | 500*               |
| 36                        | 24 | 87 | Adder   | A4510-24                      | A4511-24                      | A4513-24                            | 500*               |
| 48                        | 12 | 87 | Starter | 4710-12                       | 4711-12                       | 4713-12                             | 375*               |
| 48                        | 12 | 87 | Adder   | A4710-12                      | A4711-12                      | A4713-12                            | 375*               |
| 48                        | 18 | 87 | Starter | 4710-18                       | 4711-18                       | 4713-18                             | 375*               |
| 48                        | 18 | 87 | Adder   | A4710-18                      | A4711-18                      | A4713-18                            | 375*               |
| 48                        | 24 | 87 | Starter | 4710-24                       | 4711-24                       | 4713-24                             | 350*               |
| 48                        | 24 | 87 | Adder   | A4710-24                      | A4711-24                      | A4713-24                            | 350*               |
| <b>Heavy-Duty</b>         |    |    |         |                               |                               |                                     |                    |
| 36                        | 12 | 87 | Starter | 5510-12                       | 5511-12                       | 5513-12                             | 800*               |
| 36                        | 12 | 87 | Adder   | A5510-12                      | A5511-12                      | A5513-12                            | 800*               |
| 36                        | 18 | 87 | Starter | 5510-18                       | 5511-18                       | 5513-18                             | 800*               |
| 36                        | 18 | 87 | Adder   | A5510-18                      | A5511-18                      | A5513-18                            | 800*               |
| 36                        | 24 | 87 | Starter | 5510-24                       | 5511-24                       | 5513-24                             | 800*               |
| 36                        | 24 | 87 | Adder   | A5510-24                      | A5511-24                      | A5513-24                            | 800*               |
| 48                        | 12 | 87 | Starter | 5710-12                       | 5711-12                       | 5713-12                             | 400*               |
| 48                        | 12 | 87 | Adder   | A5710-12                      | A5711-12                      | A5713-12                            | 400*               |
| 48                        | 18 | 87 | Starter | 5710-18                       | 5711-18                       | 5713-18                             | 450*               |
| 48                        | 18 | 87 | Adder   | A5710-18                      | A5711-18                      | A5713-18                            | 450*               |
| 48                        | 24 | 87 | Starter | 5710-24                       | 5711-24                       | 5713-24                             | 500*               |
| 48                        | 24 | 87 | Adder   | A5710-24                      | A5711-24                      | A5713-24                            | 500*               |
| <b>Extra Heavy-Duty</b>   |    |    |         |                               |                               |                                     |                    |
| 36                        | 12 | 87 | Starter | 7510-12                       | 7511-12                       | 7513-12                             | 1100*              |
| 36                        | 12 | 87 | Adder   | A7510-12                      | A7511-12                      | A7513-12                            | 1100*              |
| 36                        | 18 | 87 | Starter | 7510-18                       | 7511-18                       | 7513-18                             | 1200*              |
| 36                        | 18 | 87 | Adder   | A7510-18                      | A7511-18                      | A7513-18                            | 1200*              |
| 36                        | 24 | 87 | Starter | 7510-24                       | 7511-24                       | 7513-24                             | 1250*              |
| 36                        | 24 | 87 | Adder   | A7510-24                      | A7511-24                      | A7513-24                            | 1250*              |
| 48                        | 12 | 87 | Starter | 7710-12                       | 7711-12                       | 7713-12                             | 750*               |
| 48                        | 12 | 87 | Adder   | A7710-12                      | A7711-12                      | A7713-12                            | 750*               |
| 48                        | 18 | 87 | Starter | 7710-18                       | 7711-18                       | 7713-18                             | 900*               |
| 48                        | 18 | 87 | Adder   | A7710-18                      | A7711-18                      | A7713-18                            | 900*               |
| 48                        | 24 | 87 | Starter | 7710-24                       | 7711-24                       | 7713-24                             | 900*               |
| 48                        | 24 | 87 | Adder   | A7710-24                      | A7711-24                      | A7713-24                            | 900*               |
| <b>Additional Shelves</b> |    |    |         | <b>Medium-Duty<br/>Cat No</b> | <b>Heavy-Duty<br/>Cat No.</b> | <b>Extra Heavy-Duty<br/>Cat No.</b> |                    |
| 36                        | 12 |    |         | 5135-3612                     | 5138-3612                     | 5139-3612                           | See Above          |
| 36                        | 18 |    |         | 5135-3618                     | 5138-3618                     | 5139-3618                           | See Above          |
| 36                        | 24 |    |         | 5135-3624                     | 5138-3624                     | 5139-3624                           | See Above          |
| 48                        | 12 |    |         | 5135-4812                     | 5138-4812                     | 5139-4812                           | See Above          |
| 48                        | 18 |    |         | 5135-4818                     | 5138-4818                     | 5139-4818                           | See Above          |
| 48                        | 24 |    |         | 5135-4824                     | 5138-4824                     | 5139-4824                           | See Above          |

\* Shelf capacity based on a factor of 1.65

Color for all components 725 Hallowell Gray. Optional colors are available at a nominal charge, additional lead times apply.

**OPEN UNITS:** Starter units include two beaded front posts, two angle back posts, one pair back sway braces, two pair side sway braces and 5-8 shelves. Adder units include one beaded front post, two angle back posts, one pair back sway braces, one pair side sway braces and 5-8 shelves.

**COLOR  
SELECTION**

725  
HALLOWELL GRAY  
(HG)

# CLOSED SHELVING MEDIUM, HEAVY AND EXTRA HEAVY-DUTY

# Hallowell®

HI-TECH™ SHELVING



STARTER UNIT



ADDER UNIT



5 SHELF UNIT



6 SHELF UNIT



8 SHELF UNIT

| W                         | D  | H  |         | 5-Shelf Unit<br>Cat No.        | 6-Shelf Unit<br>Cat No.       | 8-Shelf Unit<br>Cat No.             | Shelf<br>Capacity* |
|---------------------------|----|----|---------|--------------------------------|-------------------------------|-------------------------------------|--------------------|
| <b>Medium-Duty</b>        |    |    |         |                                |                               |                                     |                    |
| 36                        | 12 | 87 | Starter | 4520-12                        | 4521-12                       | 4523-12                             | 500*               |
| 36                        | 12 | 87 | Adder   | A4520-12                       | A4521-12                      | A4523-12                            | 500*               |
| 36                        | 18 | 87 | Starter | 4520-18                        | 4521-18                       | 4523-18                             | 500*               |
| 36                        | 18 | 87 | Adder   | A4520-18                       | A4521-18                      | A4523-18                            | 500*               |
| 36                        | 24 | 87 | Starter | 4520-24                        | 4521-24                       | 4523-24                             | 500*               |
| 36                        | 24 | 87 | Adder   | A4520-24                       | A4511-24                      | A4523-24                            | 500*               |
| 48                        | 12 | 87 | Starter | 4720-12                        | 4721-12                       | 4723-12                             | 375*               |
| 48                        | 12 | 87 | Adder   | A4720-12                       | A4721-12                      | A4723-12                            | 375*               |
| 48                        | 18 | 87 | Starter | 4720-18                        | 4721-18                       | 4723-18                             | 375*               |
| 48                        | 18 | 87 | Adder   | A4720-18                       | A4721-18                      | A4723-18                            | 375*               |
| 48                        | 24 | 87 | Starter | 4720-24                        | 4721-24                       | 4723-24                             | 350*               |
| 48                        | 24 | 87 | Adder   | A4720-24                       | A4721-24                      | A4723-24                            | 350*               |
| <b>Heavy-Duty</b>         |    |    |         |                                |                               |                                     |                    |
| 36                        | 12 | 87 | Starter | 5520-12                        | 5521-12                       | 5523-12                             | 800*               |
| 36                        | 12 | 87 | Adder   | A5520-12                       | A5521-12                      | A5523-12                            | 800*               |
| 36                        | 18 | 87 | Starter | 5520-18                        | 5521-18                       | 5523-18                             | 800*               |
| 36                        | 18 | 87 | Adder   | A5520-18                       | A5521-18                      | A5523-18                            | 800*               |
| 36                        | 24 | 87 | Starter | 5520-24                        | 5521-24                       | 5523-24                             | 800*               |
| 36                        | 24 | 87 | Adder   | A5520-24                       | A5521-24                      | A5523-24                            | 800*               |
| 48                        | 12 | 87 | Starter | 5720-12                        | 5721-12                       | 5723-12                             | 400*               |
| 48                        | 12 | 87 | Adder   | A5720-12                       | A5721-12                      | A5723-12                            | 400*               |
| 48                        | 18 | 87 | Starter | 5720-18                        | 5721-18                       | 5723-18                             | 450*               |
| 48                        | 18 | 87 | Adder   | A5720-18                       | A5721-18                      | A5723-18                            | 450*               |
| 48                        | 24 | 87 | Starter | 5720-24                        | 5721-24                       | 5723-24                             | 500*               |
| 48                        | 24 | 87 | Adder   | A5720-24                       | A5721-24                      | A5723-24                            | 500*               |
| <b>Extra Heavy-Duty</b>   |    |    |         |                                |                               |                                     |                    |
| 36                        | 12 | 87 | Starter | 7520-12                        | 7521-12                       | 7523-12                             | 1100*              |
| 36                        | 12 | 87 | Adder   | A7520-12                       | A7521-12                      | A7523-12                            | 1100*              |
| 36                        | 18 | 87 | Starter | 7520-18                        | 7521-18                       | 7523-18                             | 1200*              |
| 36                        | 18 | 87 | Adder   | A7520-18                       | A7521-18                      | A7523-18                            | 1200*              |
| 36                        | 24 | 87 | Starter | 7520-24                        | 7521-24                       | 7523-24                             | 1250*              |
| 36                        | 24 | 87 | Adder   | A7520-24                       | A7521-24                      | A7523-24                            | 1250*              |
| 48                        | 12 | 87 | Starter | 7720-12                        | 7721-12                       | 7723-12                             | 750*               |
| 48                        | 12 | 87 | Adder   | A7720-12                       | A7721-12                      | A7723-12                            | 750*               |
| 48                        | 18 | 87 | Starter | 7720-18                        | 7721-18                       | 7723-18                             | 900*               |
| 48                        | 18 | 87 | Adder   | A7720-18                       | A7721-18                      | A7723-18                            | 900*               |
| 48                        | 24 | 87 | Starter | 7720-24                        | 7721-24                       | 7723-24                             | 900*               |
| 48                        | 24 | 87 | Adder   | A7720-24 A                     | 7721-24                       | A7723-24                            | 900*               |
| <b>Additional Shelves</b> |    |    |         | <b>Medium-Duty<br/>Cat No.</b> | <b>Heavy-Duty<br/>Cat No.</b> | <b>Extra Heavy-Duty<br/>Cat No.</b> |                    |
| 36                        | 12 |    |         | 5135-3612                      | 5138-3612                     | 5139-3612                           | See Above          |
| 36                        | 18 |    |         | 5135-3618                      | 5138-3618                     | 5139-3618                           | See Above          |
| 36                        | 24 |    |         | 5135-3624                      | 5138-3624                     | 5139-3624                           | See Above          |
| 48                        | 12 |    |         | 5135-4812                      | 5138-4812                     | 5139-4812                           | See Above          |
| 48                        | 18 |    |         | 5135-4818                      | 5138-4818                     | 5139-4818                           | See Above          |
| 48                        | 24 |    |         | 5135-4824                      | 5138-4824                     | 5139-4824                           | See Above          |

\* Shelf capacity based on a factor of 1.65

Color for all components 725 Hallowell Gray. Optional colors are available at a nominal charge, additional lead times apply.

**CLOSED UNITS:** Starter units include two beaded front posts, two angle back posts, one back panel assembly, two side panel assemblies and 5-8 shelves. Adder units include one beaded front post, two angle back posts, one back panel, one side panel and 5-8 shelves.

**5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS**

**57**

### BEADED FRONT POSTS



True flush construction. Slotted on 1-1/2" centers to permit easy shelf adjustment. Multiple posts can be spliced for added height.

| Part No  | Width  | Depth   | Height |
|----------|--------|---------|--------|
| 5002-3W  | 11/16" | 2-9/16" | 3'3"   |
| 5002-6W  | 11/16" | 2-9/16" | 6'3"   |
| 5002-7W  | 11/16" | 2-9/16" | 7'3"   |
| 5002-8W  | 11/16" | 2-9/16" | 8'3"   |
| 5002-10W | 11/16" | 2-9/16" | 10'3"  |
| 5002-12W | 11/16" | 2-9/16" | 12'3"  |
| 5002-14W | 11/16" | 2-9/16" | 14'3"  |
| 5002-16W | 11/16" | 2-9/16" | 16'3"  |

### ANGLE BACK POSTS



Angles for single or end units. Slotted on 1-1/2" centers to permit easy shelf adjustment. Multiple posts can be spliced for added height.

| Part No | Width   | Depth   | Height |
|---------|---------|---------|--------|
| 5004-3  | 1-3/16" | 2-5/16" | 3'3"   |
| 5004-6  | 1-3/16" | 2-5/16" | 6'3"   |
| 5004-7  | 1-3/16" | 2-5/16" | 7'3"   |
| 5004-8  | 1-3/16" | 2-5/16" | 8'3"   |
| 5004-10 | 1-3/16" | 2-5/16" | 10'3"  |
| 5004-12 | 1-3/16" | 2-5/16" | 12'3"  |
| 5004-14 | 1-3/16" | 2-5/16" | 14'3"  |
| 5004-16 | 1-3/16" | 2-5/16" | 16'3"  |


### T- POSTS



Constructed by spot welding two back posts together. For use when adjoining models are added to form a continuous row. Multiple posts can be spliced for added height.

| Part No | Width  | Depth   | Height |
|---------|--------|---------|--------|
| 5006-3  | 2-3/8" | 2-5/16" | 3'3"   |
| 5006-6  | 2-3/8" | 2-5/16" | 6'3"   |
| 5006-7  | 2-3/8" | 2-5/16" | 7'3"   |
| 5006-8  | 2-3/8" | 2-5/16" | 8'3"   |
| 5006-10 | 2-3/8" | 2-5/16" | 10'3"  |
| 5006-12 | 2-3/8" | 2-5/16" | 12'3"  |
| 5006-14 | 2-3/8" | 2-5/16" | 14'3"  |
| 5006-16 | 2-3/8" | 2-5/16" | 16'3"  |

### POST SPLICE CHANNELS



A channel formed internal splice. Used to splice beaded front posts for added height. Also, to splice back posts and T-posts

| Part No | Width | Depth | Height |
|---------|-------|-------|--------|
| 5009    | -     | -     | -      |

### BACK SWAY BRACES



1" x 11 ga. steel strip with safety edges. One pair of braces are bolted together at center to form an "X". Ends are rounded and pierced for mounting to rear posts.

See technical data on page 67 for bracing information

| Part No  | Width | Depth | Height |
|----------|-------|-------|--------|
| 5342-44* | 36"   | -     | -      |
| 5342-55* | 42"   | -     | -      |
| 5342-55* | 48"   | -     | -      |

\*Also available from stock in Platinum color

### SIDE SWAY BRACES



1" x 11 ga. steel strip with safety edges. One pair of braces are bolted together at the center to form an "X". Ends are rounded and pierced for attaching to front and rear posts in the side position. See technical data on page 53 for bracing information.

| Part No | Width | Depth | Height |
|---------|-------|-------|--------|
| 5344-12 | -     | 12"   | -      |
| 5344-15 | -     | 15"   | -      |
| 5344-18 | -     | 18"   | -      |
| 5344-24 | -     | 24"   | -      |
| 5344-30 | -     | 30"   | -      |
| 5344-32 | -     | 32"   | -      |
| 5344-36 | -     | 36"   | -      |

### BACK PANELS



Two piece sections punched on 1" centers at vertical edges and center for mounting on back of posts and shelves in models up to 48" wide.

| Part No   | Width | Depth | Height |
|-----------|-------|-------|--------|
| 5110-3603 | 36"   | -     | 3'3"   |
| 5110-3606 | 36"   | -     | 6'3"   |
| 5110-3607 | 36"   | -     | 7'3"   |
| 5110-4203 | 42"   | -     | 3'3"   |
| 5110-4206 | 42"   | -     | 6'3"   |
| 5110-4207 | 42"   | -     | 7'3"   |
| 5110-4803 | 48"   | -     | 3'3"   |
| 5110-4806 | 48"   | -     | 6'3"   |
| 5110-4807 | 48"   | -     | 7'3"   |

NOTE: Backs greater than 3'-3" will be shipped in multiple pieces.

Denotes Stock Component

\*Also available from stock in Platinum color

**NOTE:** For requirements above 16'-3" high, multiple posts can be spliced using 5009 post splice channels without compromising capacity. See page 67 for unit load and sway brace information.

Color for all components: 725 Hallowell Gray


COLOR  
SELECTION

725  
HALLOWELL GRAY  
(HG)

# COMPONENTS & DIMENSIONS

# Hallowell®

## BACK PANEL CLIPS



Formed to fit bottom flange of standard shelf and tabbed to pick up holes in center of back panel section. Holds back panel to shelf and prevents panel bowing.

| Part No | Width | Depth | Height |
|---------|-------|-------|--------|
| 5120    | -     | -     | -      |

## SIDE PANELS



Two piece panels are bolted to standard Beaded, Angle and Tee Posts when solid sides are required.


| Part No   | Width | Depth | Height |
|-----------|-------|-------|--------|
| 5093-1203 | -     | 12"   | 3'3"   |
| 5093-1206 | -     | 12"   | 6'3"   |
| 5093-1207 | -     | 12"   | 7'3"   |
| 5093-1507 | -     | 15"   | 7'3"   |
| 5093-1803 | -     | 18"   | 3'3"   |
| 5093-1806 | -     | 18"   | 6'3"   |
| 5093-1807 | -     | 18"   | 7'3"   |
| 5093-2403 | -     | 24"   | 3'3"   |
| 5093-2406 | -     | 24"   | 6'3"   |
| 5093-2407 | -     | 24"   | 7'3"   |
| 5093-3007 | -     | 30"   | 7'3"   |
| 5093-3607 | -     | 36"   | 7'3"   |

NOTE: Sides greater than 3'-3" will be shipped in multiple pieces.

## SHELVES


Roll formed rectangular tubular shaped front and rear edges with return flanges welded on 3" centers to underside of shelf. Sides are triple flanged. All four corners are lapped and welded. Top pierced to accept dividers.

### MEDIUM-DUTY BOX BEAM SHELVES (CLASS 0)



| Part No   | Width | Depth | Capacity Per Shelf |
|-----------|-------|-------|--------------------|
| 5135-3612 | 36"   | 12"   | 500 lbs            |
| 5135-3615 | 36"   | 15"   | 500 lbs            |
| 5135-3618 | 36"   | 18"   | 500 lbs            |
| 5135-3624 | 36"   | 24"   | 500 lbs            |
| 5135-4812 | 48"   | 12"   | 375 lbs            |
| 5135-4818 | 48"   | 18"   | 375 lbs            |
| 5135-4824 | 48"   | 24"   | 375 lbs            |


## HEAVY-DUTY BOX BEAM SHELVES (CLASS 1)



| Part No    | Width | Depth | Capacity Per Shelf |
|------------|-------|-------|--------------------|
| 5138-3612  | 36"   | 12"   | 800 lbs            |
| 5138-3615  | 36"   | 15"   | 800 lbs            |
| 5138-3618* | 36"   | 18"   | 800 lbs            |
| 5138-3624* | 36"   | 24"   | 800 lbs            |
| 5138-3630  | 36"   | 30"   | 500 lbs            |
| 5138-3636  | 36"   | 36"   | 500 lbs            |
| 5138-4212  | 42"   | 12"   | 600 lbs            |
| 5138-4215  | 42"   | 15"   | 600 lbs            |
| 5138-4218  | 42"   | 18"   | 600 lbs            |
| 5138-4224  | 42"   | 24"   | 600 lbs            |
| 5138-4230  | 42"   | 30"   | 625 lbs            |
| 5138-4232  | 42"   | 32"   | 575 lbs            |
| 5138-4236  | 42"   | 36"   | 475 lbs            |
| 5138-4812  | 48"   | 12"   | 400 lbs            |
| 5138-4815  | 48"   | 15"   | 425 lbs            |
| 5138-4818* | 48"   | 18"   | 450 lbs            |
| 5138-4824* | 48"   | 24"   | 500 lbs            |
| 5138-4830  | 48"   | 30"   | 500 lbs            |
| 5138-4836  | 48"   | 36"   | 500 lbs            |

\*Also available from stock in Platinum color

## EXTRA HEAVY-DUTY BOX BEAM SHELVES (CLASS 2)



| Part No    | Width | Depth | Capacity Per Shelf |
|------------|-------|-------|--------------------|
| 5139-3612  | 36"   | 12"   | 1100 lbs           |
| 5139-3615  | 36"   | 15"   | 1100 lbs           |
| 5139-3618* | 36"   | 18"   | 1200 lbs           |
| 5139-3624* | 36"   | 24"   | 1250 lbs           |
| 5139-3630  | 36"   | 30"   | 900 lbs            |
| 5139-3636  | 36"   | 36"   | 900 lbs            |
| 5139-4212  | 42"   | 12"   | 1100 lbs           |
| 5139-4215  | 42"   | 15"   | 1100 lbs           |
| 5139-4218  | 42"   | 18"   | 1050 lbs           |
| 5139-4224  | 42"   | 24"   | 900 lbs            |
| 5139-4230  | 42"   | 30"   | 1000 lbs           |
| 5139-4232  | 42"   | 32"   | 900 lbs            |
| 5139-4236  | 42"   | 36"   | 900 lbs            |
| 5139-4812  | 48"   | 12"   | 750 lbs            |
| 5139-4815  | 48"   | 15"   | 750 lbs            |
| 5139-4818* | 48"   | 18"   | 900 lbs            |
| 5139-4824* | 48"   | 24"   | 900 lbs            |
| 5139-4830  | 48"   | 30"   | 750 lbs            |
| 5139-4836  | 48"   | 36"   | 750 lbs            |

\*Also available from stock in Platinum color

## SHELF CLIP




One-piece zinc plated compression clip fits snugly against side of posts to hold shelves in place. Four required per shelf.

| Part No | Width | Depth | Capacity Per Shelf |
|---------|-------|-------|--------------------|
| 5133    | -     | -     | -                  |

Denotes Stock Component

\*Also available from stock in Platinum color

### BASE STRIPS



Shaped to fit directly between bottom shelf and floor. 2-15/16" high giving an overall base height including bottom shelf of 3".

| Part No | Width | Depth | Height   |
|---------|-------|-------|----------|
| 5233-36 | 36"   | -     | 2-15/16" |
| 5233-42 | 42"   | -     | 2-15/16" |
| 5233-48 | 48"   | -     | 2-15/16" |

### LABEL HOLDERS



Pierced for attaching to front flange of shelves with top and bottom edges folded over to accommodate labels approximately 1" high.

| Part No   | Width | Depth | Height |
|-----------|-------|-------|--------|
| 5370-3601 | 36"   | -     | 1"     |
| 5370-4201 | 42"   | -     | 1"     |
| 5370-4801 | 48"   | -     | 1"     |

### WELDED END PANELS



Sections consisting of beaded front post, angle back post and one-piece side panel. For individual models or starting and ending models in a continuous shelving row. Factory welded.

| Part No   | Width | Depth | Height |
|-----------|-------|-------|--------|
| 5092-1203 | -     | 12"   | 3'3"   |
| 5092-1206 | -     | 12"   | 6'3"   |
| 5092-1207 | -     | 12"   | 7'3"   |
| 5092-1208 | -     | 12"   | 8'3"   |
| 5092-1210 | -     | 12"   | 10'3"  |
| 5092-1507 | -     | 15"   | 7'3"   |
| 5092-1803 | -     | 18"   | 3'3"   |
| 5092-1806 | -     | 18"   | 6'3"   |
| 5092-1807 | -     | 18"   | 7'3"   |
| 5092-1808 | -     | 18"   | 8'3"   |
| 5092-1810 | -     | 18"   | 10'3"  |
| 5092-2403 | -     | 24"   | 3'3"   |
| 5092-2406 | -     | 24"   | 6'3"   |
| 5092-2407 | -     | 24"   | 7'3"   |
| 5092-2408 | -     | 24"   | 8'3"   |
| 5092-2410 | -     | 24"   | 10'3"  |
| 5092-3007 | -     | 30"   | 7'3"   |
| 5092-3607 | -     | 36"   | 7'3"   |

**NOTE:** For requirements above 10'-3" high, multiple panels can be spliced using 5009 post splice channels without compromising capacity. See page 67 for unit load and sway brace information. **Color for all components:** 725 Hallowell Gray

### SWINGING DOORS (WITH LOCKS)

Reinforced door / frame attaches to beaded front posts and opens quietly to a full 150°. Chrome finished handle with built-in grooved key cylinder lock. Positive 3-point locking. Universal clips (Part No. 5315) are required to mount doors on beaded front posts.



| Part No   | Width | Depth | Height |
|-----------|-------|-------|--------|
| 5300-3636 | 36"   | -     | 36"    |
| 5300-3648 | 36"   | -     | 48"    |
| 5300-3684 | 36"   | -     | 84"    |
| 5300-4836 | 48"   | -     | 36"    |
| 5300-4848 | 48"   | -     | 48"    |
| 5300-4884 | 48"   | -     | 84"    |

### UNIVERSAL CLIP (WITH HARDWARE)



Available in sets of 6. One set required to mount swinging doors to beaded front posts.

| Part No | Width | Depth | Height |
|---------|-------|-------|--------|
| 5315    | -     | -     | -      |


### FOOT PLATES



11 gauge with 14 gauge mounting bracket welded to top for bolting to post. Has 7/16" diameter hole for floor anchor bolts. Use same shim as H-Posts.

| Part No | Width  | Depth  | Height |
|---------|--------|--------|--------|
| 5050    | 2-1/4" | 3-1/2" | -      |

### WELDED T-PANELS



Sections consisting of beaded front post, back T-Post and one-piece side panel. For use when adjoining models are added to form a continuous shelving row. Factory welded.

| Part No   | Width | Depth | Height |
|-----------|-------|-------|--------|
| 5094-1203 | -     | 12"   | 3'3"   |
| 5094-1206 | -     | 12"   | 6'3"   |
| 5094-1207 | -     | 12"   | 7'3"   |
| 5094-1208 | -     | 12"   | 8'3"   |
| 5094-1210 | -     | 12"   | 10'3"  |
| 5094-1507 | -     | 15"   | 7'3"   |
| 5094-1803 | -     | 18"   | 3'3"   |
| 5094-1806 | -     | 18"   | 6'3"   |
| 5094-1807 | -     | 18"   | 7'3"   |
| 5094-1808 | -     | 18"   | 8'3"   |
| 5094-1810 | -     | 18"   | 10'3"  |
| 5094-2403 | -     | 24"   | 3'3"   |
| 5094-2406 | -     | 24"   | 6'3"   |
| 5094-2407 | -     | 24"   | 7'3"   |
| 5094-2408 | -     | 24"   | 8'3"   |
| 5094-2410 | -     | 24"   | 10'3"  |
| 5094-3007 | -     | 30"   | 7'3"   |
| 5094-3607 | -     | 36"   | 7'3"   |

Denotes Stock Component

COLOR  
SELECTION

725  
HALLOWELL GRAY  
(HG)

# COMPONENTS & DIMENSIONS

# Hallowell®

## BIN FRONT

Offset type with bead at top and triple flange at bottom to telescope over shelf flange.



| Part No   | Width | Depth | Height |
|-----------|-------|-------|--------|
| 5220-3601 | 36"   | -     | 1"     |
| 5220-3603 | 36"   | -     | 3"     |
| 5220-4203 | 42"   | -     | 3"     |
| 5220-4803 | 48"   | -     | 3"     |

## PARTIAL DIVIDERS

Offset type with bead at top and triple flange at bottom to telescope over shelf flange.



| Part No   | Width | Depth | Height |
|-----------|-------|-------|--------|
| 5250-1202 | -     | 12"   | 2"     |
| 5250-1204 | -     | 12"   | 4"     |


## H-POST SIDE SWAY BRACES



Used with  
H-Posts only.

| Part No | Width | Depth | Height |
|---------|-------|-------|--------|
| 5341-12 | -     | 12"   | -      |
| 5341-15 | -     | 15"   | -      |
| 5341-18 | -     | 18"   | -      |
| 5341-24 | -     | 24"   | -      |
| 5341-30 | -     | 30"   | -      |
| 5341-36 | -     | 36"   | -      |

## FULL DIVIDERS



Front edge beaded.  
Top, bottom and  
rear are flanged.

| Part No   | Width | Depth | Height |
|-----------|-------|-------|--------|
| 5240-1206 | -     | 12"   | 6"     |
| 5240-1209 | -     | 12"   | 9"     |
| 5240-1212 | -     | 12"   | 12"    |
| 5240-1806 | -     | 18"   | 6"     |
| 5240-1809 | -     | 18"   | 9"     |
| 5240-1812 | -     | 18"   | 12"    |
| 5240-2406 | -     | 24"   | 6"     |
| 5240-2409 | -     | 24"   | 9"     |
| 5240-2412 | -     | 24"   | 12"    |


## H-POSTS

Used for high-density shelving requirements. Used with standard Hi-Tech shelving components side sway braces (5341). Order H-Posts front and back. **Minimum order 100 posts.**



| Part No | Width  | Depth    | Height |
|---------|--------|----------|--------|
| 5003-7  | 1-1/2" | 2-15/16" | 7'3"   |
| 5003-8  | 1-1/2" | 2-15/16" | 8'3"   |
| 5003-10 | 1-1/2" | 2-15/16" | 10'3"  |
| 5003-12 | 1-1/2" | 2-15/16" | 12'3"  |
| 5003-14 | 1-1/2" | 2-15/16" | 14'3"  |
| 5003-16 | 1-1/2" | 2-15/16" | 16'3"  |

## H-POST SPLICES



Used to splice H-posts for added height requirements

| Part No       | Width | Depth | Height |
|---------------|-------|-------|--------|
| 5010 (Plated) | -     | -     | 9-3/4" |

## H-POST FOOT PLATE (Heavy-Duty)



Mounting bracket welded to top for bolting inside H-Posts.

| Part No       | Width | Depth  | Height |
|---------------|-------|--------|--------|
| 5015 (Plated) | 4"    | 3-1/2" | 3/8"   |

## H-POST SHIM PLATE



Fits under foot plate (Part no. 5015) for leveling.

| Part No       | Width | Depth  | Height |
|---------------|-------|--------|--------|
| 5016 (Plated) | 4"    | 3-1/2" | 1/16"  |


Denotes Stock Component

Denotes Marine Blue Stock Component

## MULTI-LEVEL HIGH-RISE SHELVING SYSTEMS

Complete high-rise modular systems make it easy to create that perfect shelving solution to maximize space in any facility.

Consult your sales representative for more information or contact us at: [info@Hallowell-List.com](mailto:info@Hallowell-List.com)

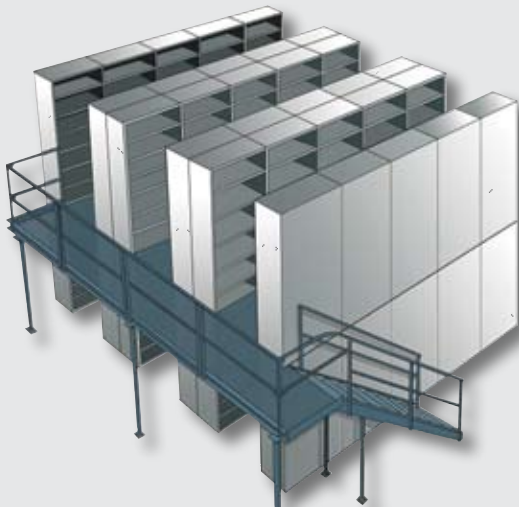

# HI-POST

HI-TECH™

HALLOWELL® High Capacity Shelving

**H-POST PROVIDES TWICE  
THE CAPACITY OF  
STANDARD POSTS**

H-Post High capacity Shelving is ideal when additional strength is required for any shelving installation. It is also recommended for multi-level high-rise applications.

H-Posts are fabricated from 14 gauge cold rolled steel and formed into a unique tubular design to provide more than twice the load capacity compared to standard posts.



## ONE PIECE SHELF CLIP

- Each shelf requires four of these sturdy and compact clips
- Clips key firmly into post slots to hold shelves securely in place
- Also fits Beaded Front, Angle Back Posts and T-Posts
- Provides independent shelf positioning on 1-1/2" centers
- Non-Intrusive clip sits flush with inside edge of front posts

## H-POSTS

- *Designed for high-density applications*
- *More than twice the capacity of standard posts*
- *Used at front and back*
- *Used with standard Hi-Tech components*

## CLOSED UNITS



8 Shelf Unit



6 Shelf Unit



5 Shelf Unit

COLOR  
SELECTION

711  
PLATINUM (PL)

H-POST  
COLOR  
SELECTION

707  
MARINE BLUE  
(MB)

**USE WITH STANDARD  
HI-TECH COMPONENTS**

**Hallowell®**

HI-TECH™ H-POST SHELVING

## OPEN UNITS



**8 Shelf Unit**



**6 Shelf Unit**



**5 Shelf Unit**

## ADDER UNITS



**Adder units are available in open and closed versions.**



**All models shown with the standard foot plate that provides a strong and secure anchoring point**



**Special triple point brace clip provides a strong and ridged anchor point for the cross braces.**

**AVAILABLE IN 7' AND 10' HIGH UNITS**

**5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS**

# HI-TECH™ H-POST

HALLOWELL® High Capacity Shelving

## H-POST OPEN SHELVING HEAVY AND EXTRA HEAVY-DUTY


STARTER  
UNIT

ADDER  
UNIT

5 SHELF  
UNIT

6 SHELF  
UNIT

8 SHELF  
UNIT

| W                         | D  | H   |         | 5-Shelf Unit<br>Cat No. | 6-Shelf Unit<br>Cat No.     | 8-Shelf Unit<br>Cat No. | Shelf<br>Capacity* |
|---------------------------|----|-----|---------|-------------------------|-----------------------------|-------------------------|--------------------|
| <b>Heavy-Duty</b>         |    |     |         |                         |                             |                         |                    |
| 36                        | 18 | 87  | Starter | H5510-1807              | H5511-1807                  | H5513-1807              | 800                |
| 36                        | 18 | 87  | Adder   | AH5510-1807             | AH5511-1807                 | AH5513-1807             | 800                |
| 36                        | 24 | 87  | Starter | H5510-2407              | H5511-2407                  | H5513-2407              | 800                |
| 36                        | 24 | 87  | Adder   | AH5510-2407             | AH5511-2407                 | AH5513-2407             | 800                |
| 36                        | 18 | 123 | Starter | H5510-1810              | H5511-1810                  | H5513-1810              | 800                |
| 36                        | 18 | 123 | Adder   | AH5510-1810             | AH5511-1810                 | AH5513-1810             | 800                |
| 36                        | 24 | 123 | Starter | H5510-2410              | H5511-2410                  | H5513-2410              | 800                |
| 36                        | 24 | 123 | Adder   | AH5510-2410             | AH5511-2410                 | AH5513-2410             | 800                |
| 48                        | 18 | 87  | Starter | H5710-1807              | H5711-1807                  | H5713-1807              | 450                |
| 48                        | 18 | 87  | Adder   | AH5710-1807             | AH5711-1807                 | AH5713-1807             | 450                |
| 48                        | 24 | 87  | Starter | H5710-2407              | H5711-2407                  | H5713-2407              | 500                |
| 48                        | 24 | 87  | Adder   | AH5710-2407             | AH5711-2407                 | AH5713-2407             | 500                |
| 48                        | 18 | 123 | Starter | H5710-1810              | H5711-1810                  | H5713-1810              | 450                |
| 48                        | 18 | 123 | Adder   | AH5710-1810             | AH5711-1810                 | AH5713-1810             | 450                |
| 48                        | 24 | 123 | Starter | H5710-2410              | H5711-2410                  | H5713-2410              | 500                |
| 48                        | 24 | 123 | Adder   | AH5710-2410             | AH5711-2410                 | AH5713-2410             | 500                |
| <b>Extra Heavy-Duty</b>   |    |     |         |                         |                             |                         |                    |
| 36                        | 18 | 87  | Starter | H7510-1807              | H7511-1807                  | H7513-1807              | 1200               |
| 36                        | 18 | 87  | Adder   | AH7510-1807             | AH7511-1807                 | AH7513-1807             | 1200               |
| 36                        | 24 | 87  | Starter | H7510-2407              | H7511-2407                  | H7513-2407              | 1250               |
| 36                        | 24 | 87  | Adder   | AH7510-2407             | AH7511-2407                 | AH7513-2407             | 1250               |
| 36                        | 18 | 123 | Starter | H7510-1810              | H7511-1810                  | H7513-1810              | 1200               |
| 36                        | 18 | 123 | Adder   | AH7510-1810             | AH7511-1810                 | AH7513-1810             | 1200               |
| 36                        | 24 | 123 | Starter | H7510-2410              | H7511-2410                  | H7513-2410              | 1250               |
| 36                        | 24 | 123 | Adder   | AH7510-2410             | AH7511-2410                 | AH7513-2410             | 1250               |
| 48                        | 18 | 87  | Starter | H7710-1807              | H7711-1807                  | H7713-1807              | 900                |
| 48                        | 18 | 87  | Adder   | AH7710-1807             | AH7711-1807                 | AH7713-1807             | 900                |
| 48                        | 24 | 87  | Starter | H7710-2407              | H7711-2407                  | H7713-2407              | 900                |
| 48                        | 24 | 87  | Adder   | AH7710-2407             | AH7711-2407                 | AH7713-2407             | 900                |
| 48                        | 18 | 123 | Starter | H7710-1810              | H7711-1810                  | H7713-1810              | 1200               |
| 48                        | 18 | 123 | Adder   | AH7710-1810             | AH7711-1810                 | AH7713-1810             | 1200               |
| 48                        | 24 | 123 | Starter | H7710-2410              | H7711-2410                  | H7713-2410              | 1250               |
| 48                        | 24 | 123 | Adder   | AH7710-2410             | AH7711-2410                 | AH7713-2410             | 1250               |
| <b>Additional Shelves</b> |    |     |         |                         |                             |                         |                    |
|                           |    |     |         | Heavy-Duty<br>Cat No.   | Extra Heavy-Duty<br>Cat No. |                         |                    |
| 36                        | 18 |     |         | 5138-3618PL             | 5139-3618PL                 |                         | See Above          |
| 36                        | 24 |     |         | 5138-3624PL             | 5139-3624PL                 |                         | See Above          |
| 48                        | 18 |     |         | 5138-4818PL             | 5139-4818PL                 |                         | See Above          |
| 48                        | 24 |     |         | 5138-4824PL             | 5139-4824PL                 |                         | See Above          |

\* Shelf capacity based on a factor of 1.65

**Color:** All posts, side sway braces, side panels are 707 Marine Blue.  
All shelves, back sway braces, back panels are 711 Platinum

**OPEN UNITS:** Starter units include four posts, one back sway brace assembly, two side sway brace assemblies and 5-8 shelves.  
Adder units include two posts, one back sway brace assembly, one side sway brace assembly and 5-8 shelves.

# H-POST CLOSED SHELVING HEAVY AND EXTRA HEAVY-DUTY

# Hallowell®

HI-TECH™ H-POST SHELVING

| W                            | D  | H   |         | 5-Shelf Unit<br>Cat No.       | 6-Shelf Unit<br>Cat No.             | 8-Shelf Unit<br>Cat No. | Shelf<br>Capacity* |
|------------------------------|----|-----|---------|-------------------------------|-------------------------------------|-------------------------|--------------------|
| <b>Heavy-Duty</b>            |    |     |         |                               |                                     |                         |                    |
| 36                           | 18 | 87  | Starter | H5520-1807                    | H5521-1807                          | H5523-1807              | 800                |
| 36                           | 18 | 87  | Adder   | AH5520-1807                   | AH5521-1807                         | AH5523-1807             | 800                |
| 36                           | 24 | 87  | Starter | H5520-2407                    | H5521-2407                          | H5523-2407              | 800                |
| 36                           | 24 | 87  | Adder   | AH5520-2407                   | AH5521-2407                         | AH5523-2407             | 800                |
| 36                           | 18 | 123 | Starter | H5520-1810                    | H5521-1810                          | H5523-1810              | 800                |
| 36                           | 18 | 123 | Adder   | AH5520-1810                   | AH5521-1810                         | AH5523-1810             | 800                |
| 36                           | 24 | 123 | Starter | H5520-2410                    | H5521-2410                          | H5523-2410              | 800                |
| 36                           | 24 | 123 | Adder   | AH5520-2410                   | AH5521-2410                         | AH5523-2410             | 800                |
| 48                           | 18 | 87  | Starter | H5720-1807                    | H5721-1807                          | H5723-1807              | 450                |
| 48                           | 18 | 87  | Adder   | AH5720-1807                   | AH5721-1807                         | AH5723-1807             | 450                |
| 48                           | 24 | 87  | Starter | H5720-2407                    | H5721-2407                          | H5723-2407              | 500                |
| 48                           | 24 | 87  | Adder   | AH5720-2407                   | AH5721-2407                         | AH5723-2407             | 500                |
| 48                           | 18 | 123 | Starter | H5720-1810                    | H5721-1810                          | H5723-1810              | 450                |
| 48                           | 18 | 123 | Adder   | AH5720-1810                   | AH5721-1810                         | AH5723-1810             | 450                |
| 48                           | 24 | 123 | Starter | H5720-2410                    | H5721-2410                          | H5723-2410              | 500                |
| 48                           | 24 | 123 | Adder   | AH5720-2410                   | AH5721-2410                         | AH5723-2410             | 500                |
| <b>Extra Heavy-Duty Duty</b> |    |     |         |                               |                                     |                         |                    |
| 36                           | 18 | 87  | Starter | H7520-1807                    | H7521-1807                          | H7523-1807              | 1200               |
| 36                           | 18 | 87  | Adder   | AH7520-1807                   | AH7521-1807                         | AH7523-1807             | 1200               |
| 36                           | 24 | 87  | Starter | H7520-2407                    | H7521-2407                          | H7523-2407              | 1250               |
| 36                           | 24 | 87  | Adder   | AH7520-2407                   | AH7521-2407                         | AH7523-2407             | 1250               |
| 36                           | 18 | 123 | Starter | H7520-1810                    | H7521-1810                          | H7523-1810              | 1200               |
| 36                           | 18 | 123 | Adder   | AH7520-1810                   | AH7521-1810                         | AH7523-1810             | 1200               |
| 36                           | 24 | 123 | Starter | H7520-2410                    | H7521-2410                          | H7523-2410              | 1250               |
| 36                           | 24 | 123 | Adder   | AH7520-2410                   | AH7521-2410                         | AH7523-2410             | 1250               |
| 48                           | 18 | 87  | Starter | H7720-1807                    | H7721-1807                          | H7723-1807              | 900                |
| 48                           | 18 | 87  | Adder   | AH7720-1807                   | AH7721-1807                         | AH7723-1807             | 900                |
| 48                           | 24 | 87  | Starter | H7720-2407                    | H7721-2407                          | H7723-2407              | 900                |
| 48                           | 24 | 87  | Adder   | AH7720-2407                   | AH7721-2407                         | AH7723-2407             | 900                |
| 48                           | 18 | 123 | Starter | H7720-1810                    | H7721-1810                          | H7723-1810              | 1200               |
| 48                           | 18 | 123 | Adder   | AH7720-1810                   | AH7721-1810                         | AH7723-1810             | 1200               |
| 48                           | 24 | 123 | Starter | H7720-2410                    | H7721-2410                          | H7723-2410              | 1250               |
| 48                           | 24 | 123 | Adder   | AH7720-2410                   | AH7721-2410                         | AH7723-2410             | 1250               |
| <b>Additional Shelves</b>    |    |     |         | <b>Heavy-Duty<br/>Cat No.</b> | <b>Extra Heavy-Duty<br/>Cat No.</b> |                         |                    |
| 36                           | 18 |     |         | 5138-3618PL                   | 5139-3618PL                         | See Above               |                    |
| 36                           | 24 |     |         | 5138-3624PL                   | 5139-3624PL                         | See Above               |                    |
| 48                           | 18 |     |         | 5138-4818PL                   | 5139-4818PL                         | See Above               |                    |
| 48                           | 24 |     |         | 5138-4824PL                   | 5139-4824PL                         | See Above               |                    |

\* Shelf capacity based on a factor of 1.65

**Color:** All posts, side sway braces, side panels are 707 Marine Blue.  
All shelves, back sway braces, back panels are 711 Platinum

**CLOSED UNITS:** Starter units include four posts, one back panel assembly, two side panel assemblies and 5-8 shelves.  
Adder units include two posts, one back panel assembly, one side panel assembly and 5-8 shelves.



STARTER UNIT



ADDER UNIT



5 SHELF UNIT



6 SHELF UNIT




8 SHELF UNIT

5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS

65

**SYSTEM LAYOUT INFORMATION**

**Standard Shelving with Hi-Tech Shelves**

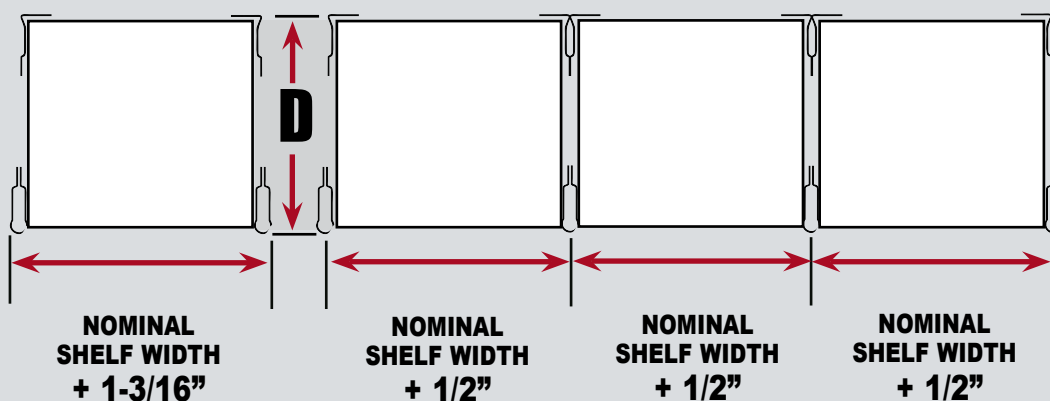


**PLUS ADD  $3/4"$  PER ROW**

FOR "D" - *SINGLE FACE* ADD  $3/16"$  TO NOMINAL SHELF DEPTH

FOR "D" - *DOUBLE FACE* ADD  $3/8"$  TO NOMINAL SHELF DEPTH

**H-Post Shelving with Hi-Tech Shelves**

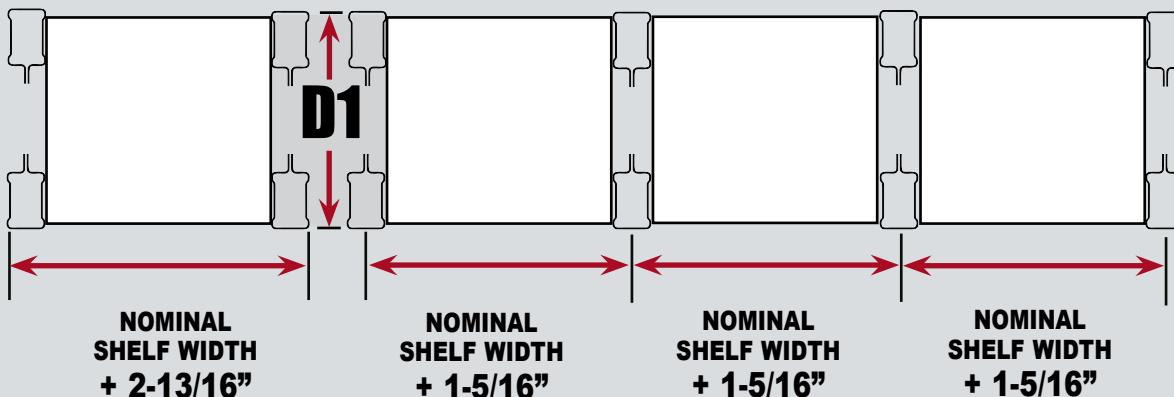

**PLUS ADD  $1-1/2"$  PER ROW**

FOR 'D1' - *SINGLE FACE* ADD  $5/16"$  TO NOMINAL SHELF DEPTH

FOR "D1" - *DOUBLE FACE* CLOSED MODELS ADD  $13/16"$  TO NOMINAL SHELF DEPTH

FOR "D1" - *DOUBLE FACE* OPEN MODELS ADD  $29/32"$  TO NOMINAL SELF DEPTH

NOTE: SHELF WIDTH IS  $5/16"$  UNDER NOMINAL

**NOTE:** Width of posts should be added to the nominal shelf width in any floor plan to determine the overall shelving width.  
Check "D" and "D1" dimensions for depth/creepage.

## UNIT LOAD CAPACITY INFORMATION - 1.65 SAFETY FACTOR


UNIT LOAD  
(000 LBS)



STANDARD POST



H-POST

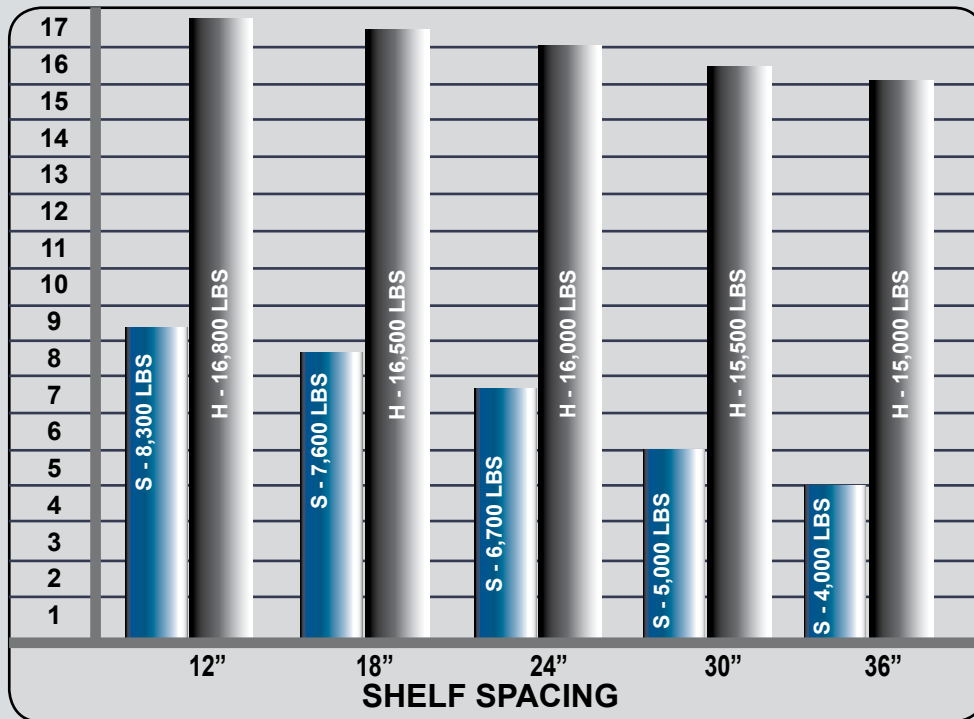

Before selecting type of post, consideration should be given to loads to be carried. Use the formula below to get unit load, then select post type from table.

$$(B-2) \times A = \text{Unit Load}$$

A=Shelf Load  
(See note 2)  
B=Shelves per unit  
(includes top and bottom shelves)

### WARNING:

Use H-Posts for:


- High-rise applications
- Pass-through applications regardless of load
- High-density, multi-level applications




## TYPICAL SWAY BRACE INSTALLATIONS FOR SEISMIC ZONE NO. 0 & 1

Standard Shelving (Beaded Front Posts)

High-Density Shelving (H-Posts)



Use of Side Sway Braces  
(Part No. 5344 – Standard Shelving)  
(Part No. 5341–High-Density Shelving)

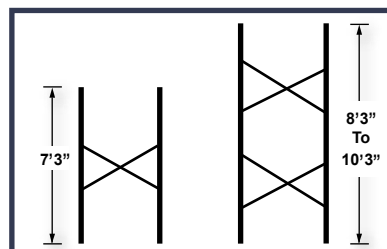

Use of Back Sway Braces (Part No. 5342)  
for both standard and high density shelving



**NOTES:** 1-When splicing posts for increased heights or for multi-level shelving, use the proper number of braces required for the height of the posts being added.  
**Example:** a 10'-3" model increased another 10'-3" in height would require 4 sets of side sway braces and 4 sets of back braces.  
2-For additional bracing requirements in Seismic Zones No. 2, 3 and 4, consult the Hallowell Applications Engineering Department.



### **Beaded Front Posts:**

Fabricated from 14 gauge cold rolled steel and roll formed into an 11/16" wide x 2-9/16" deep tubular section. Rear flanges are welded on 6" centers to provide maximum strength. Sides of the post are punched 1-1/2" on center with 3/8" x 7/8" rectangular slots to receive shelf clip. Rear flanges of the post have holes punched on 3" centers for the attachment of side sway braces or field attached solid side panels. Provide (1) Beaded Front Post between each adjoining section and at row ends.

### **Angle Back Posts:**

Fabricated of 14 gauge cold rolled steel and roll formed into a modified unequal angle shape. The long leg shall have holes punched on 1-1/2" centers with 3/8" x 7/8" rectangular slots to receive shelf clip. The leading edge shall have holes punched on 3" centers for the attachment of side sway braces. The short leg shall have holes punched on 3" centers for the attachment of back sway braces or back panels. Provide (1) Angle Back Post at each row end for open-type shelving applications.

### **T-Posts:**

Shall be fabricated of two angle back posts. The posts are welded together back-to-back to form a "T". Welds are on 6" centers for maximum strength. Posts are used for intermediate back post applications. Provide (1) T Post between each adjoining section for open-type shelving applications.

### **Post Splice Channels:**

Fabricated from 16 gauge cold rolled steel and formed into a 11/32" x 1-1/8" x 11/32" channel. 1-1/8" flange is punched with four holes for assembling to upper and lower posts. Provide at all post splices when additional height is required.

### **Side Sway Braces:**

1" x 11 gauge cold rolled steel strip with safety edges to eliminate sharpness. The center of two identical pieces shall be punched to be bolted together forming an "X". Ends shall be rounded and punched for attaching to front and back posts. Provide between adjoining sections and at row ends for open-type shelving applications.

### **Back Sway Braces:**

1" x 11 gauge cold rolled steel strip with safety edges to eliminate sharpness. The center of two identical pieces shall be punched to be bolted together forming an "X". Ends shall be rounded and punched for attaching to two back posts. Provide at back of all open-type shelving applications.

### **Back Panels:**

Fabricated from 24 gauge cold rolled sheet steel. The two outer edges and the center shall be punched with 5/16" diameter holes on 1" centers running vertically for assembling to back posts. The center row is used to attach to rear of shelf using Back Clips. Provide at back of closed-type shelving sections. For heights greater than 3'-3", multiple sections will be provided to achieve height.

### **Side Panels:**

Fabricated from 24 gauge cold rolled sheet steel, field bolted to front and back posts. Provide at all side locations for closed shelving sections. For heights greater than 3'-3", multiple sections will be provided to achieve height.

### **End Panels:**

Fabricated from 24 gauge cold rolled sheet steel, factory bolted to a Beaded Front Post and an Angle Back Post. Provide at row ends of closed-type shelving applications or where closed ends are desired on open-type shelving applications. For heights greater than 3'-3", multiple sections will be provided to achieve height.

### **T-Panels:**

Fabricated from 24 gauge cold rolled sheet steel factory bolted to a Beaded Front Post and two angle back Posts. Provide between sections of closed-type shelving applications. For heights greater than 3'-3", multiple sections will be provided to achieve height.

### **Foot Plates:**

2-1/4" x 3-1/2" x 12 gauge steel plate with angle bracket welded on top. The angle bracket is punched for fastening to front and back posts. The plate shall have a 7/16" diameter hole punched on one end for floor anchoring and be embossed on the other end for Shim Plate alignment. Provide as required for floor anchoring or when shimming is required for a level installation.

### **Shim Plates:**

2-1/4" x 3-1/2" x 16 gauge cold rolled sheet steel. Fabricated to fit under the Foot Plate. One end is embossed to fit into the embossment in the Foot Plate to keep them properly aligned. The other end shall have a 7/16" diameter hole to allow floor anchoring. Provide as required when shimming is required for a level installation.

**Contact factory for H-post shelving specifications.**

A TRADITION OF QUALITY

## Shelves - Medium Duty:

Formed with two ribs along the horizontal front and rear edge and are stamped on the top left corner for identification. Class 0 shelves are fabricated from cold rolled steel and have roll formed rectangular tubular shaped front and rear edges with return bends resistance welded to the under side of shelf. Welds are spaced 3" on center to provide maximum strength. Sides are triple flanged to form a channel. All four corners are lapped and resistance welded to provide a rigid corner and add extra strength to the shelf. Top surface shall be punched for attaching Shelf Dividers From left to right on 1-1/2" centers, front and back, for 36" wide x 12", 15", 18" and 24" deep shelves. All other sizes are punched on 3" centers. Front and rear surfaces are punched for attaching accessories. Tubular front edge is designed to protect against impact loads. Used for uniformly distributed loads up to 500 pounds.

## Shelves - Heavy Duty:

Formed with two ribs along the horizontal front and rear edge and are stamped on the top left corner for identification. Class 1 shelves are fabricated from heavy gauge cold rolled steel and have roll formed rectangular tubular shaped front and rear edges with return bends resistance welded to the under side of shelf. Welds are spaced 3" on center to provide maximum strength. Sides are triple flanged to form a channel. All four corners are lapped and resistance welded to provide a rigid corner and add extra strength to the shelf. Top surface shall be punched for attaching Shelf Dividers from left to right on 1-1/2" centers, front and back, for 36" wide x 12", 15", 18" and 24" deep shelves. All other sizes are punched on 3" centers. Front and rear surfaces are punched for attaching accessories. Tubular front edge is designed to protect against impact loads. Used for uniformly distributed loads up to 800 pounds.

## Shelves - Extra Heavy Duty:

Formed with two ribs along the horizontal front and rear edge and are stamped on the top left corner for identification. Class 2 shelves are fabricated from extra heavy gauge cold rolled steel and have roll formed rectangular tubular shaped front and rear edges with return bends resistance welded to the under side of shelf. Welds are spaced 3" on center to provide maximum strength. Sides are triple flanged to form a channel. All four corners are lapped and resistance welded to provide a rigid corner and add extra strength to the shelf. Top surface shall be punched for attaching Shelf Dividers from left to right on 1-1/2" centers, front and back, for 36" wide x 12", 15", 18" and 24" deep shelves. All other sizes are punched on 3" centers. Front and rear surfaces are punched for attaching accessories. Tubular front edge is designed to protect against impact loads. Used for uniformly distributed loads up to 1,200 pounds.

## Shelf Clips:

Shall be a one piece compression clip drawn from 13 gauge cold rolled steel and zinc plated. Fits snugly against side of post to hold shelves in place. Provide four per shelf.

## Base Strip:

Made from 22 gauge cold rolled steel offset at top to fit behind the front flange of shelf. Punched for bolting to holes in the front flange of shelf. Bottom is flanged to resist bending.

## Label Holders:

Made from 22 gauge cold rolled steel. Punched on ends and center for attaching to the front edge of shelves with top and bottom edges folded over to accommodate labels approximately 1" high.

## Bin Fronts:

Fabricated from 18 gauge cold rolled steel. The top edge is formed into a bead. The bottom shall be triple flanged to telescope over shelf flange and punched to provide a means of attaching to shelf.

## Full Dividers:

Fabricated from 24 gauge cold rolled steel. The front edge is beaded. Top and bottom shall be flanged and punched to provide a means of attaching to shelves. The back edge is flanged to provide rigidity. Dividers are installed using snap-in nylon fasteners.

## Partial Dividers:

Fabricated from 22 gauge cold rolled steel. The top corners are rounded for increased safety. The bottom flange is punched to provide a means of attaching to shelf. Dividers are installed using snap-in nylon fasteners.

## Swinging Doors:

Fabricated from 20 gauge cold rolled steel with box flanges on all four edges. Swinging doors shall be reinforced with a steel pan type panel inside the door. Doors are bolted to a welded door frame consisting of top and bottom channels and angles at the sides. The door frame side angles are punched on 1" centers for attachment. Universal Clips shall be supplied to attach door & frame assembly to the Beaded Front Posts. One chrome finished turn handle with built-in cylinder key lock shall be included providing three point positive locking.

## Universal Clip:

Fabricated from 16 gauge cold rolled steel formed into an angle with three slotted holes on one flange and one long slot in the other flange, which is also offset to fit in Beaded Front Post. Provide when Swinging Doors are required.

QUALITY SINCE 1903

STOCK → PROGRAM

THE FASTEST SHIPPING IN THE INDUSTRY...

# HEAVY-DUTY INDUSTRIAL GRADE STEEL SHELVING

## NO CROSS BRACES **DURATECH**™ PASS-THRU STEEL SHELVING

DuraTech is Hallowell's newest line of pass-thru steel shelving requiring no cross braces allowing access from all sides while providing the maximum strength, durability and stability needed to handle most industrial applications. DuraTech offers versatility and durability for today's modern facilities.

*Our complete line of shelving is designed and engineered to the highest standards.*

### FEATURES:

- Access from all 4 sides
- Top and bottom firmly attached with steel-grip nuts for superior strength
- Available in 5, 7 and 8 shelf models
- Four Angle Posts are used per section allowing units to be individually located, bolted side-by-side or bolted back-to-back.
- Each intermediate shelf uses four sturdy and compact clips
- Clips key firmly into post slots to hold shelves securely in place
- Provides independent positioning of intermediate shelves on 1-1/2" centers
- Bottom shelf is positioned to prevent debris from collecting beneath unit

**See sizes, technical information and available models on pages 60 and 61.**

**OUR UNIQUE GRIP NUT DESIGN CREATES A VERY STRONG AND RIGID STRUCTURE**



**360° ACCESS  
CREATES  
A MORE  
EFFICIENT  
STORAGE  
SYSTEM!**



**FULLY ADJUSTABLE  
INTERMEDIATE SHELVES WITH  
FIXED TOP AND BOTTOM FOR  
A STRONG UNIT THAT DOES  
NOT REQUIRE CROSS BRACES**

**Hallowell**

**DURATECH™ PASS-THRU STEEL SHELVING**



**5-SHELF UNIT**  
3-adjustable shelves



**7-SHELF UNIT**  
5-adjustable shelves



**8-SHELF UNIT**  
6-adjustable shelves

## **DURATECH PASS-THRU STEEL SHELVING SPECIFICATIONS**

**Angle Posts:** Fabricated of 14 gauge cold rolled steel and roll formed into a modified unequal angle shape. The long leg shall have holes punched on 1-1/2" centers with 3/8" x 7/8" rectangular slots to receive shelf clip. Provide (4) Angle Posts at each unit.

**Top and bottom shelves:** Fabricated from 18 gauge cold rolled steel and are triple flanged at all four sides. All four corners are punched to allow top and bottom shelves to be securely bolted to angle posts using specially designed shoulder bolts and steel-grip nuts. Minimum four nuts and bolts per corner. Used for uniformly distributed loads up to 800 pounds.

**Heavy-Duty Intermediate Shelves:** Formed with two ribs along the horizontal front and rear edge and are stamped on the top left corner for identification. Class 1 shelves are fabricated from heavy gauge cold rolled steel and have roll formed rectangular tubular shaped front and rear edges with return bends resistance welded to the under side of shelf. Welds are spaced 3" on center to provide maximum strength. Sides are triple flanged to form a channel. All four corners are lapped and resistance welded to provide a rigid corner and add extra strength to the shelf. Top surface shall be punched for attaching Shelf Dividers from left to right on 1-1/2" centers, front and back, for 36" wide x 12", 15", 18" and 24" deep shelves. All other sizes are

punched on 3" centers. Front and rear surfaces are punched for attaching accessories. Tubular front edge is designed to protect against impact loads. Used for uniformly distributed loads up to 800 pounds. Medium-Duty intermediate shelves with capacities up to 500 pounds and Extra Heavy-Duty intermediate shelves with capacities up to 1,200 pounds are also available.

**Shelf Clips:** Shall be a one piece compression clip drawn from 13 gauge cold rolled steel and zinc plated. Fits snugly against side of post to hold shelves in place. Provide four per intermediate shelf.

**Foot Plates:** 2-1/4" x 3-1/2" x 12 gauge steel plate with angle bracket welded on top. The angle bracket is punched for fastening to front and back posts. The plate shall have a 7/16" diameter hole punched on one end for floor anchoring and be embossed on the other end for Shim Plate alignment. Provide as required for floor anchoring or when shims are required for a level installation.

**Shim Plates:** 2-1/4" x 3-1/2" x 16 gauge cold rolled sheet steel. Fabricated to fit under the Foot Plate. One end is embossed to fit into the embossment in the Foot Plate to keep them properly aligned. The other end shall have a 7/16" diameter hole to allow floor anchoring. Provide as required when shimming is required for a level installation.

**5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS**

**71**

STOCK  PROGRAM**Quick Ship**

THE FASTEST SHIPPING IN THE INDUSTRY...

**HEAVY-DUTY  
INDUSTRIAL GRADE  
STEEL SHELVING****Pass-thru Steel Shelving requires  
NO CROSS BRACES****Unique design creates  
a very strong unit!**


4 bolts at each corner top and bottom provide a very strong frame for maximum strength

**Fixed Top Shelf  
for maximum  
strength using  
a bolt and grip  
nut**

**Fully adjustable  
intermediate  
shelves  
adds versatility**

**Fixed bottom  
shelf adds more  
rigidity,  
provides closed  
base**

**All Units Include:** Four angle posts, two DuraTech bolt-in shelves to be used at unit top and bottom and intermediate adjustable shelves with shelf clips applicable to unit ordered. All DuraTech shelving units are free standing and can be joined end-to-end or back-to-back.



5-SHELF  
MODEL DT5510

**5 SHELF - 36" WIDE X 7'-3" HIGH UNITS  
3-ADJUSTABLE SHELVES**


| Model #   | W   | D   | H    | Capacity<br>Per Shelf |
|-----------|-----|-----|------|-----------------------|
| DT5510-12 | 36" | 12" | 7'3" | 800                   |
| DT5510-18 | 36" | 18" | 7'3" | 800                   |
| DT5510-24 | 36" | 24" | 7'3" | 800                   |



7-SHELF  
MODEL DT5512

**7 SHELF - 36" WIDE X 7'-3" HIGH UNITS  
5-ADJUSTABLE SHELVES**

| Model #   | W   | D   | H    | Capacity<br>Per Shelf |
|-----------|-----|-----|------|-----------------------|
| DT5512-12 | 36" | 12" | 7'3" | 800                   |
| DT5512-18 | 36" | 18" | 7'3" | 800                   |
| DT5512-24 | 36" | 24" | 7'3" | 800                   |



8-SHELF  
MODEL DT5513

**8 SHELF - 36" WIDE X 7'-3" HIGH UNITS  
6-ADJUSTABLE SHELVES**


| Model #   | W   | D   | H    | Capacity<br>Per Shelf |
|-----------|-----|-----|------|-----------------------|
| DT5513-12 | 36" | 12" | 7'3" | 800                   |
| DT5513-18 | 36" | 18" | 7'3" | 800                   |
| DT5513-24 | 36" | 24" | 7'3" | 800                   |



# ONE-TIME INVESTMENT, LIFETIME OF USE!

# Hallowell®

DURATECH™ PASS-THRU STEEL SHELVING



Top and bottom shelves attach with bolts at each corner providing a strong and rigid structure



Bottom shelf is positioned to prevent debris from collecting beneath unit



Top and bottom firmly attached with steel-grip nuts for superior strength



Compression Shelf Clip for intermediate shelves



5-SHELF  
MODEL DT5710

## 5 SHELF - 48" WIDE X 7'-3" HIGH UNITS 3-ADJUSTABLE SHELVES

| Model #   | W   | D   | H    | Capacity Per Shelf |
|-----------|-----|-----|------|--------------------|
| DT5710-12 | 48" | 12" | 7'3" | 400                |
| DT5710-18 | 48" | 18" | 7'3" | 450                |
| DT5710-24 | 48" | 24" | 7'3" | 500                |



7-SHELF  
MODEL DT5712

## 7 SHELF - 48" WIDE X 7'-3" HIGH UNITS 5-ADJUSTABLE SHELVES

| Model #   | W   | D   | H    | Capacity Per Shelf |
|-----------|-----|-----|------|--------------------|
| DT5712-12 | 48" | 12" | 7'3" | 400                |
| DT5712-18 | 48" | 18" | 7'3" | 450                |
| DT5712-24 | 48" | 24" | 7'3" | 500                |



8-SHELF  
MODEL DT5713

## 8 SHELF - 48" WIDE X 7'-3" HIGH UNITS 6-ADJUSTABLE SHELVES

| Model #   | W   | D   | H    | Capacity Per Shelf |
|-----------|-----|-----|------|--------------------|
| DT5713-12 | 48" | 12" | 7'3" | 400                |
| DT5713-18 | 48" | 18" | 7'3" | 450                |
| DT5713-24 | 48" | 24" | 7'3" | 500                |

## DURATECH ANGLE POSTS

- Roll formed into a unique angle shape for maximum strength
- The long leg is punched on 1-1/2" centers to allow independent shelf adjustment
- Four Angle Posts are used per section allowing units to be individually located, bolted side-by-side or bolted back-to-back.



## DURATECH ONE PIECE SHELF CLIP

- Each intermediate shelf requires four sturdy and compact clips
- Clips key snugly into post slots to hold shelves securely in place
- Provides independent positioning of intermediate shelves on 1-1/2" centers



## DURATECH HEAVY DUTY INTERMEDIATE SHELVES

- Tubular flange front and rear for greater strength
- Exclusive triple bend side flanges for added strength
- Lapped and welded corners
- Available in three load capacity classes up to 48" wide spans and 36" depths
- Top of shelf is punched to accept shelf dividers
- Uses four one piece shelf clips per shelf



## DURATECH TOP/BOTTOM SHELVES

- Triple flanged at all four sides for maximum rigidity, durability and stability
- Bottom shelf is positioned to close space to floor preventing debris from collecting beneath
- Bolted to angle posts at all four corners using special bolts and steel-grip nuts preventing unit sway without the use of intrusive sway bracing for complete 4-sided access



All units shown include Hallowell heavy-duty intermediate shelves. Medium-Duty and Extra Heavy-Duty units are also available.

5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS

73

STOCK → PROGRAM

**Quick Ship**

THE FASTEST SHIPPING IN THE INDUSTRY...

**BOLTLESS  
SHELVING UNITS****RIVETWELL™****Boltless shelving is designed to maximize storage space and minimize installation set-up time.**

All components are engineered to attach snugly to one another without the use of loose fasteners. This unique design has rivets which are factory attached to all left-to-right and front-to-back beams. The rivets align with keyhole slots in the vertical posts. Once tapped into place using a standard rubber mallet, the units are tightly assembled providing maximum strength.

Standard units consist of vertical angle posts at the corners, double rivet angle beams at the top and bottom perimeter and single rivet angle beams running left-to-right only at the intermediate levels. Shelves are of standard 5/8" particle board, EZ-Deck steel or wire decking and simply drop into place. Shelf strength can be increased by upgrading to heavy duty beams, adding single rivet beams running front-to-back at the intermediate levels, upgrading to double rivet beams at the full perimeter of the intermediate levels or upgrading all levels to our strongest double rivet channel beams. Optional center supports can be added using supplied hardware to increase decking capacity.



Double Rivet unit with 5 levels



Single Rivet unit with 4 levels

Double Rivet unit with 4 levels

**The versatility of our Rivetwell boltless shelving system allows you to mix and match components to meet your unique application. From standard storage applications, record storage to automotive tire racks, Rivetwell boltless shelving is your storage solution.**

**COLOR  
SELECTION**729  
PARCHMENT (PT)

# BOLTLESS SHELVING COMPONENTS


# Hallowell®

RIVETWELL™ SHELVING

**1** Angle Post



**2** T-Post

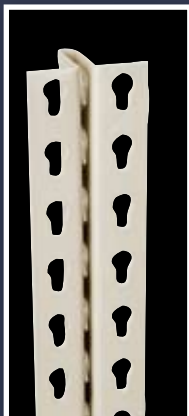


**3** Single Rivet Shelf Beam



**4** Double Rivet Angle Beam




**5** Double Rivet Channel Beam



**6** Center Support



**7** Double Rivet Z-Beam (Standard Duty)



**8** Double Rivet Z-Beam (Heavy Duty)



**9** Z-Beam Center Support

**1** **Angle Post (Standard Duty):** 1-1/2" x 1-1/2" x 14 gauge cold rolled steel corner post uprights. Perfect for standard load situations.

**Angle Post (Heavy Duty):** Shall be 1-7/8" x 1-7/8" x 14 gauge cold rolled steel uprights. The choice when heavy duty shelving is required. Perfect for multilevel installations.

**2** **T-Post (Standard Duty):** 3" x 1-7/8" x 14 gauge cold rolled steel intermediate uprights.

**T-Post (Heavy Duty):** 3-3/4" x 1-7/8" x 14 gauge cold rolled steel intermediate uprights.

**3** **Single Rivet Shelf Beam (Standard Duty):** This 14 gauge low profile standard intermediate level shelf beam is perfect when maximum clear opening is required between shelf levels.

**Single Rivet Shelf Beam (Heavy Duty):** An 11 gauge heavy duty version of our low profile intermediate shelf beam allowing maximum clear opening between shelf levels.

**4** **Double Rivet Angle Beam (Standard Duty):** This 16 gauge shelf beam is essential for stability of standard units; therefore, is used on all four sides at the top and bottom levels. Can also be used front and back or on all four sides of intermediate levels to increase unit stability and load capacity.

**Double Rivet Angle Beam (Heavy Duty):** An upgrade to our standard duty double rivet angle beams, our heavy duty double rivet angle beams provide additional unit rigidity and even higher shelf capacity.

**5** **Double Rivet Channel Beam:** Maximized left-to-right shelf capacity is achieved using our 14 gauge double rivet channel beams in lieu of double rivet angle beams. These beams cannot be used at the bottom level.

**6** **Center Support:** Used to provide additional shelf support front-to-back by bolting between double rivet beams at prepunched locations. Ideal for wider spans.

**7** **Double Rivet Z-Beam (Standard Duty):** For 12" thru 60" beams. Used in place of double rivet angle beams to add 1" additional clearance between shelf levels. Allows particle board decking to sit flush with beam. Protects decking edges. When used at bottom level of single rivet units, shelf clearance is increased by 1" at lower level. Standard Z beams are 14 gauge.

**8** **Double Rivet Z-Beam (Heavy Duty):** For 69" and 72" beams. Used in place of double rivet angle beams to add 1" additional clearance between shelf levels. Allows particle board decking to sit flush with beam. Protects decking edges. Heavy-Duty Z beams are 14 gauge.

**9** **Center Support for Z-Beam:** Used with Z-Beams for front to back decking support. Fabricated of 11 gauge cold rolled steel.

5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS


75

**STOCK** → **PROGRAM**
**THE FASTEST SHIPPING IN THE INDUSTRY...**

# BOLTLESS SHELVING UNITS


## UNIT GROWTH CHART

When designing a shelving layout, Unit growth must be considered. To determine the overall dimension of a continuous row of shelving employing T-Posts or Angle Posts with tie plates, refer to the table below.

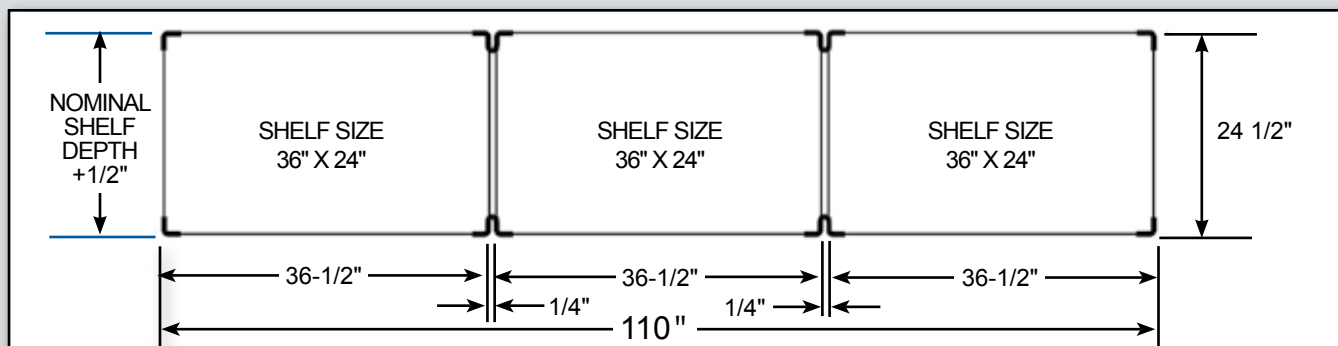


## UNIT CLEAR WIDTH

Examples below are based on 36" wide shelf.

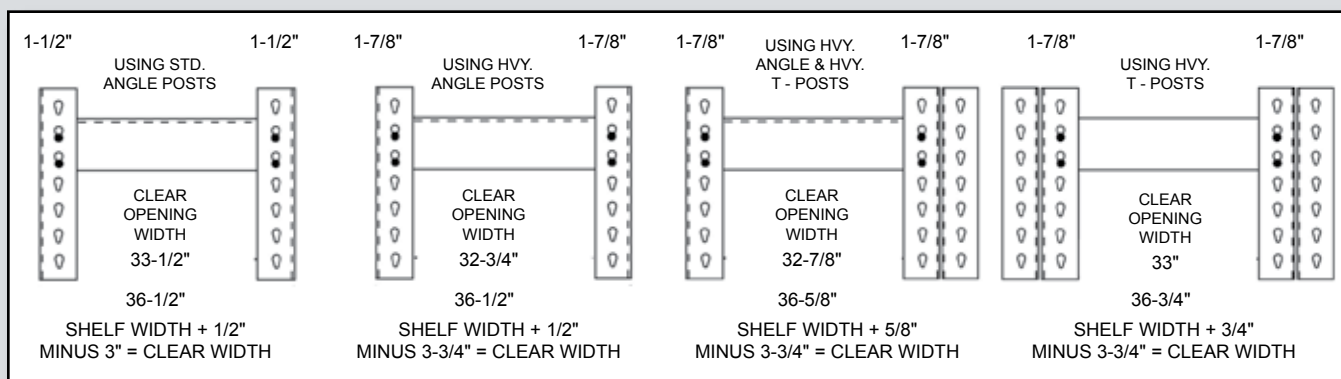


## VERTICAL SHELF CLEARANCE FOR SINGLE RIVET UNITS

This chart depicts shelf clearances for typical rivetwell shelving units with 1-1/2" vertical shelf adjustment

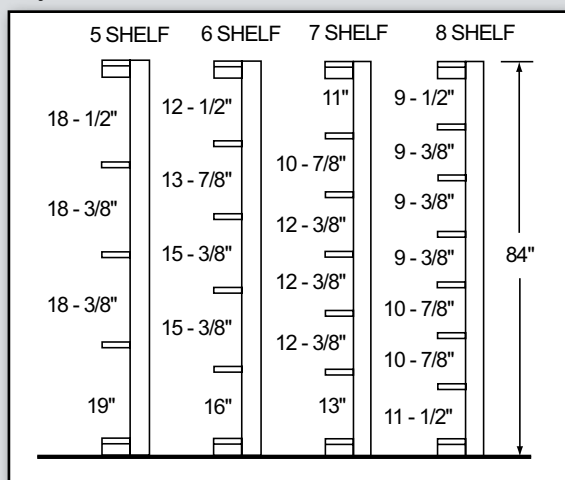

## VERTICAL SHELF CLEARANCE FOR DOUBLE RIVET UNITS

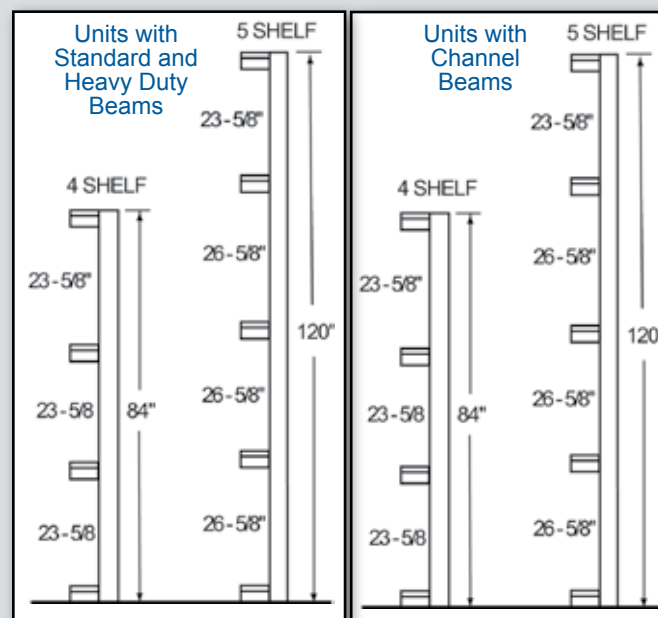

# SINGLE RIVET SHELVING UNITS 84" HIGH

# Hallowell

RIVETWELL™ SHELVING

| SINGLE RIVET UNITS - 84" HIGH |       |                |                   |                        |                |                   |                 |
|-------------------------------|-------|----------------|-------------------|------------------------|----------------|-------------------|-----------------|
| 36" Wide Units                |       |                |                   | 48" Wide Units         |                |                   |                 |
| (Decking not included)        |       |                |                   | (Decking not included) |                |                   |                 |
| Levels                        | Depth | Shelf Capacity | Starter Model No. | Adder Model No.        | Shelf Capacity | Starter Model No. | Adder Model No. |
|                               | 12    | 350            | SRS361284-5S      | SRS361284-5A           | 250            | SRS481284-5S      | SRS481284-5A    |
|                               | 18    | 350            | SRS361884-5S      | SRS361884-5A           | 250            | SRS481884-5S      | SRS481884-5A    |
|                               | 24    | 350            | SRS362484-5S      | SRS362484-5A           | 250            | SRS482484-5S      | SRS482484-5A    |
|                               | 30    | 350            | SRS363084-5S      | SRS363084-5A           | 250            | SRS483084-5S      | SRS483084-5A    |
|                               | 36    | 350            | SRS363684-5S      | SRS363684-5A           | 250            | SRS483684-5S      | SRS483684-5A    |
| 6 Shelf                       | 12    | 350            | SRS361284-6S      | SRS361284-6A           | 250            | SRS481284-6S      | SRS481284-6A    |
| Units                         | 18    | 350            | SRS361884-6S      | SRS361884-6A           | 250            | SRS481884-6S      | SRS481884-6A    |
|                               | 24    | 350            | SRS362484-6S      | SRS362484-6A           | 250            | SRS482484-6S      | SRS482484-6A    |
|                               | 30    | 350            | SRS363084-6S      | SRS363084-6A           | 250            | SRS483084-6S      | SRS483084-6A    |
|                               | 36    | 350            | SRS363684-6S      | SRS363684-6A           | 250            | SRS483684-6S      | SRS483684-6A    |
| 7 Shelf                       | 12    | 350            | SRS361284-7S      | SRS361284-7A           | 250            | SRS481284-7S      | SRS481284-7A    |
| Unit                          | 18    | 350            | SRS361884-7S      | SRS361884-7A           | 250            | SRS481884-7S      | SRS481884-7A    |
|                               | 24    | 350            | SRS362484-7S      | SRS362484-7A           | 250            | SRS482484-7S      | SRS482484-7A    |
|                               | 30    | 350            | SRS363084-7S      | SRS363084-7A           | 250            | SRS483084-7S      | SRS483084-7A    |
|                               | 36    | 350            | SRS363684-7S      | SRS363684-7A           | 250            | SRS483684-7S      | SRS483684-7A    |
| 8 Shelf                       | 12    | 350            | SRS361284-8S      | SRS361284-8A           | 250            | SRS481284-8S      | SRS481284-8A    |
| Unit                          | 18    | 350            | SRS361884-8S      | SRS361884-8A           | 250            | SRS481884-8S      | SRS481884-8A    |
|                               | 24    | 350            | SRS362484-8S      | SRS362484-8A           | 250            | SRS482484-8S      | SRS482484-8A    |
|                               | 30    | 350            | SRS363084-8S      | SRS363084-8A           | 250            | SRS483084-8S      | SRS483084-8A    |
|                               | 36    | 350            | SRS363684-8S      | SRS363684-8A           | 250            | SRS483684-8S      | SRS483684-8A    |

**Starter units** consist of four standard angle posts, four left-to-right standard double rivet angle beams, four front-to-back standard double rivet angle beams, two left-to-right standard single rivet beams per intermediate level and two front-to-back standard single rivet beam at one intermediate level only (30" and 36" deep units include two front-to-back single rivet beams at each intermediate level).

**Adder units** consist of two standard T-Posts, four left-to-right standard double rivet angle beams, two front-to-back standard double rivet angle beam, two left-to-right standard single rivet beam per intermediate level and one front-to-back standard single rivet beam at one intermediate level only (30" and 36" deep units include one front-to-back single rivet beam at each intermediate level).

## PARTICLE BOARD DECKING

| SIZE      | PART NO. |
|-----------|----------|
| 36" X 12" | HPB3612  |
| 36" X 18" | HPB3618  |
| 36" X 24" | HPB3624  |
| 36" X 30" | HPB3630  |
| 36" X 36" | HPB3636  |
| 48" X 12" | HPB4812  |
| 48" X 18" | HPB4818  |
| 48" X 24" | HPB4824  |
| 48" X 30" | HPB4830  |

Be sure to order one each of particle board decking per level.

**EZ-Deck steel decking can NOT be used on single rivet units.**



Standard 5-shelf single rivet unit (order decking separately)

Standard 4-shelf double rivet unit, see page 78. (order decking separately)

COLOR  
SELECTION

729 Parchment

5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS

77

**STOCK**  **PROGRAM**

# DOUBLE RIVET SHELVING UNITS

THE FASTEST SHIPPING IN THE INDUSTRY...

RIVETWELL™ SHELVING

## DOUBLE RIVET UNITS - 84" HIGH WITH 4 LEVELS

| Without Center Support<br>(Decking Not Included) |                       |       |           |                   |                 | With Center Support<br>(Decking Not Included) |                   | Decking         |                        |                       |
|--|-----------------------|-------|-----------|-------------------|-----------------|---|-------------------|-----------------|------------------------|-----------------------|
| Width  | Beam Type             | Depth | Shelf Cap | Starter Model No. | Adder Model No. | Shelf Cap                                     | Starter Model No. | Adder Model No. | Particle Board Decking | EZ-Deck Steel Decking |
| 48"  | Standard Angle Beam   | 18    | 550       | DRS481884-4S      | DRS481884-4A    | 875   | DRSC481884-4S     | DRSC481884-4A   | HPB4818                | HEZD4818              |
|  |                       | 24    | 550       | DRS482484-4S      | DRS482484-4A    | 875   | DRSC482484-4S     | DRSC482484-4A   | HPB4824                | HEZD4824              |
|  |                       | 30    | 550       | DRS483084-4S      | DRS483084-4A    | 825   | DRSC483084-4S     | DRSC483084-4A   | HPB4830                | HEZD4830              |
|  |                       | 36    | 550       | DRS483684-4S      | DRS483684-4A    | 775   | DRSC483684-4S     | DRSC483684-4A   | HPB4836                | HEZD4836              |
|  |                       | 48    | 550       | DRS484884-4S      | DRS484884-4A    | 700   | DRSC484884-4S     | DRSC484884-4A   | HPB4848                | HEZD4848              |
| 48"  | Heavy-Duty Angle      | 18    | 750       | DRH481884-4S      | DRH481884-4A    | 1400  | DRHC481884-4S     | DRHC481884-4A   | HPB4818                | HEZD4818              |
|  |                       | 24    | 750       | DRH482484-4S      | DRH482484-4A    | 1400  | DRHC482484-4S     | DRHC482484-4A   | HPB4824                | HEZD4824              |
|  |                       | 30    | 750       | DRH483084-4S      | DRH483084-4A    | 1310  | DRHC483084-4S     | DRHC483084-4A   | HPB4830                | HEZD4830              |
|  |                       | 36    | 750       | DRH483684-4S      | DRH483684-4A    | 1220  | DRHC483684-4S     | DRHC483684-4A   | HPB4836                | HEZD4836              |
|  |                       | 48    | 750       | DRH484884-4S      | DRH484884-4A    | 1125  | DRHC484884-4S     | DRHC484884-4A   | HPB4848                | HEZD4848              |
| 60"  | Heavy-Duty Angle Beam | 18    | 600       | DRH601884-4S      | DRH601884-4A    | 1200  | DRHC601884-4S     | DRHC601884-4A   | HPB6018                | HEZD6018              |
|  |                       | 24    | 600       | DRH602484-4S      | DRH602484-4A    | 1200  | DRHC602484-4S     | DRHC602484-4A   | HPB6024                | HEZD6024              |
|  |                       | 30    | 600       | DRH603084-4S      | DRH603084-4A    | 1200  | DRHC603084-4S     | DRHC603084-4A   | HPB6030                | HEZD6030              |
|  |                       | 36    | 600       | DRH603684-4S      | DRH603684-4A    | 1200  | DRHC603684-4S     | DRHC603684-4A   | HPB6036                | HEZD6036              |
|  |                       | 48    | 600       | DRH604884-4S      | DRH604884-4A    | 1200  | DRHC604884-4S     | DRHC604884-4A   | HPB6048                | HEZD6048              |
| 60"  | Channel Beam          | 18    | -         | -                 | -               | 2000  | DRCC601884-4S     | DRCC601884-4A   | HPB6018                | HEZD6018              |
|  |                       | 24    | -         | -                 | -               | 2000  | DRCC602484-4S     | DRCC602484-4A   | HPB6024                | HEZD6024              |
|  |                       | 30    | -         | -                 | -               | 2000  | DRCC603084-4S     | DRCC603084-4A   | HPB6030                | HEZD6030              |
|  |                       | 36    | -         | -                 | -               | 2000  | DRCC603684-4S     | DRCC603684-4A   | HPB6036                | HEZD6036              |
|  |                       | 48    | -         | -                 | -               | 2000  | DRCC604884-4S     | DRCC604884-4A   | HPB6048                | HEZD6048              |
| 72"  | Heavy-Duty Angle Beam | 18    | 500       | DRH721884-4S      | DRH721884-4A    | 1000  | DRHC721884-4S     | DRHC721884-4A   | HPB7218                | HEZD7218              |
|  |                       | 24    | 500       | DRH722484-4S      | DRH722484-4A    | 1000  | DRHC722484-4S     | DRHC722484-4A   | HPB7224                | HEZD7224              |
|  |                       | 30    | 500       | DRH723084-4S      | DRH723084-4A    | 1000  | DRHC723084-4S     | DRHC723084-4A   | HPB7230                | HEZD7230              |
|  |                       | 36    | 500       | DRH723684-4S      | DRH723684-4A    | 1000  | DRHC723684-4S     | DRHC723684-4A   | HPB7236                | HEZD7236              |
|  |                       | 48    | 500       | DRH724884-4S      | DRH724884-4A    | 1000  | DRHC724884-4S     | DRHC724884-4A   | HPB7248                | HEZD7248              |
| 72"  | Channel Beam          | 18    | -         | -                 | -               | 1850  | DRCC721884-4S     | DRCC721884-4A   | HPB7218                | HEZD7218              |
|  |                       | 24    | -         | -                 | -               | 1850  | DRCC722484-4S     | DRCC722484-4A   | HPB7224                | HEZD7224              |
|  |                       | 30    | -         | -                 | -               | 1850  | DRCC723084-4S     | DRCC723084-4A   | HPB7230                | HEZD7230              |
|  |                       | 36    | -         | -                 | -               | 1850  | DRCC723684-4S     | DRCC723684-4A   | HPB7236                | HEZD7236              |
|  |                       | 48    | -         | -                 | -               | 1850  | DRCC724884-4S     | DRCC724884-4A   | HPB7248                | HEZD7248              |
| 96"  | Heavy-Duty Angle Beam | 18    | -         | -                 | -               | 620   | DRHC961884-4S     | DRHC961884-4A   | HPB9618                | HEZD9618              |
|  |                       | 24    | -         | -                 | -               | 620   | DRHC962484-4S     | DRHC962484-4A   | HPB9624                | HEZD9624              |
|  |                       | 30    | -         | -                 | -               | 620   | DRHC963084-4S     | DRHC963084-4A   | HPB9630                | HEZD9630              |
|  |                       | 36    | -         | -                 | -               | 620   | DRHC963684-4S     | DRHC963684-4A   | HPB9636                | HEZD9636              |
|  |                       | 48    | -         | -                 | -               | 620   | DRHC964884-4S     | DRHC964884-4A   | HPB9648                | HEZD9648              |
| 96"  | Channel Beam          | 18    | -         | -                 | -               | 1400  | DRCC961884-4S     | DRCC961884-4A   | HPB9618                | HEZD9618              |
|  |                       | 24    | -         | -                 | -               | 1400  | DRCC962484-4S     | DRCC962484-4A   | HPB9624                | HEZD9624              |
|  |                       | 30    | -         | -                 | -               | 1400  | DRCC963084-4S     | DRCC963084-4A   | HPB9630                | HEZD9630              |
|  |                       | 36    | -         | -                 | -               | 1400  | DRCC963684-4S     | DRCC963684-4A   | HPB9636                | HEZD9636              |
|  |                       | 48    | -         | -                 | -               | 1400  | DRCC964884-4S     | DRCC964884-4A   | HPB9648                | HEZD9648              |

## DOUBLE RIVET UNITS - 120" HIGH WITH 5 LEVELS

|     |                       |    |     |               |               |      |                |                |         |          |
|-----|-----------------------|----|-----|---------------|---------------|------|----------------|----------------|---------|----------|
| 72" | Heavy-Duty Angle Beam | 30 | 500 | DRH7230120-5S | DRH7230120-5A | 1000 | DRHC7230120-5S | DRHC7230120-5A | HPB7230 | HEZD7230 |
|     |                       | 36 | 500 | DRH7236120-5S | DRH7236120-5A | 1000 | DRHC7236120-5S | DRHC7236120-5A | HPB7236 | HEZD7236 |
|     |                       | 48 | 500 | DRH7248120-5S | DRH7248120-5A | 1000 | DRHC7248120-5S | DRHC7248120-5A | HPB7248 | HEZD7248 |
| 72" | Channel Beam          | 30 | -   | -             | -             | 1490 | DRCC7230120-5S | DRCC7230120-5A | HPB7230 | HEZD7230 |
|     |                       | 36 | -   | -             | -             | 1490 | DRCC7236120-5S | DRCC7236120-5A | HPB7236 | HEZD7236 |
|     |                       | 48 | -   | -             | -             | 1490 | DRCC7248120-5S | DRCC7248120-5A | HPB7248 | HEZD7248 |
| 96" | Heavy-Duty Angle Beam | 30 | -   | -             | -             | 620  | DRHC9630120-5S | DRHC9630120-5A | HPB9630 | HEZD9630 |
|     |                       | 36 | -   | -             | -             | 620  | DRHC9636120-5S | DRHC9636120-5A | HPB9636 | HEZD9636 |
|     |                       | 48 | -   | -             | -             | 620  | DRHC9648120-5S | DRHC9648120-5A | HPB9648 | HEZD9648 |
| 96" | Channel Beam          | 30 | -   | -             | -             | 1400 | DRCC9630120-5S | DRCC9630120-5A | HPB9630 | HEZD9630 |
|     |                       | 36 | -   | -             | -             | 1400 | DRCC9636120-5S | DRCC9636120-5A | HPB9636 | HEZD9636 |
|     |                       | 48 | -   | -             | -             | 1400 | DRCC9648120-5S | DRCC9648120-5A | HPB9648 | HEZD9648 |

**Starter units** consist of four standard angle posts, \*two left-to-right standard double rivet angle/channel beams per level and two front-to-back standard double rivet angle beams per level.

**Adder units** consist of two standard T-Posts, \*two left-to-right standard double rivet angle/channel beams per level and two front-to-back standard double rivet angle beams per level. \*Channel beam units are provided with left-to-right double rivet angle beams at bottom level.

# RECORD STORAGE UNITS

# Hallowell

RIVETWELL™ SHELVING

| RECORD STORAGE UNITS |       |        |        |              |                   |                 |                        |                       |
|----------------------|-------|--------|--------|--------------|-------------------|-----------------|------------------------|-----------------------|
| Width                | Depth | Height | Levels | No. of boxes | Starter Model No. | Adder Model No. | Particle Board Decking | EX-Deck Steel Decking |
| 42"                  | 15"   | 60"    | 3      | 18           | RS421560-3S       | RS421560-3A     | HPB4215                | HEZD4215              |
|                      | 30"   | 60"    | 3      | 36           | RS423060-3S       | RS423060-3A     | HPB4230                | HEZD4230              |
| 69"                  | 15"   | 60"    | 3      | 30           | RS691560-3S       | RS691560-3A     | HPB6915                | HEZD6915              |
|                      | 30"   | 60"    | 3      | 60           | RS693060-3S       | RS693060-3A     | HPB6930                | HEZD6930              |
| 42"                  | 15"   | 84"    | 4      | 24           | RS421584-4S       | RS421584-4A     | HPB4215                | HEZD4215              |
|                      | 30"   | 84"    | 4      | 48           | RS423084-4S       | RS423084-4A     | HPB4230                | HEZD4230              |
| 69"                  | 15"   | 84"    | 4      | 40           | RS691584-4S       | RS691584-4A     | HPB6915                | HEZD6915              |
|                      | 30"   | 84"    | 4      | 80           | RS693084-4S       | RS693084-4A     | HPB6930                | HEZD6930              |
| 42"                  | 15"   | 108"   | 5      | 30           | RS4215108-5S      | RS4215108-5A    | HPB4215                | HEZD4215              |
|                      | 30"   | 108"   | 5      | 60           | RS4230108-5S      | RS4230108-5A    | HPB4230                | HEZD4230              |
| 69"                  | 15"   | 108"   | 5      | 50           | RS6915108-5S      | RS6915108-5A    | HPB6915                | HEZD6915              |
|                      | 30"   | 108"   | 5      | 100          | RS6930108-5S      | RS6930108-5A    | HPB6930                | HEZD6930              |

Be sure to order one each of particle board or EZ-Deck steel decking per level.

\*The above units do not include record storage boxes.

**Hallowell Record Storage Boxes** are 12"w x 15"d x 10"h and are constructed of 200# test white corrugated. Includes double thickness bottoms and reinforced carry handles. Must be ordered in lots of 20.



#### RECORD STORAGE BOXES

Catalog No. Qty. Per Carton  
HRSB 20

#### ACCESS UNIT FROM FRONT OR BACK!



Record Storage Unit with 4 levels (80 Box unit)

COLOR SELECTION

729 Parchment

5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS

79

STOCK → PROGRAM


**Quick Ship**

THE FASTEST SHIPPING IN THE INDUSTRY...

**AUTOMOTIVE STORAGE  
RACKS AND UNITS****TIRE STORAGE RACKS**

| Width             | Depth | Height | Levels | *Tire Capacity | Starter Model No.      | Adder Model No.        |
|-------------------|-------|--------|--------|----------------|------------------------|------------------------|
| <b>SINGLE ROW</b> |       |        |        |                |                        |                        |
| 60"               | 21"   | 84"    | 3      | 24             | <b>TSS602184-3S</b>    | <b>TSS602184-3A</b>    |
|                   | 21"   | 120"   | 4      | 32             | <b>TSS6021120-4S</b>   | <b>TSS6021120-4A</b>   |
|                   | 21"   | 144"   | 5      | 40             | <b>TSS6021144-5S</b>   | <b>TSS6021144-5A</b>   |
|                   | 21"   | 192"   | 6      | 48             | <b>TSS6021192-6S**</b> | <b>TSS6021192-6A**</b> |
| <b>DOUBLE ROW</b> |       |        |        |                |                        |                        |
| 60"               | 42"   | 84"    | 3      | 48             | <b>TSD602184-3S</b>    | <b>TSD602184-3A</b>    |
|                   | 42"   | 120"   | 4      | 64             | <b>TSD6021120-4S</b>   | <b>TSD6021120-4A</b>   |
|                   | 42"   | 144"   | 5      | 80             | <b>TSD6021144-5S</b>   | <b>TSD6021144-5A</b>   |
|                   | 42"   | 192"   | 6      | 96             | <b>TSD6021192-6S**</b> | <b>TSD6021192-6A**</b> |

(\*)Based on average passenger tire (\*\*) Supplied with heavy-duty posts

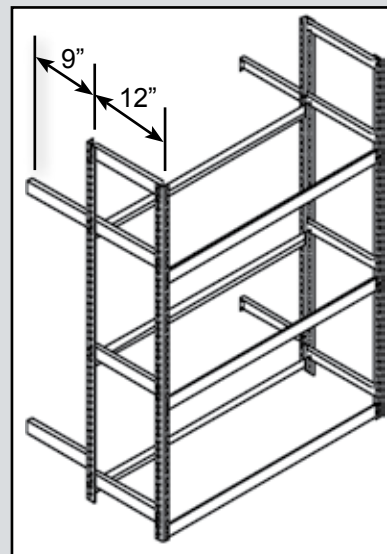

Tire Storage Rack


**MUFFLER STORAGE UNITS**

| Width | Depth | Height | Levels | Starter Model No.  | Adder Model No.    | Particle Board Decking |                |
|-------|-------|--------|--------|--------------------|--------------------|------------------------|----------------|
|       |       |        |        |                    |                    | Size                   | Part No.       |
| 48"   | 36"   | 84"    | 5      | <b>MS483684-5S</b> | <b>MS483684-5A</b> | 48" X 36"              | <b>HPB4836</b> |
| 96"   | 36"   | 84"    | 5      | <b>MS963684-5S</b> | <b>MS963684-5A</b> | 96" X 36"              | <b>HPB9636</b> |

Be sure to order one each of particle board decking per level.

**HANGING TAILPIPE RACK**

| Width | Depth | Height | Starter Model No. |
|-------|-------|--------|-------------------|
| 48"   | 18"   | 120"   | <b>HTP4818120</b> |
| 96"   | 18"   | 120"   | <b>HTP9618120</b> |

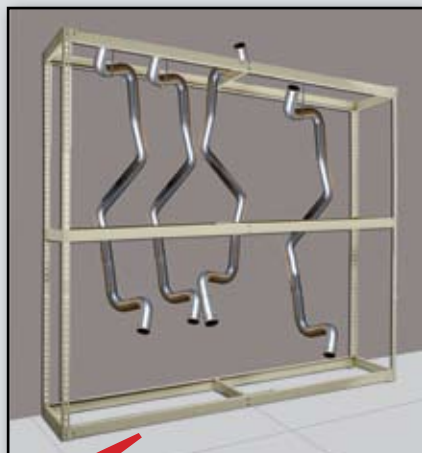

Hanging Tailpipe Rack



Tire Rack



Muffler Storage Rack


**COLOR  
SELECTION**

729 Parchment

# RIVETWELL SHELVING COMPONENTS


# Hallowell

| PART DESCRIPTION                              | HEIGHT | STANDARD PART NO.       | HEAVY-DUTY PART NO.     |
|---|--------|-------------------------|-------------------------|
| <b>ANGLE POST</b>                             |        | 1-1/2" x 1-1/2" (14 ga) | 1-7/8" x 1-7/8" (14 ga) |
| Punched for self adjustment on 1-1/2" centers | 3'     | APS03                   | -                       |
|   | 4'     | APS04                   | -                       |
|   | 5'     | APS05                   | -                       |
|   | 6'     | APS06                   | APH06                   |
|   | 7'     | APS07                   | APH07                   |
|   | 8'     | APS08                   | APH08                   |
|   | 9'     | APS09                   | APH09                   |
|   | 10'    | APS10                   | APH10                   |
|   | 12'    | APS12                   | APH12                   |
|   | 14'    | APS14                   | APH14                   |
|   | 16'    | APS16                   | APH16                   |




**Note:** For requirements above 16'-0" high, multiple posts can be spliced using PS05 post splice without compromising capacity.

| PART DESCRIPTION                              | HEIGHT | STANDARD PART NO.   | HEAVY-DUTY PART NO.     |
|---|--------|---------------------|-------------------------|
| <b>T-POST</b>                                 |        | 3" x 1-7/8" (14 ga) | 3-3/4" x 1-7/8" (14 ga) |
| Punched for self adjustment on 1-1/2" centers | 3'     | TPS03               | TPH03                   |
|   | 4'     | TPS04               | TPH04                   |
|   | 5'     | TPS05               | TPH05                   |
|   | 6'     | TPS06               | TPH06                   |
|   | 7'     | TPS07               | TPH07                   |
|   | 8'     | TPS08               | TPH08                   |
|   | 9'     | TPS09               | TPH09                   |
|   | 10'    | TPS10               | TPH10                   |
|   | 12'    | TPS12               | TPH12                   |
|   | 14'    | TPS14               | TPH14                   |
|   | 16'    | TPS16               | TPH16                   |



**Note:** For requirements above 16'-0" high, multiple posts can be spliced using PS05 post splice without compromising capacity.


| PART DESCRIPTION                              | LENGTH | STANDARD PART NO.   | HEAVY-DUTY PART NO. |
|---|--------|---------------------|---------------------|
| <b>DOUBLE RIVET ANGLE BEAM</b>                |        | 2-3/4" x 1" (16 ga) | 2-3/4" x 1" (14 ga) |
| Punched for self adjustment on 1-1/2" centers | 2"     | ABS12               | -                   |
|   | 15"    | ABS15               | -                   |
|   | 18"    | ABS18               | -                   |
|   | 24"    | ABS24               | -                   |
|   | 30"    | ABS30               | -                   |
|   | 32"    | ABS32               | -                   |
|   | 36"    | ABS36               | -                   |
|   | 42"    | ABS42               | -                   |
|   | 48"    | -                   | ABH48               |
|   | 60"    | -                   | ABH60               |
|   | 69"    | -                   | ABH69               |
|   | 72"    | -                   | ABH72               |
|   | 84"    | -                   | ABH84               |
|   | 96"    | -                   | ABH96               |



For left to right shelf and front to back shelf support. "R" is for beams punched to accept record storage box support


Denotes Stock Component

| PART DESCRIPTION   | LENGTH | STANDARD PART NO. | HEAVY-DUTY PART NO. |
|--|--------|-------------------|---------------------|
| <b>DOUBLE RIVET CHANNEL BEAM</b>   |        |                   | 1" x 2-3/4" (14 ga) |
| For left to right shelf support. Provides for a higher capacity than heavy-duty rivet angle beams. | 48"    | -                 | CBH48               |
|  | 60"    | -                 | CBH60               |
|  | 69"    | -                 | CBH69               |
|  | 72"    | -                 | CBH72               |
|  | 84"    | -                 | CBH84               |
|  | 96"    | -                 | CBH96               |




**Note:** When a bottom shelf is required to be at the bottom level, use a Heavy-Duty Double Rivet Angle Beam.


| PART DESCRIPTION   | LENGTH | STANDARD PART NO.   | HEAVY-DUTY PART NO. |
|--|--------|---------------------|---------------------|
| <b>SINGLE RIVET BEAM</b>   |        | 1" x 21/32" (14 ga) | 1" x 21/32" (11 ga) |
| For use as left to right and front to back support. See Beam Load Table for capacity on page 73. | 12"    | SRBS12              | -                   |
|  | 15"    | SRBS15              | -                   |
|  | 18"    | SRBS18              | -                   |
|  | 24"    | SRBS24              | -                   |
|  | 30"    | SRBS30              | -                   |
|  | 36"    | SRBS36              | SRBH36              |
|  | 42"    | SRBS42              | SRBH42              |
|  | 48"    | SRBS48              | SRBH48              |



| PART DESCRIPTION  | LENGTH | STANDARD PART NO.        | HEAVY-DUTY PART NO. |
|---|--------|--------------------------|---------------------|
| <b>CENTER SUPPORT</b>   |        | 2-3/4" x 1" x 1" (16 ga) |                     |
| Bolts to double rivet angle or channel beams to add support to decking and stabilize beams. Supplied with nuts and bolts for fast assembly. Use 1 per pair of beams up to 84", 2 per pair of 96" beams. | 12"    | CS12                     | -                   |
|   | 15"    | CS15                     | -                   |
|   | 18"    | CS18                     | -                   |
|   | 24"    | CS24                     | -                   |
|   | 30"    | CS30                     | -                   |
|   | 32"    | CS32                     | -                   |
|   | 36"    | CS36                     | -                   |
|   | 42"    | CS42                     | -                   |
|   | 48"    | CS48                     | -                   |



| PART DESCRIPTION  | LENGTH  | STANDARD PART NO.     | HEAVY-DUTY PART NO. |
|---|---------|-----------------------|---------------------|
| <b>DOUBLE ROW AND TOP TIE</b>   |         | 2-1/2" x 1/4" (14 ga) |                     |
| Use to space back-to-back units and to top-tie rows across aisle for added stability. | 9-1/4"  | -                     | DRTT09              |
|   | 12-1/4" | -                     | DRTT12              |
|   | 15-1/4" | -                     | DRTT15              |
|   | 18-1/4" | -                     | DRTT18              |
|   | 24-1/4" | -                     | DRTT24              |
|   | 36-1/4" | -                     | DRTT36              |
|   | 42-1/4" | -                     | DRTT42              |
|   | 48-1/4" | -                     | DRTT48              |








COLOR SELECTION








729 Parchment

STOCK  PROGRAM

THE FASTEST SHIPPING IN THE INDUSTRY...

RIVETWELL SHELVING  
COMPONENTS

| PART DESCRIPTION   | LENGTH     | STANDARD PART NO.   | HEAVY-DUTY PART NO. |
|--|------------|---|---------------------|
| <b>WALL TIE</b> 2-1/2" x 1-1/4" (14 ga)  |            |   |                     |
| Used to secure units to wall and provide space between wall and unit (Hardware to attach to wall not included).  | 9-1/4"     | WT09<br>             | -                   |
| <b>FOOT PLATE</b> 1-1/2" x 1-1/2" x 3" (14 ga)   |            |   |                     |
| For use in anchoring angle and tee posts to floor. (Hardware included for attaching posts-Hardware to anchor to the floor not included.) anchor holes are 3/8" diameter. | 3"         | FPR100<br>           | -                   |
| <b>POST SPLICE</b> 1-3/8" x 1-3/8" x 5" (11 ga)  |            |   |                     |
| Used to extend post, attaches to outside of post. Order one per Angle Post, two per T-Post.  | 5"         | PS05<br>            | -                   |
| <b>TIE PLATE</b> 3" x 3" (14 ga)   |            |   |                     |
| Used for structural integrity of T-Post and to join Angle Post units side by side to insure proper row alignment.  | NA         | TP1<br>            | -                   |
| <b>TIRE RACK BEAM</b> 2-3/4" x 1" (14 ga)  |            |   |                     |
| For left to right shelf support of tires. 9 degrees angle on supporting edge.  | 48"<br>60" | TRB48<br>TRB60<br> | -                   |


| PART DESCRIPTION  | LENGTH                          | STANDARD PART NO.   | HEAVY-DUTY PART NO.   |
|---|---------------------------------|---|---|
| <b>HANGER BAR</b> 1-1/4" x 1-1/4" x 1-1/4" (14 ga)  |                                 |   |   |
| For hanging items between double rivet beams. One or more may be used per level.  | 36"<br>42"<br>48"<br>60"        | HB 36<br>HB 42<br>HB 48<br>HB 60  | -<br>-<br>-<br>-  |
|   |                                 |   |   |
| <b>DECK OVER GRATING SUPPORT</b> 3-1/2" x 1-13/16" x 2-3/16" (11 ga)  |                                 |   |   |
| Provides secure support for grating when decking over entire installation.  | 36"<br>48"<br>60"<br>69"<br>72" | -<br>-<br>-<br>-<br>-   | DOGS36<br>DOGS48<br>DOGS60<br>DOGS69<br>DOGS72  |
|   |                                 |   |   |
| <b>DOWN ISLE GRATING SUPPORT</b> 3-1/2" x 1-13/16" x 1-15/16" (11 ga)   |                                 |   |   |
| Attaches to unit front between rows to provide support for grating on 2-level rivetwell installations. For maximum aisle width of 48". Use a minimum of 3 screws per support. 9 degree angle on top edge. | 36"<br>48"<br>60"<br>69"<br>72" | -<br>-<br>-<br>-<br>-   | DOGS36<br>DOGS48<br>DOGS60<br>DOGS69<br>DOGS72  |
|    |                                 |   |   |
| PART DESCRIPTION  | LENGTH                          | LEFT STANDARD PART NO.  | RIGHT HEAVY-DUTY PART NO.   |
| <b>BEAM CLEAT</b> 1-1/2" x 1"-1/2" x 3" (14 ga)   |                                 |   |   |
| An economical way to add units. Not recommended for heavy loads.  | 3"                              | BC-L  | BC-R  |
|   |                                 |  |  |
| <b>SLOTTED ANGLE CLEAT</b> 1-1/2" x 1"-1/2" x 3" (14 ga)  |                                 |   |   |
| For use where slotted angle pieces must be joined, such as special grating supports and top ties.   | 3"                              | SAC-L   | SAC-R   |
|   |                                 |  |  |


Denotes Stock Component


# RIVETWELL SHELVING COMPONENTS


# Hallowell

RIVETWELL™ SHELVING COMPONENTS

| PART DESCRIPTION   | LENGTH | STANDARD PART NO. | HEAVY-DUTY PART NO. |
|--|--------|-------------------|---------------------|
| <b>DOUBLE RIVET Z-BEAM (STANDARD)</b> 2-1/8" x 7/8" (14 ga)  |        |                   |                     |
| For front to back and left to right. allows particle board decking to sit flush with top of beam.<br> | 12"    | ZBS12             | -                   |
|  | 15"    | ZBS15             | -                   |
|  | 18"    | ZBS18             | -                   |
|  | 24"    | ZBS24             | -                   |
|  | 30"    | ZBS30             | -                   |
|  | 36"    | ZBS36             | -                   |
|  | 42"    | ZBS42             | -                   |
|  | 48"    | ZBS48             | -                   |
|  | 60"    | ZBS60             | -                   |

|  |     |   |       |
|--|-----|---|-------|
| <b>DOUBLE RIVET Z-BEAM (HEAVY-DUTY)</b> 2-1/8" x 7/8" (14 ga)  |     |   |       |
| For front to back and left to right. Allows particle board decking to sit flush with top of beam.<br> | 69" | - | ZBH69 |
|  | 72" | - | ZBH72 |

|   |     |       |   |
|---|-----|-------|---|
| <b>CENTER SUPPORT FOR Z BEAMS</b> 1-3/16" x 1-1/8" x 7/8" (11 ga)   |     |       |   |
| Use with Z-beams for additional decking support front to back.<br> | 24" | ZCS24 | - |
|   | 30" | ZCS30 | - |
|   | 36" | ZCS36 | - |
|   | 42" | ZCS42 | - |
|   | 48" | ZCS48 | - |

|   |   |
|---|---|
| <b>WIRE DECKING</b>   |   |
| For use where additional ventilation is required. Contact factory for additional information. |  |

## RIVETWELL DECKING

| Nominal Size | Particle Board Decking | EZ-Deck Steel |
|--------------|------------------------|---------------|
| 36" X 12"    | HPB3612                | HEZD3612      |
| 36" X 15"    | HPB3615                | HEZD3615      |
| 36" X 18"    | HPB3618                | HEZD3618      |
| 36" X 24"    | HPB3624                | HEZD3624      |
| 36" X 30"    | HPB3630                | HEZD3630      |
| 36" X 36"    | HPB3636                | HEZD3636      |
| 42" X 12"    | HPB4212                | HEZD4212      |
| 42" X 15"    | HPB4215                | HEZD4215      |
| 42" X 18"    | HPB4218                | HEZD4218      |
| 42" X 24"    | HPB4224                | HEZD4224      |
| 42" X 30"    | HPB4230                | HEZD4230      |
| 42" X 36"    | HPB4236                | HEZD4236      |
| 48" X 12"    | HPB4812                | HEZD4812      |
| 48" X 15"    | HPB4815                | HEZD4815      |
| 48" X 18"    | HPB4818                | HEZD4818      |
| 48" X 24"    | HPB4824                | HEZD4824      |
| 48" X 30"    | HPB4830                | HEZD4830      |
| 48" X 36"    | HPB4836                | HEZD4836      |
| 60" X 12"    | HPB6012                | HEZD6012      |
| 60" X 15"    | HPB6015                | HEZD6015      |
| 60" X 18"    | HPB6018                | HEZD6018      |
| 60" X 24"    | HPB6024                | HEZD6024      |
| 60" X 30"    | HPB6030                | HEZD6030      |
| 60" X 36"    | HPB6036                | HEZD6036      |
| 69" X 15"    | HPB6915                | HEZD6915      |
| 69" X 30"    | HPB6930                | HEZD6930      |
| 72" X 18"    | HPB7218                | HEZD7218      |
| 72" X 24"    | HPB7224                | HEZD7224      |
| 72" X 30"    | HPB7230                | HEZD7230      |
| 72" X 36"    | HPB7236                | HEZD7236      |
| 72" X 48"    | HPB7248                | HEZD7248      |
| 84" X 24"    | HPB8424                | HEZD8424      |
| 84" X 30"    | HPB8430                | HEZD8430      |
| 84" X 36"    | HPB8436                | HEZD8436      |
| 84" X 48"    | HPB8448                | HEZD8448      |
| 96" X 18"    | HPB9618                | HEZD9618      |
| 96" X 24"    | HPB9624                | HEZD9624      |
| 96" X 30"    | HPB9630                | HEZD9630      |
| 96" X 36"    | HPB9636                | HEZD9636      |
| 96" X 48"    | HPB9648                | HEZD9648      |

Particle Board Decking is type 1-M-2, 5/8" industrial grade and is in stock for immediate shipment. Order using the product number(s) listed. Be sure to order one each of particle board decking or EZ-Deck steel decking per level. All above decking is in stock. Additional sizes available on special order.

**NOTE: EZ-Deck must be center supported on units 48" wide and wider.**

COLOR SELECTION

729 Parchment

5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS

83

STOCK → PROGRAM

# PARTICLE BOARD & E-Z DECK CAPACITY RATINGS


THE FASTEST SHIPPING IN THE INDUSTRY...

Recommended safe use load table for 5/8" particle board and EZ-Deck steel decking allowable uniformly distributed static live loads for deck material


| Size<br>(inches)<br>W x D | Particle<br>Board<br>Decking | EZ-Deck<br>Steel<br>Decking | 2 Sides Supported |               | 4 Sides Supported |               | 4 Sides + Center Supported |               | 4 Sides + 2 Center Supported |               |
|---------------------------|------------------------------|-----------------------------|-------------------|---------------|-------------------|---------------|----------------------------|---------------|------------------------------|---------------|
|                           |                              |                             | LOAD<br>(lbs.)    | DEFL<br>(ins) | LOAD<br>(lbs.)    | DEFL<br>(ins) | LOAD<br>(lbs.)             | DEFL<br>(ins) | LOAD<br>(lbs.)               | DEFL<br>(ins) |
| 36x12                     | HPB3612                      | HEZD3612                    | 425               | 0.06          | 675               | 0.08          |                            |               |                              |               |
| 36x18                     | HPB3618                      | HEZD3618                    | 400               | 0.17          | 550               | 0.18          |                            |               |                              |               |
| 36x24                     | HPB3624                      | HEZD3624                    | 305               | 0.30          | 435               | 0.23          |                            |               |                              |               |
| 36x30                     | HPB3630                      | HEZD3630                    | 250               | 0.47          | 385               | 0.32          |                            |               |                              |               |
| 36x36                     | HPB3636                      | HEZD3636                    | 150               | 0.50          | 180               | 0.39          |                            |               |                              |               |
| 42x12                     | HPB4212                      | HEZD4212                    | 490               | 0.06          | 755               | 0.08          |                            |               |                              |               |
| 42x18                     | HPB4218                      | HEZD4218                    | 460               | 0.17          | 600               | 0.18          |                            |               |                              |               |
| 42x24                     | HPB4224                      | HEZD4224                    | 355               | 0.30          | 500               | 0.29          |                            |               |                              |               |
| 42x30                     | HPB4230                      | HEZD4230                    | 300               | 0.47          | 410               | 0.36          |                            |               |                              |               |
| 42x36                     | HPB4236                      | HEZD4236                    | 175               | 0.50          | 385               | 0.45          |                            |               |                              |               |
| 48x12                     | HPB4812                      | HEZD4812                    | 560               | 0.06          | 850               | 0.08          | 1160                       | 0.08          |                              |               |
| 48x18                     | HPB4818                      | HEZD4818                    | 525               | 0.17          | 635               | 0.18          | 770                        | 0.10          |                              |               |
| 48x24                     | HPB4824                      | HEZD4824                    | 405               | 0.30          | 530               | 0.30          | 700                        | 0.11          |                              |               |
| 48x30                     | HPB4830                      | HEZD4830                    | 325               | 0.47          | 440               | 0.40          | 705                        | 0.12          |                              |               |
| 48x36                     | HPB4836                      | HEZD4836                    | 200               | 0.50          | 400               | 0.50          | 755                        | 0.12          |                              |               |
| 48x48                     | HPB4848                      | HEZD4848                    | 85                | 0.50          | 275               | 0.50          | 920                        | 0.13          |                              |               |
| 60x18                     | HPB6018                      | HEZD6018                    | 660               | 0.17          | 735               | 0.18          | 835                        | 0.12          | 1140                         | 0.08          |
| 60x24                     | HPB6024                      | HEZD6024                    | 505               | 0.30          | 615               | 0.32          | 700                        | 0.15          | 1180                         | 0.10          |
| 60x30                     | HPB6030                      | HEZD6030                    | 410               | 0.47          | 520               | 0.46          | 650                        | 0.16          | 1324                         | 0.11          |
| 60x36                     | HPB6036                      | HEZD6036                    | 250               | 0.50          | 380               | 0.50          | 665                        | 0.17          | 1520                         | 0.12          |
| 60x48                     | HPB6048                      | HEZD6048                    | 105               | 0.50          | 230               | 0.50          | 750                        | 0.18          | 2000                         | 0.14          |
| 69x15                     | HPB6915                      | HEZD6915                    | 900               | 0.11          | 950               | 0.12          | 1150                       | 0.12          | 1250                         | 0.11          |
| 69x30                     | HPB6930                      | HEZD6930                    | 470               | 0.50          | 600               | 0.50          | 670                        | 0.20          | 1220                         | 0.13          |
| 72x18                     | HPB7218                      | HEZD7218                    | 800               | 0.17          | 850               | 0.17          | 1000                       | 0.15          | 1200                         | 0.10          |
| 72x24                     | HPB7224                      | HEZD7224                    | 605               | 0.30          | 680               | 0.31          | 770                        | 0.19          | 1135                         | 0.12          |
| 72x30                     | HPB7230                      | HEZD7230                    | 500               | 0.47          | 610               | 0.50          | 680                        | 0.21          | 1200                         | 0.14          |
| 72x36                     | HPB7236                      | HEZD7236                    | 300               | 0.50          | 390               | 0.50          | 655                        | 0.23          | 1325                         | 0.16          |
| 72x48                     | HPB7248                      | HEZD7248                    | 130               | 0.50          | 215               | 0.50          | 685                        | 0.25          | 1670                         | 0.18          |
| 84x24                     | HPB8424                      | HEZD8424                    | 705               | 0.30          | 765               | 0.31          | 870                        | 0.23          | 1150                         | 0.15          |
| 84x30                     | HPB8430                      | HEZD8430                    | 570               | 0.47          | 650               | 0.49          | 735                        | 0.27          | 1150                         | 0.18          |
| 84x36                     | HPB8436                      | HEZD8436                    | 355               | 0.50          | 415               | 0.50          | 670                        | 0.29          | 1210                         | 0.20          |
| 84x48                     | HPB8448                      | HEZD8448                    | 150               | 0.50          | 215               | 0.50          | 660                        | 0.33          | 1460                         | 0.23          |
| 96x18                     | HPB9618                      | HEZD9618                    | 1050              | 0.17          | 1115              | 0.17          | 1300                       | 0.18          | 1500                         | 0.15          |
| 96x24                     | HPB9624                      | HEZD9624                    | 810               | 0.30          | 850               | 0.31          | 1000                       | 0.26          | 1200                         | 0.18          |
| 96x30                     | HPB9630                      | HEZD9630                    | 655               | 0.47          | 710               | 0.49          | 800                        | 0.32          | 1180                         | 0.20          |
| 96x36                     | HPB9636                      | HEZD9636                    | 405               | 0.50          | 450               | 0.50          | 710                        | 0.36          | 1150                         | 0.24          |

**NOTE:** The above load chart refers to the deck materials only. Particle board decking is 5/8" industrial grade type 1-M-2. EZ-Deck steel decking is 22 gauge galvanized sheet steel fabricated in 6" deep channel planks (models listed above include multiple planks to meet unit depth). 15" deep Ez-Deck will be shipped in two (2) 7 1/2" deep planks. The allowable shelf load capacity may be reduced due to allowable post and / or beam capacities. Specific deflection limits may also reduce the shelf load capacity. **NOTE: EZ-Deck must be center supported on units 48" wide and wider.**

## Particle Board Decking

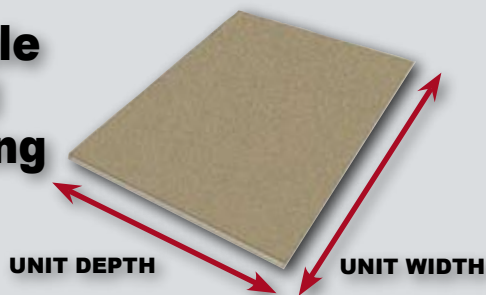

## EZ-Deck Steel Decking

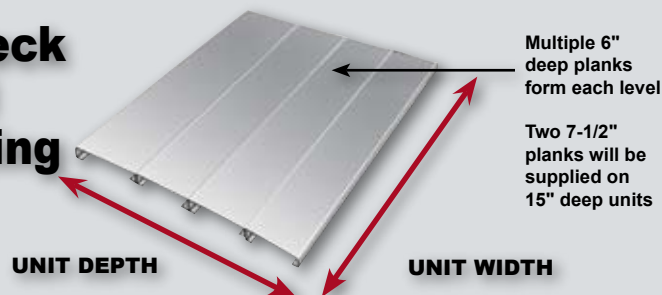

**NOTE:** EZ-Deck steel decking is for use with double rivet units **ONLY**.



## POST CAPACITY CHART

Recommended safe loads (per post) for use only where seismic forces are not a factor

| BEAM SPACING | STD. ANGLE POST CAPACITY | HEAVY ANGLE POST CAPACITY |
|--------------|--------------------------|---------------------------|
| 12"          | 1530                     | 1735                      |
| 18"          | 1520                     | 1720                      |
| 24"          | 1510                     | 1695                      |
| 30"          | 1490                     | 1680                      |
| 36"          | 1350                     | 1660                      |
| 42"          | 990                      | 1560                      |
| 48"          | 755                      | 1195                      |

| BEAM SPACING | STANDARD/HEAVY-DUTY T-POST CAPACITY |
|--------------|-------------------------------------|
| 12"          | 5045                                |
| 18"          | 4965                                |
| 24"          | 4850                                |
| 30"          | 4705                                |
| 36"          | 4525                                |
| 42"          | 4315                                |
| 48"          | 4075                                |

Post capacities are based on the maximum vertical distance between left-to-right beams or front-to-back beams, whichever is greater. In single rivet beam units, the vertical distance between front-to-back beams will usually govern. Tie plates must be spaced no more than 48 inches apart to insure structural stability when joining angle post together. All units require tie plates at top and bottom.

The above capacities are not intended for use when designing multi-level systems or for specific requirements where seismic forces are a factor. For specific multi-level or seismic requirements contact your Hallowell Sales Manager.

### BEAM LOAD TABLE (CAPACITY PER PAIR)

Recommended safe use allowable uniformly distributed hand loaded static beam loads

|                                   | WITHOUT CENTER. SUPTS.(***) |                 |                  | WITH CENTER. SUPTS.(*) |                  |
|-----------------------------------|-----------------------------|-----------------|------------------|------------------------|------------------|
|                                   | LENGTH (IN.)                | CAPACITY (LBS.) | DEFLECTION (IN.) | CAPACITY (LBS.)        | DEFLECTION (IN.) |
| <b>SINGLE RIVET SHELF BEAMS</b>   |                             |                 |                  |                        |                  |
| STANDARD BEAM                     | 36                          | 350             | 0.25             | -                      | -                |
|                                   | 42                          | 300             | 0.30             | -                      | -                |
|                                   | 48                          | 250             | 0.34             | -                      | -                |
| HEAVY DUTY BEAM                   | 36                          | 600             | 0.25             | -                      | -                |
|                                   | 42                          | 550             | 0.30             | -                      | -                |
|                                   | 48                          | 500             | 0.34             | -                      | -                |
| <b>DOUBLE RIVET ANGLE BEAMS</b>   |                             |                 |                  |                        |                  |
| STANDARD BEAM                     | 36                          | 1000            | ***              | -                      | -                |
|                                   | 42                          | 780             | ***              | -                      | -                |
|                                   | 48                          | 500             | ***              | 875*                   | 0.12             |
| HEAVY DUTY BEAM                   | 48                          | 750             | ***              | 1400**                 | 0.16             |
|                                   | 60                          | 600             | ***              | 1200                   | 0.25             |
|                                   | 69                          | 525             | ***              | 1050                   | 0.33             |
|                                   | 72                          | 500             | ***              | 1000                   | 0.36             |
|                                   | 84                          | -               | -                | 840                    | 0.49             |
|                                   | 96                          | -               | -                | 620                    | 0.53             |
| <b>DOUBLE RIVET CHANNEL BEAMS</b> |                             |                 |                  |                        |                  |
|                                   | 60                          | -               | -                | 2240                   | 0.23             |
|                                   | 72                          | -               | -                | 1850                   | 0.33             |
|                                   | 84                          | -               | -                | 1600                   | 0.45             |
|                                   | 96                          | -               | -                | 1400                   | 0.59             |
| <b>DOUBLE RIVET Z-BEAM</b>        |                             |                 |                  |                        |                  |
|                                   | 48                          | 1250            | -                | 1750                   | -                |
|                                   | 60                          | 750             | -                | 1000                   | -                |
|                                   | 69                          | 600             | -                | 1000                   | -                |
|                                   | 72                          | 600             | -                | 1000                   | -                |

### DESIGN CRITERIA:

All units must have a full perimeter of double rivet beams at the top and bottom to insure a stable and rigid unit. All units using single rivet beams 10'0" to 18'0" in height, require an additional double rivet perimeter beam level located approximately in the middle of the unit.

All single rivet beam units must have one (1) intermediate pair of front to back beams for 7'0" and 8'0" high units and (2) intermediate pair of front to back beams for 9'0" high units. For 10'0" to 18'0" high units refer to the above paragraph.

DO NOT exceed 48" between front to back beams. Single Rivet and Double Rivet Front-to-Back Beams may be common when using T-Posts on units up to 8' high.

All intermediate single rivet levels over 24 inches deep must also have single rivet beams supporting the particle board front to back.

All double rivet beam units must have front to back beams at each shelf level.

COLOR SELECTION

729 Parchment

(\*) One (1) support per pair of beams except 96" which have two (2) supports  
 (\*\*) Refer to shelf load capacities for beam capacities when depth is 30", 36" and 48".  
 (\*\*\*) Beam rotation is less than 5 degrees.

# Hallowell

Recruiter Lockers can be custom designed to meet specific sport requirements. In addition, they are made taking in consideration today's athletes and their expectations.

## RECRUITER™ Custom Wood Sport Lockers

Every Recruiter™ locker is a work of art combining beauty, practicability and functionality. These designs represent applications for specific sports. We can, however design and build one to meet your exact requirements. Our design department and engineers are ready to assist you in creating your own special locker.

**PRODUCTION ITEM**  
Please Visit  
[www.Hallowell-List.com](http://www.Hallowell-List.com)  
For Lead Times



Adjustable shelves provide exceptional flexibility to user.

### FOOTBALL LOCKER



### BASKETBALL LOCKER



### SOCCER LOCKER



### HOCKEY LOCKER



### BASEBALL AND LACROSSE LOCKER



Digital Lock



Combination lock



Upper security box with piano hinge



Adjustable upper shelves



Lower Seat with foot locker




Adjustable side shelves



Unique lockable storage for lacrosse and baseball



Lower Seat with cubbie storage

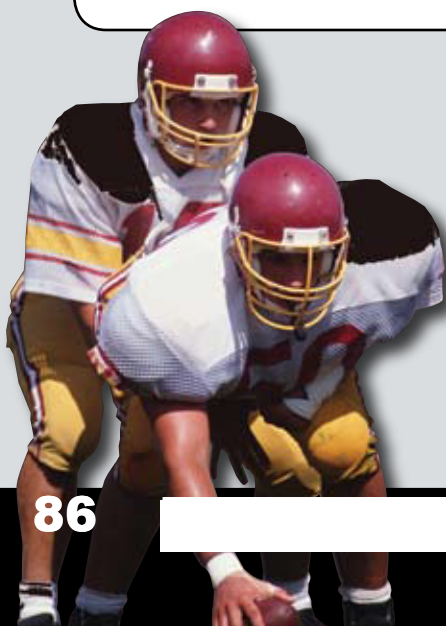

**SAFETY  
DURABILITY  
VALUE...**



**Hallowell®**

**HALLOWELL® ALL-WELDED SCHOOL CUBBIES**

**CUBBIE**

**Children Safe!**



Hallowell Cubbie Locker line is designed to meet the needs of early childhood and elementary school classrooms. Combining our unibody all-welded locker construction and the added safety features required for this specialized market, we offer four distinct models designed to meet any child's personal storage needs. Hallowell Cubbies are backed by our written lifetime Warranty.

## 4 MODELS AND 24 COLORS



*Primary  
Cubbie*



*Primary II  
Cubbie*



*Primary Jr.  
Cubbie*



*Backpack  
Cubbie*



Hemmed and beaded edges eliminate sharp edges



Number plate in bottom of cubbie so children can easily identify their cubbie space.

### FEATURES

**BODY CONSTRUCTION:** Unibody all-welded 16 gauge steel construction, backs are 18 gauge, bottom is galvaneal sheet steel for maximum corrosion resistance, hemmed and beaded edges are safe to the touch

**BODY STYLES:** Open design, 4 body styles

**SHELVES:** 16 gauge welded to body for added rigidity with a beaded leading edge for added safety

| MODEL SIZES        | WIDTH    | DEPTH    | HEIGHT |
|--------------------|----------|----------|--------|
| Primary Cubbie     | 12", 15" | 12", 16" | 48"    |
| Primary II Cubbie  | 12", 15" | 12", 16" | 48"    |
| Primary Jr. Cubbie | 12", 15" | 12", 16" | 24"    |
| Backpack Cubbie    | 15", 18" | 12", 16" | 48"    |

**NOTES:** Easily secures to wall and floor for added safety, Low installation costs, reduced installation time, low maintenance, low life-cycle cost, lifetime warranty, insect and termite proof. All welded cubbies will ship in multiple column units up to 60" wide to meet individual jobsite conditions.



# Hallowell®

## THESE ARE THE FINEST SPORT LOCKERS MADE TODAY



### HSL-00 Open Front Gear Lockers

Our complete line-up of open-front gear lockers are specifically engineered for High School, Collegiate and Professional team organizations who demand high performance equipment storage solutions.



Base model offers upper hat shelf and coat hooks




Shown with optional 12" wide security box, stainless steel coat rod and foot locker/seat

**These lockers feature our unique Unibody Design which provides unsurpassed strength and durability.**



Underside of Foot Locker Seat is reinforced to support today's athlete.

Security-Plus™ ventilated front panel



## Our all-welded Open Front Gear lockers are designed to accommodate a wide variety of equipment and apparel while allowing maximum ventilation.

Our base model includes one upper hat shelf with a compliment of coat hooks. You can add a choice from three upper security compartments for personal storage: a small wallet security box, a 12" wide side hinged security box or the full width top hinged security compartment.

In the lower area, you can add a shelf/seat or opt for the foot locker/seat for a lockable equipment storage area. You can finish off your sport locker with our optional stainless steel coat rod.

Open Front Gear lockers feature our all-welded Unibody design which provides two front frame channels between sides of multiple column units and integral sides which are diamond perforated for ventilation.



Shown with optional wallet security box and stainless steel coat rod



Shown with optional full-width security compartment, and stainless steel coat rod, and lower seat/shelf. Door includes Security-Plus™ ventilation.



**Open Front lockers are engineered to last the lifetime of your facility, we guarantee it.**

### LOCKER SIZES:

Widths 12", 15", 18", 24", 30", 33" and 36"

Depths 12", 16", 18", 22"


Column Heights 60", 72", 84"

**Note:** Lockers will ship in multiple column units up to 60" wide to meet individual job site conditions.



Optional stainless steel coat rod

Hallowell®

PRODUCTION  
ITEMPlease Visit  
[www.Hallowell-List.com](http://www.Hallowell-List.com)  
For Lead Times

## HTHV-01 Turn-handle Ventilated Lockers



3-Point projecting  
turn-handle  
latching

### STANDARD SIZES FOR ALL-WELDED WARDROBE LOCKERS

|                        | SINGLE TIER            | DOUBLE TIER            | TRIPLE TIER            |
|------------------------|------------------------|------------------------|------------------------|
| Widths                 | 9", 12", 15", 18", 24" | 9", 12", 15", 18", 24" | 9", 12", 15", 18", 24" |
| Depths                 | 12", 16", 18", 22"     | 12", 16", 18", 22"     | 12", 16", 18", 22"     |
| Opening Heights        | 48", 60", 72"          | 24", 30", 36"          | 20", 24"               |
| Nominal Column Heights | 48", 60", 72"          | 48", 60", 72"          | 60", 72"               |

**NOTE:** All welded lockers will ship in multiple column units up to 60" wide to meet individual job site conditions

### FEATURES:

**BODY CONSTRUCTION:** Unibody all-welded construction, 16 gauge 1-1/2" high continuous bottom with reinforcing channels welded to the underside at each side panel providing a rigid unit base, 16 gauge continuous top, 16 gauge diamond perforated sides are integral with front vertical frame, 18 gauge solid back

**DOORS:** 14 gauge diamond perforated doors are standard. Plain, Secure-Air-Flow, and louvered door styles are available

**HANDLE:** 3-point turn-handle latching

**DOOR STRIKE:** Continuous vertical door strike at both hinge and latch side

**LATCHING:** 3-point turn-handle latching engaging at frame top, bottom and center side of door, 3/8" diameter lock rods are the heaviest in the industry, 3/16" turn-handle welded to 11 gauge cam, 11 gauge lock plate keeper is welded to center side of frame

**HINGES:** 16 gauge continuous piano hinge

**SHELVES:** 16 gauge hat shelf for single tier openings 60" and 72" high, 16 gauge intermediate shelves

**HOOKS:** 2-single hooks and 1-double hook is standard. 1-double hook only for triple tier and 1-double and 1-single hook for 9" wide openings 30" and higher

**WARRANTY:** Lifetime

**SIZES:** See chart for standard wardrobe locker sizes

## HGLV-02 Gravity Latch Ventilated Lockers

SEE ABOVE CHART FOR  
STANDARD SIZES



Seamless deep  
drawn stainless steel  
recessed handle  
with gravity  
lift-type latching

### FEATURES:

**BODY CONSTRUCTION:** Unibody all-welded construction, 16 gauge 1-1/2" high continuous bottom with reinforcing channels welded to the underside at each side panel providing a rigid unit base, 16 gauge continuous top, 16 gauge diamond perforated sides are integral with front vertical frame, 18 gauge solid back

**DOORS:** 14 gauge diamond perforated doors are standard. Plain, Secure-Air-Flow, Safety-View and louvered door styles are available

**HANDLE:** Deep-drawn seamless stainless steel recessed handle

**DOOR STRIKE:** Continuous vertical door strike at both hinge and latch side

**LATCHING:** 12 gauge latch hooks MIG welded to frame, gravity lift-type multi-point spring loaded latching:

- 3-point latching for openings 48" high and higher
- 2-point latching for openings 20" high thru 36" high


**HINGES:** 16 gauge continuous piano hinge

**SHELVES:** 16 gauge hat shelf for single tier openings 60" and 72" high, 16 gauge intermediate shelves

**HOOKS:** 2-single hooks and 1-double hook is standard. 1-double hook only for triple tier and 1-double and 1-single hook for 9" wide openings 30" and higher

**WARRANTY:** Lifetime

**SIZES:** See chart above for standard wardrobe locker sizes



## HGLS-03 Gravity Latch Solid Sides



Seamless deep drawn stainless steel recessed handle with gravity lift-type latching



### FEATURES:

**BODY CONSTRUCTION:** Unibody all-welded construction, 16 gauge 1-1/2" high continuous bottom with reinforcing channels welded to the underside at each side panel providing a rigid unit base, 16 gauge continuous top, 16 gauge solid sides are integral with front vertical frame, 18 gauge solid back

**DOORS:** 14 gauge louvered doors are standard. Plain, Secure-Air-Flow, Safety-View and diamond perforated door styles are available

**HANDLE:** Deep-drawn seamless stainless steel recessed handle

**DOOR STRIKE:** Continuous vertical door strike at both hinge and latch side

**LATCHING:** 12 gauge latch hooks MIG welded to frame, gravity lift-type multi-point spring loaded latching:

- 3-point latching for openings 48" high and higher
- 2-point latching for openings 20" high thru 36" high

**HINGES:** 16 gauge continuous piano hinge

**SHELVES:** 16 gauge hat shelf for single tier openings 60" and 72" high, 16 gauge intermediate shelves

**HOOKS:** 2-single hooks and 1-double hook is standard.

1-double hook only for triple tier and 1-double and 1-single hook for 9" wide openings 30" and higher

**WARRANTY:** Lifetime

**SIZES:** See page 78 for standard wardrobe locker sizes

## HSPV-04 Single-Point Ventilated Lockers



### FEATURES:

**BODY CONSTRUCTION:** Unibody all-welded construction, 16 gauge 1-1/2" high continuous bottom with reinforcing channels welded to the underside at each side panel providing a rigid unit base, 16 gauge continuous top, 16 gauge diamond perforated sides are integral with front vertical frame, 18 gauge solid back

**DOORS:** 14 gauge diamond perforated doors and full-height door stiffener are standard. Plain, Secure-Air-Flow and louvered door styles are available

**HANDLE:** Deep-drawn seamless stainless steel recessed handle is standard.

**DOOR STRIKE:** Continuous vertical door strike at both hinge and latch side

**LATCHING:** Single-point maintenance-free quiet latching system, 11 gauge MIG welded latch

**HINGES:** 16 gauge continuous piano hinge

**SHELVES:** 16 gauge hat shelf for single tier openings 60" and 72" high, 16 gauge intermediate shelves

**HOOKS:** 2-single hooks and 1-double hook is standard.


1-double hook only for triple tier and 1-double and 1-single hook for 9" wide openings 30" and higher

**WARRANTY:** Lifetime

**SIZES:** See page 78 for standard wardrobe locker sizes




Deep drawn stainless steel recessed handle with single-point latching is standard



**Hallowell HSPV-04 lockers** include a 3" wide 18 gauge full height door stiffener spot welded to the inner door face and MIG welded to the hinge side as well as to the top and bottom door flanges providing a rigid torque-free door. A 1-1/2" wide stiffener will be furnished for 9" wide HSPV-04 doors.

# Hallowell

**PRODUCTION  
ITEM**

 Please Visit  
[www.Hallowell-List.com](http://www.Hallowell-List.com)  
 For Lead Times


## HSPS-05 Single-Point Solid Lockers



Deep drawn stainless steel recessed handle with single-point latching

### FEATURES:

**BODY CONSTRUCTION:** Unibody all-welded construction, 16 gauge 1-1/2" high continuous bottom with reinforcing channels welded to the underside at each side panel providing a rigid unit base, 16 gauge continuous top, 16 gauge solid sides are integral with front vertical frame, 18 gauge solid back

**DOORS:** 14 gauge plain doors and a full-height door stiffener are standard. Secure-Air-Flow, diamond perforated and louvered door styles are available

**HANDLE:** Deep-drawn seamless stainless steel recessed handle

**DOOR STRIKE:** Continuous vertical door strike at both hinge and latch side

**LATCHING:** Single-point maintenance-free quiet latching system, 11 gauge MIG welded latch

**HINGES:** 16 gauge continuous piano hinge

**SHELVES:** 16 gauge hat shelf for single tier openings 60" and 72" high, 16 gauge intermediate shelves

**HOOKS:** 2-single hooks and 1-double hook is standard.

1-double hook only for triple tier

1-double and 1-single hook for 9" wide openings 30" and higher

**WARRANTY:** Lifetime

**SIZES:** See page 78 for standard wardrobe locker sizes



**Hallowell HSPS-05 lockers** include a 3" wide 18 gauge full height door stiffener spot welded to the inner door face and MIG welded to the hinge side as well as to the top and bottom door flanges providing a rigid torque-free door. A 1-1/2" wide stiffener will be furnished for 9" wide HSPS-05 doors.

## HBLV-06 Ventilated Box Lockers



### FEATURES:

**BODY CONSTRUCTION:** Unibody all-welded construction, 16 gauge 1-1/2" high continuous bottom with reinforcing channels welded to the underside at each side panel providing a rigid unit base. 16 gauge continuous top, 16 gauge diamond perforated sides are integral with front vertical frame, 18 gauge solid back

**DOORS:** 14 gauge diamond perforated doors are standard. Louvered, Secure-Air-Flow and plain door styles are available.

**HANDLE/LATCHING:** Single-point thru-the-door projecting finger pull handle with padlock hasp. Optional deep-drawn seamless stainless steel recessed handle is available

**HINGES:** 16 gauge continuous piano hinge

**HOOKS:** None

**SHELVES:** 16 gauge intermediate shelves

**WARRANTY:** Lifetime

**SIZES:** See chart below for standard box locker sizes

**NOTE:** 8" and 9" high box doors will be top hinged with a concealed 3/8" diameter continuous hinge rod

Single-point thru-the-door finger pull padlock hasp  
Optional padlock strike plates for box doors protect finish from being marred by padlock




4  
TIER  
TO  
9  
TIER

Widths for all box locker openings 12", 15", 18"  
Depths for all box locker openings 12", 16", 18", 22"

| TIER       | OPENING HEIGHT    | NOMINAL COLUMN HEIGHTS |
|------------|-------------------|------------------------|
| Four Tier  | 12", 15", 18"     | 48", 60", 72"          |
| Five Tier  | 12", 14.4"        | 60", 72"               |
| Six Tier   | 8", 10", 12"      | 48", 60", 72"          |
| Seven Tier | (6) 10" & (1) 12" | 72"                    |
| Eight Tier | 8", 9"            | 64", 72"               |
| Nine Tier  | 8"                | 72"                    |

Please note that the actual units supplied will be fabricated to meet layout and job conditions in standard width units up to 60" wide



## HESL-07 Equipment Storage Lockers (TA-50)

### FEATURES:

**BODY CONSTRUCTION:** Unibody all-welded construction, 16 gauge 1-1/2" high continuous bottom with reinforcing channels welded to the underside at each side panel providing a rigid unit base, 16 gauge continuous top, 16 gauge diamond perforated sides are integral with front vertical frame, 18 gauge solid back. Optional solid sides are available

**DOORS:** 14 gauge diamond perforated doors with a full height door stiffener are standard. Secure-Air-Flow, diamond perforated and louvered door styles are available

**HANDLE:** 3-point turn-handle

**DOOR STRIKE:** Continuous vertical door strike at both hinge sides

**LATCHING:** 3/16" turn-handle welded to 11 gauge cam engaging frame at top, bottom and center side of door. 3/8" diameter lock rods

**HINGES:** 16 gauge continuous piano hinge

**SHELVES:** 16 gauge hat shelf located 12" down from top, 16 gauge lower shelf located 18" up from bottom

**COAT ROD:** Stainless steel full-width coat rod located under hat shelf

**WARRANTY:** Lifetime



### Equipment Storage Locker Sizes

|         |                    |
|---------|--------------------|
| Widths  | 24", 30", 36", 48" |
| Depths  | 12", 16", 18", 22" |
| Heights | 60", 72", 84"      |

Equipment Storage lockers will ship in multiple column units up to 60" wide to meet individual job site conditions.



3-point projecting turn-handle latching is standard.

Shown with optional Padlock Strike Plate

Shown with optional padlock strike plate



## Premium KD Wardrobe Lockers



Single Tier,  
1 wide,  
1 opening

Double Tier,  
1 wide,  
2 openings

Triple Tier,  
1 wide,  
3 openings

### FEATURES: (Doors 20" high and higher)

**BODY CONSTRUCTION:** Knock down (KD) with 24 gauge solid body components

**DOORS:** 16 gauge louvered doors, 18 gauge for 9" wide, are standard. Plain, Secure-Air-Flow, Safety-View and diamond perforated door styles are available

**FRAME:** 16 gauge frame with 16 gauge horizontal cross member between doors on double and triple tier wardrobe lockers

**HANDLE:** Deep-drawn seamless stainless steel recessed handle

**DOOR STRIKE:** Continuous vertical door strike at both hinge and latch side

**LATCHING:** 12 gauge latch hooks MIG welded to frame. Gravity lift-type multi-point spring loaded latching:

- 3-point latching for openings 48" high and higher
- 2-point latching for openings 20" high thru 36" high

**HINGES:** 16 gauge continuous piano hinge

**HOOKS:** 2-single hooks and 1-double hook is standard. 1- double hook only for triple tier and 1-double and 1 - single hook for 9" wide openings 30" and higher

**SHELVES:** Hat shelf for single tier openings 60" and 72" high

**NOTES:** All production KD lockers are supplied without legs unless otherwise specified

**WARRANTY:** 2 years

**SIZES:** See page 82 for sizes



Deep Drawn stainless steel recessed handle with gravity lift-type latching



Latch hook is welded to frame

# Hallowell®



**PRODUCTION ITEM**  
Please Visit  
[www.Hallowell-List.com](http://www.Hallowell-List.com)  
For Lead Times

## ECONOMY AND VERSATILITY

### Premium KD Box Lockers

**FEATURES:** (Doors 18" high and under)

**BODY CONSTRUCTION:** Knock down (KD) with 24 gauge solid body components

**DOORS:** 18 gauge louvered doors are standard. Plain, Secure-Air-Flow, Safety-View Plus and diamond perforated door styles are available

**FRAME:** 16 gauge frame

**HANDLE:** Projecting finger pull

**DOOR STRIKE:** Continuous vertical door strike at both hinge and latch side

**LATCHING:** Single-point thru-the-door finger pull padlock hasp

**HINGES:** 16 gauge continuous piano hinge

**HOOKS:** None

**NOTES:** All production KD lockers are supplied without legs unless otherwise specified. Safety-View Plus polycarbonate doors are available for 12" wide x 12" high five and six tier box doors only

**WARRANTY:** 2 years

**SIZES:** See chart below for sizes

Box door single-point thru-the-door finger pull padlock hasp



Optional padlock strike plates for box doors protect finish from being marred by padlock



Four Tier,  
1 wide,  
4 openings

Five Tier,  
1 wide,  
5 openings

Six Tier,  
1 wide,  
6 openings



| Premium K.D. Locker Sizes |                   | Width              | Depth               | Opening Height  | Frame Height           |
|---------------------------|-------------------|--------------------|---------------------|-----------------|------------------------|
| Wardrobe                  | Single Tier       | 9" 12" 15" 18" 24" | 12" 15" 18" 21" 24" | 36" 48" 60" 72" | 36" 48" 60" 72"        |
|                           | Double Tier       | 9" 12" 15" 18"     | 12" 15" 18" 21"     | 30" 36"         | 60" 72"                |
|                           | Triple Tier       | 9" 12" 15" 18"     | 12" 15" 18" 21"     | 20" 24"         | 60" 72"                |
| Box                       | Four Tier         | 12", 15"           | 12" 15" 18"         | 15" 18"         | 60" 72"                |
|                           | Five Tier         | 12", 15"           | 12" 15" 18"         | 12", 14.4"      | 60" 72"                |
|                           | Six Tier          | 12", 15"           | 12" 15" 18"         | 12"             | 72"                    |
| Specialty                 | Two Person        | 15" 18"            | 12" 15" 18"         | N/A             | 60", 72"               |
|                           | Duplex            | 15"                | 12" 15" 18"         | 60", 72"        | 60", 72"               |
|                           | Sixteen Person    | 72"                | 18"                 | 12"             | 78" (Includes 6" legs) |
|                           | 4 wide wall mount | 48"                | 18"                 | 12"             | 14-3/4"                |

### Premium KD Specialty Lockers



**Duplex**  
Double Tier,  
2 wide,  
2 openings



**Two-Person**  
Four Tier,  
2 wide,  
4 openings

#### Duplex

Duplex Lockers are the most economical full length lockers available. Duplex lockers provide two completely private lockers in each frame. One hat shelf and two single wall hooks are standard in each wardrobe opening. Coat rod is optional.

#### Two-Person

Two-Person Lockers provide ample storage space for two users in a 15" wide space. Upper box doors are controlled by command latches located in the corresponding lower compartment. Two single hooks per wardrobe opening is standard. Coat rod is optional.



Stainless steel recessed handle is standard for Duplex and Two-Person lockers

4-wide Wall Mount Unit



#### Sixteen Person

lockers are the economical solution for personal security along with hanging space for full length garments. 48" wide coat rod is included

6" high legs are standard for 16-Persons lockers only



# THE STANDARD FOR QUIET LOCKERS



# Hallowell®

STANDARD QUIET & MFQ QUIET LOCKERS

## Standard And Whisper Quiet KD Lockers

Silent  
Quiet

Standard  
Quiet



Double Tier,  
1 wide,  
2 openings

Double Tier,  
1 wide,  
2 openings

### FEATURES:

**BODY CONSTRUCTION:** Knock down (KD) with 24 gauge solid body components

**DOORS:** 16 gauge plain doors (18 gauge for 9" wide), Sound deadening panel and vinyl coated latching for Whisper quiet lockers only

**FRAME:** 16 gauge frame with 16 gauge horizontal cross member between doors on double and triple tier wardrobe lockers

**HANDLE:** Deep drawn stainless steel recessed handle

**DOOR STRIKE:** Continuous vertical door strike at both hinge and latch side

**LATCHING:** 12 gauge latch hooks MIG welded to frame. Gravity lift-type multi-point spring loaded latching:

- 3-point latching for openings 48" high and higher
- 2-point latching for openings 20" high thru 36" high

**HINGES:** 16 gauge continuous piano hinge

**HOOKS:** 2-single hooks and 1-double hook is standard. 1- double hook only for triple tier and 1-double and 1 - single hook for 9" wide openings 30" and higher

**SHELVES:** Hat shelf for single tier openings 60" and 72" high

**NOTES:** All production KD lockers are supplied without legs unless otherwise specified. Standard Quiet and Artisan Quiet lockers are available with plain doors only. Additional perforations/louvers in the door will increase decibel levels thus reducing the efficiency of our quiet design.

**WARRANTY:** 2 years

**SIZES:** See wardrobe locker chart on page 82 for sizes

**MAXOPTION**  
upgrades all body  
components to  
16 gauge with  
18 gauge back



Sound  
deadening  
panel welded  
to inner door  
face is  
standard on  
Silent Quiet



Ventilated top  
and bottom  
door flanges



Deep drawn  
stainless steel  
recessed  
handle  
with gravity  
lift-type  
latching



12 gauge  
Latch hook  
is welded to  
frame

## Maintenance-Free™ Quiet KD Lockers (MFQ)

**MAXOPTION**  
upgrades all body  
components to  
16 gauge with  
18 gauge back

### FEATURES:

**BODY CONSTRUCTION:** Knock-down, 24 gauge

**BODY STYLES:** Single, double and triple tier

**DOOR:** 16 gauge, solid

**HINGES:** Continuous piano type

**HANDLE:** Deep drawn stainless steel recessed handle with single-point latching. Recessed handle protects finish from being marred by padlock.

**HOOKS:** One double prong ceiling hook and two single wall hooks per single and double tier opening. One double ceiling hook for triple tier.

**COAT RODS:** Available for single tier at a nominal cost

**SHELVES:** Hat shelf for single tier openings 60" and 72"

**WARRANTY:** 2 years

**SIZES:** See wardrobe locker chart on page 82 for sizes


**NOTES:** All production lockers are supplied without legs unless otherwise specified.



Single Tier,  
1 wide,  
1 openings

Double Tier,  
1 wide,  
2 openings

Triple Tier,  
1 wide,  
3 openings



11 gauge  
single-point  
latch



Deep drawn  
stainless steel  
recessed  
handle with  
single-point  
latching



MFQ lockers  
include a 3"  
wide 18 gauge  
full height door  
stiffener spot  
welded to the  
inner door face  
and MIG welded  
to the hinge side  
as well as to the  
top and bottom  
door flanges  
providing a rigid  
torque-free door.  
A 1-1/2" wide  
stiffener will be  
furnished for 9"  
wide MFQ doors.

STOCK  PROGRAM

THE FASTEST SHIPPING IN THE INDUSTRY...



## HEAVY-DUTY LOCKERS

**MAX OPTION**

upgrades all body components to 16 gauge with 18 gauge back



Single Tier,  
1 wide,  
1 opening

Double Tier,  
1 wide,  
2 openings

Triple Tier,  
1 wide,  
3 openings

## Heavy-Duty Corridor KD Lockers (HDC)

Heavy-Duty Corridor lockers, commonly known as HDC lockers, are designed to include all the great features of our Standard KD wardrobe lockers with the doors upgraded to 14 gauge.

## FEATURES

**BODY CONSTRUCTION:** Knock down with 24 gauge solid body components

**DOORS:** 14 gauge louvered doors are standard. Plain, Secure-Air-Flow, Safety-View and diamond perforated door styles are available

**FRAME:** 16 gauge frame with 16 gauge horizontal cross member between doors on double and triple tier wardrobe lockers

**HANDLE:** Deep-drawn seamless stainless steel recessed handle

**DOOR STRIKE:** Continuous vertical door strike at both hinge and latch side

**LATCHING:** 12 gauge latch hooks MIG welded to frame. Gravity lift-type multi-point spring loaded latching:

- 3-point latching for openings 48" high and higher
- 2-point latching for openings 20" high thru 36" high

**HINGES:** 16 gauge continuous piano hinge

**HOOKS:** 2-single hooks and 1-double hook is standard. 1- double hook only for triple tier and 1-double and 1- single hook for 9" wide openings 30" and higher

**SHELVES:** Hat shelf for single tier openings 60" and 72" high

**NOTES:** All production KD lockers are supplied without legs unless otherwise specified

**WARRANTY:** 2 years

**SIZES:** See wardrobe locker chart on page 82 for sizes


**PRODUCTION ITEM**

Please Visit  
[www.Hallowell-List.com](http://www.Hallowell-List.com)  
For Lead Times



Deep drawn stainless steel recessed handle with gravity lift-type latching.

## Heavy-Duty Ventilated KD Lockers (HDV)

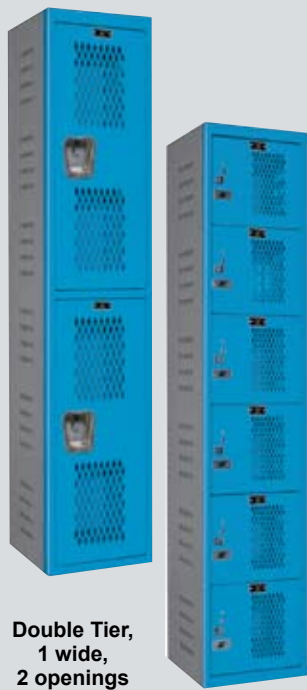

Double Tier,  
1 wide,  
2 openings

Six Tier,  
1 wide,  
6 openings

**BODY CONSTRUCTION (WARDROBE & BOX LOCKERS):** Knock down with 16 gauge solid top, bottom and intermediate shelves, 16 gauge diamond perforated sides, 18 gauge solid back

**DOORS:** 14 gauge diamond perforated doors are standard. Louvered, Security-Plus and Safety-View door styles are available

**FRAME:** 16 gauge frame with 16 gauge horizontal cross member between doors on double and triple tier wardrobe lockers

**HINGES:** 16 gauge continuous piano hinge

**DOOR STRIKE:** Continuous vertical door strike at both hinge and latch side

**WARDROBE LOCKERS (DOORS 20" AND HIGHER):**

**HANDLE:** Deep-drawn seamless stainless steel recessed handle

**LATCHING:** Gravity lift-type multi-point spring loaded latching:

- 3-point latching for openings 48" high and higher,
- 2 point latching for openings 20" high thru 36" high

**HOOKS:** 2-single hooks and 1-double hook is standard.

- 1- double hook only for triple tier and 1-double
- 1 - single hook for 9" wide openings 30" and higher

**SHELVES:** 16 gauge hat for single tier openings 60" and 72" high

**BOX LOCKERS (DOORS 18" HIGH AND UNDER):**

**HANDLE:** Single-point thru-the-door finger pull padlock hasp

**HOOKS:** None

**NOTES:** All production KD lockers are supplied without legs unless otherwise specified

**WARRANTY:** 2 years

**SIZES:** See charts on page 82 for wardrobe and box locker for sizes

**PRODUCTION ITEM**

Please Visit  
[www.Hallowell-List.com](http://www.Hallowell-List.com)  
For Lead Times



Deep drawn stainless steel recessed handle with gravity lift-type latching for doors 20" high and higher

# BENCHES, PEDESTALS AND LOCKS

# Hallowell®

BENCHES, PEDESTALS AND LOCKS



**4850 Hi-Tech Steel Pedestal**  
Fabricated from 14 gauge galvanized sheet steel. 2-piece design allows for concealed fastening. Color: Parchment



**4850-S Hi-Tech Stainless Steel Pedestal**  
Fabricated from 14 gauge stainless steel. 2-piece design allows for concealed fastening. Color: Unpainted




**8032 Adjustable Steel Pedestal**  
With cast aluminum base and concealed anchoring to floor. Color: Parchment



**4810 Heavy-Duty Cast Iron Pedestal**  
With 6" diameter top and bottom. Provided with three anchoring holes at top and bottom. Color: Parchment




**4820 Aluminum Moveable Pedestal**  
Includes holes for optional permanent anchoring to floor. Color: Parchment

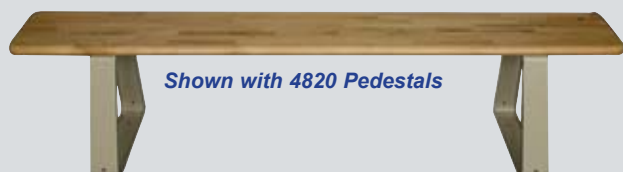

Shown with 4820 Pedestals



Shown with 4810 Pedestals

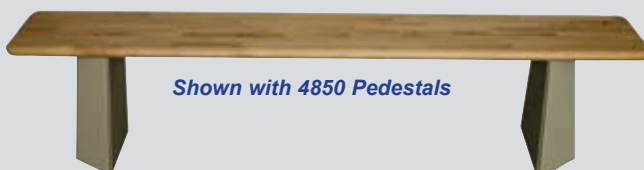

Shown with 4850 Pedestals

|                    |         |          |     |
|--------------------|---------|----------|-----|
| Benchtop Length    | 3' - 8' | 9' - 14' | 15' |
| Pedestals Required | 2       | 3        | 4   |

**Note:** Benchtop lengths over 15' will be supplied in sections

**Locker Benches** are 9-1/2" wide x 1-1/4" thick and made from laminated all white northern hard maple. They are finished with one coat deep penetrating hot sealer and two coats of heavy body high impact hot hydraulically applied lacquer. Bench tops are standard in one foot increments from 3' thru 15'. Non-standard lengths are available on special order (pedestal requirement will be for next standard size up).

## Padlocks, Built-in Locks and Specialty Locks

Hallowell recommends ZEPHYR® locks for use on all of our Lockers.



**Zephyr® Built-In Combination Locks** Available in spring-bolt and dead-bolt styles, are key controlled and include multiple combination settings



**Zephyr® Combination Padlocks** Available standard and master-keyed, padlocks can be used on all locker types



**Zephyr® Built-In Key Locks** Available in spring-bolt and dead-bolt styles and available standard or master-keyed



**Zephyr® 1730** ADA compliant for use on gravity lift-type latches

## Non-Stock Quick Ship Items - Call for Availability and Lead times.



**SAFE-O-MAT® Built-In Coin, Token and Card Locks** Available in coin return and coin collect as well as token collect and card access styles



**Digilock® KT and KP Series** Digital locks allow access using a programmable four-digit code







**Digilock® T-Series** Digitally controlled locks allow access by touching a key fob to the lock which automatically unlocks the door.



**Hallowell Digital Locks** Digital locks allow access using a programmable four-digit code

**NOTE:** An ADA compliant lock must be used on any locker that is required to meet ADA guidelines




THE FASTEST SHIPPING IN THE INDUSTRY...

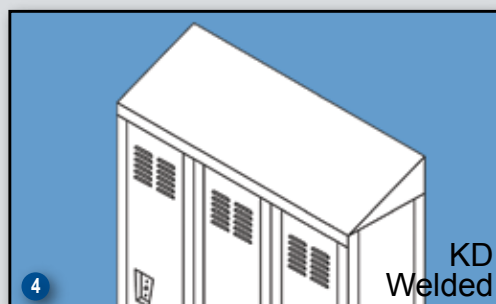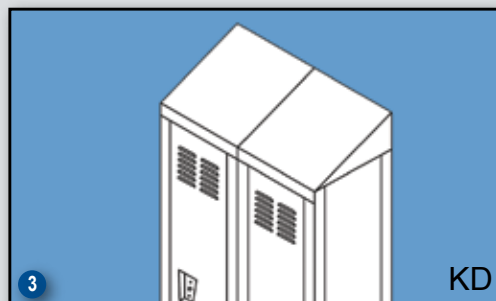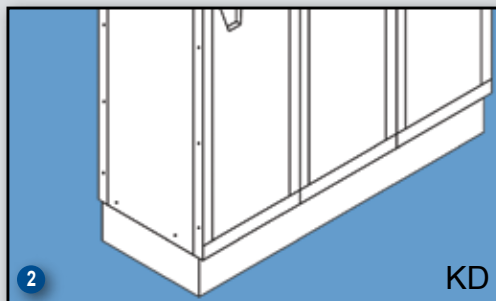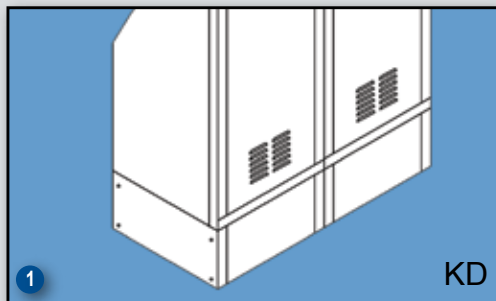

## SPECIFICATIONS

- 1 **6" Closed Front Base (KD lockers only):** Shall be fabricated of 16 gauge cold rolled sheet steel flanged on all four sides for rigidity. Front bases include projecting tabs on side flanges designed to align with holes in front legs allowing front bases to be snapped into place requiring no additional fasteners. Side bases are to be included at all exposed ends and are bolted to front and rear legs. Finish to match lockers. **Available Quick-Ship from stock in 5 standard colors.**
- 2 **4" Continuous Z-Base (KD lockers only):** Shall be fabricated from 16 gauge cold rolled sheet steel fabricated in 72" lengths, flanged at the top to form a 1-3/8" toe space and at the bottom allowing concealed fastening to the finished floor. Continuous Front Bases include holes for use with splice plates where bases are joined end-to-end. End Bases are to be included at all exposed ends. Where additional support is desired, End Bases may be substituted for splices at Continuous Front Base joints. Finish to match lockers. **Available Quick-Ship from stock in 5 standard colors.**
- 3 **20 gauge Individual Slope Top (KD lockers only):** Not less than 20 gauge cold rolled sheet steel, 18 degree pitch, fabricated to be installed individually over each locker. Slope top is formed to include a full back. Individual Slope Tops are to be installed in addition to the locker flat top. End closures are to be provided at exposed ends. Finish to match lockers. **Available Quick-Ship from stock in 5 standard colors.**
- 4 **18 gauge Continuous Slope Top:** Not less than 18 gauge cold rolled sheet steel, 18 degree pitch, in 72" lengths. A splice cover with concealed spring clip is to be used to cover joints where Continuous Slope Tops are joined end-to-end. To be installed in addition to the locker flat top with end closures for support. Finish to match lockers. **Available Quick-Ship from stock in 5 standard colors.**
- 4 **16 Gauge Continuous Slope Top:** Not less than 16 gauge cold rolled sheet steel, 18 degree pitch, in 72" lengths. A splice cover with concealed spring clip is to be used to cover joints where Continuous Slope Tops are joined end-to-end. To be installed in addition to the locker flat top with end closures for support. Finish to match lockers.
- 5 **Recessed Trim:** Fabricated of 16 gauge cold rolled sheet steel. 3" wide side trim shall be notched at the top and include a retainer to allow the 3" wide top trim to fit snugly into the side trim. Recess trim is designed to be used when the lockers are installed with the locker fronts flush with the top and side walls. The top and side trim will project 3/8" beyond the side and top walls and include return bends back to the walls. Finish to match lockers. **Available Quick-Ship from stock in 5 standard colors.**
- 6 **Minimum Punched End Panel (KD lockers only):** Shall be from 18 gauge cold rolled steel and formed to fit tightly over the universal side panel at exposed row ends. Holes are provided at perimeter for fastening to locker. Minimum Punched End Panels are designed to cover all fasteners other than those at the perimeter of the panel. Finish to match lockers. Provide at all exposed ends. **Available Quick-Ship from stock in 5 standard colors.**
- 7 **Boxed End Panel:** Shall be "Boxed" type formed from 16 gauge cold rolled steel with 1" O.D. double bends on sides and a single bend at top and bottom with no exposed holes or bolts. If lockers have slope tops, end panels must be formed with slope at top to cover the ends of the slope tops. Finish to match lockers. Provide at all exposed ends.
- 8 **Fillers:** Provide where indicated, of not less than 16 gauge cold rolled sheet steel, factory fabricated to and finished to match lockers. **Available Quick-Ship from stock in 5 standard colors.**

**Note:** visit our website at [www.hallowell.com](http://www.hallowell.com) for complete installation details and instructions.

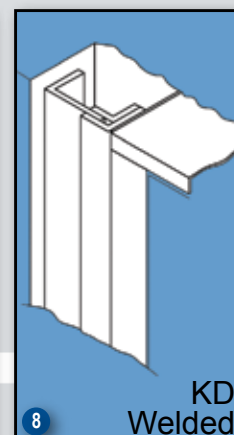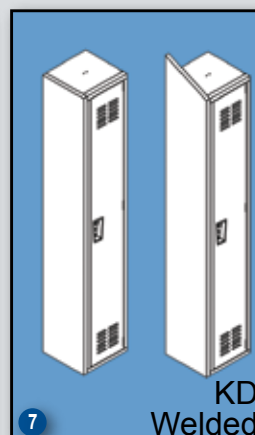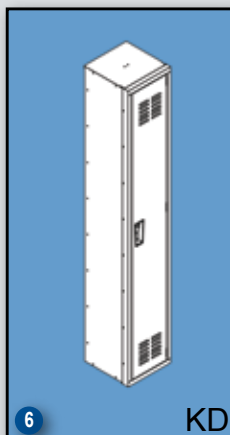

## 24 Designer Powder Coat Colors

For Metal Production Lockers

Enhance your decor with two-tone  
color combinations, doors one  
color and frame a second color,  
**AT NO ADDITIONAL COST.**

All surfaces shall be thoroughly cleaned with a seven stage hot-spray washing process and coated with an insoluble iron phosphate film. A high grade of custom blended powder is applied by a computer controlled, highly efficient electrostatic paint system. The product is cured for 20 minutes at 350 degrees through a continuous baking oven to provide maximum paint adhesion, tough durability and a smooth paint finish.

**Note:** All body components of production KD lockers will be painted our standard neutral color, currently Parchment (choice of Parchment or Hallowell Gray for HDV body components only).



|   |   |   |
|---|---|---|
|    |    |    |
| 714 Snow White  | 710 Sandstone   | 708 Midnight Ebony  |
|    |    |    |
| 736 Sport Silver  | 729 Parchment   | 713 Sand Beige  |
|    |    |    |
| 711 Platinum  | 706 Heather   | 725 Hallowell Gray  |
|   |   |   |
| 738 Charcoal  | 723 Trophy  | 728 Hoop  |
|  |  |  |
| 737 Forest Gold   | 721 Relay Red   | 727 Maroon  |
|  |  |  |
| 722 Tidal Wave  | 731 Denim   | 720 Pep Rally   |
|  |  |  |
| 707 Marine Blue   | 717 Grand Slam  | 719 Jersey  |
|  |  |  |
| 705 Green Mist  | 735 Basil   | 704 Evergreen   |



Colors shown are an approximate representation of the actual color. Hallowell reserves the right to modify it's designs and/or make changes in specifications or colors without prior notice. In the interest of safety, all Hallowell lockers must be securely anchored to the floor and/or wall.



**Hallowell®**

