



Order From:
Dick Jones Sales, Inc.
P.O. Box 141
Hanover, PA 17331
Phone: 800-441-9955
Email: dickjones@dickjonessales.com

**Tank Tops
New Sizes
Available!**



TANK TOP LIFT PLATFORM • PAGE 17

ROLLING SAFETY LADDERS • PERSONNEL LIFTS • WORK PLATFORMS • CARTS



BALLYMORE

ELEVATION THROUGH INNOVATION

MORE PRODUCTS = MORE SOLUTIONS



STEEL ROLLING LADDERS • PAGE 6

Celebrating 75 Years



PORTABLE LOADING DOCK • PAGE 24



LOCK-N-STOCK • PAGE 5



**MORE
LITHIUM
POWERED
Products**

PALLET PRODUCTS • PAGES 26-29



CANTILEVERS • PAGE 17



ELEVATION INNOVATION AND SERVICE

SINCE 1945

when Ballymore began manufacturing rolling safety ladders we've been committed to quality construction, innovative product development and customer service.



Coatesville, PA
Manufacturing & Custom
Product Development Facility

TODAY

we build upon our 75 year history of growth with the addition of our third, state of the art manufacturing facility and Inventory/Parts Center in Coatesville, Pennsylvania.



Coatesville, PA
Waverly

IN ADDITION

to our new facilities, we have added robotics to continue to support our customer's growing demands; while offering the most competitive lead times, with the best quality and service.



WHY BALLYMORE?

EVEN MORE PRODUCTS

MORE **PATENTED** VERTICAL ACCESS INNOVATIONS

• **Weight Actuated Lockstep**

The safest, most durable Lockstep on the market today. Allows ladder to lock to the floor when 70 lbs. is applied to any of the steps. Prevents workers from hopping over the bottom step and rolling the ladder while they are on it, or have co-workers push them around. The preferred lock step of many Loss Prevention professionals.

• **Boxed Ladders & Platforms**

Patented ladder & work platform designs ship, stack & store in a box.

- Minimizes Risk of Freight Damage
- Lowers shipping costs
- Boxes stack easily allowing cost effective stocking of ladders

• **Power Stocker Lift**

Patented manually propelled and driveable hydraulic order picker with optional sensing system that creates a safety zone around the lift alerting the operator of activity below the lift

• **Pallet Products** * See page 28 for new sizes

Nine of the most popular pallet stackers and trucks on the market

REPLACEABLE COMPONENTS

Extend ladder life with replaceable locksteps, handrails, base frames & rear verticals. Most parts ship by UPS so your ladders can be back in service quickly.

HEAVY DUTY CONSTRUCTION AND BETTER COMPONENTS

• **Deeper Top Steps**

All ladders 5 steps and above feature a 14" Deep Top Step, compared to competitor's 10" deep top step.

• **High Quality Casters**

Ballymore ladders roll on the best casters in the industry, featuring poly tread, ball bearings, and dust covers

• **Dual Lockstep Pedals**

Our standard lockstep has two release pedals for increased convenience. Some competitor's offer a single pedal only.

• **Heavy Duty Construction**

The base frame and rear verticals of our Monster Line, Heavy Duty Slope Ladder series, Cantilever Ladders and Work Platforms are designed with heavy duty 2" x 1" rectangular tubing.

MORE SAVINGS

BALLYMORE'S PATENTED LADDER IN A BOX

- **LOWERS SHIPPING COSTS**
- **MINIMIZES THE RISK OF FREIGHT DAMAGE**
- **BOXES STACK EASILY**

allowing cost effective stocking of ladders

TABLE OF CONTENTS

How to Select the Right Ladder.....	4
Standard Rolling Ladder	5
Lock-N-Stock Folding Ladder	5
M-2000 Rolling Ladder	6
All Directional Ladder	7
Navigator All Directional Ladder.....	7
Stairway Slope Ladders.....	8
Replacement Parts	8
Extra Heavy Duty Monster Line Ladder.....	9
Stock Picking Ladder.....	9
Weight Actuated Lockstep Ladder	10-11
Tilt & Roll Ladder.....	12
Fold-N-Store Ladder	12
Mobile Work Platform	13
Adjustable Height Work Platform.....	14
Fork Deck Platforms	14
Truck/Dock Ladders	14
Aluminum Ladders.....	15
Aluminum Lock-N-Stock.....	15
Wheel Barrow Ladders	15
Stainless Steel Ladder.....	16
Cantilever Series Ladder	17
Tank Top Adj. Work Platform.....	17
PowerStocker Lifts	19
Mini Scissor Lift.....	20
Merchandise Lift	20
Drivable Scissor Lifts	21
Vertical Mast Lifts	22
BallyLift Adj. Work Platform	23
MR Maintenance Lift.....	23
Portable Loading Dock	24
Pallet Stackers.....	26-27
Pallet Trucks	28-29
Industrial Crossover Platforms.....	29
Thin Line Ladder	30
Carts	30
Custom Vertical Access Solutions	31
Policies and Warranties	31

EXPANDED CUSTOM SOLUTION CAPABILITY


Ballymore engineers & manufactures custom vertical access solutions for customers with unique or custom requirements. Don't see exactly what you need for your application?





SELECTING THE RIGHT ROLLING LADDER

What to consider when selecting the proper ladder for your application.

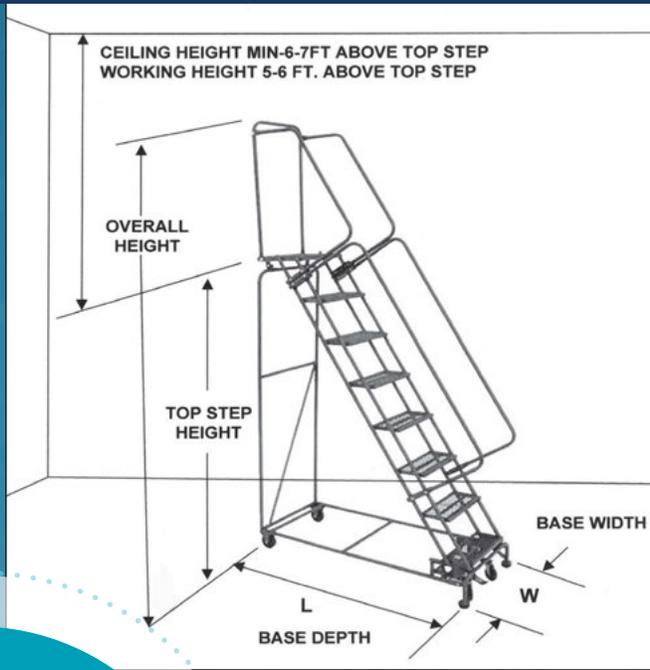

Size Considerations

- Select Platform Height, also known as Top Step Height, based on operations to be performed.
- Platform Height is where the user generally stands. Make sure you have minimum clearance of 6 to 7 feet from the ceiling or any object suspended from the ceiling to insure the user has room to stand safely.
- Maintain maximum working height of 5 feet to 6 feet above the platform height.
- For larger ladders, choose a wide ladder over a narrow one if space permits. For bulky loads, consider a stairway slope ladder and/or deeper top step.

MORE SAVINGS

BALLYMORE'S PATENTED LADDER IN A BOX

- LOWERS SHIPPING COSTS
- MINIMIZES THE RISK OF FREIGHT DAMAGE
- BOXES STACK EASILY
allowing cost effective stocking of ladders



Patent No.:
US 7,828,115 B2



Weight Actuated Lockstep Ladder



Standard Lockstep Ladder



Spring Loaded Caster Ladder

Locking Mechanisms

- **Weight Actuated Lock Step:** This Patented state of the art lock step automatically actuates when 70 lbs. of weight is applied to the stair section. It is the safest and most durable lock step on the market today.
- **Standard Lock Step Ladder:** Ideal for applications 5 steps and above. These ladders are raised into the rolling position when the lock step is actuated. Releasing the lock step drops the ladder into the climbing position with the feet firmly on the floor.
- **Spring-loaded Casters:** Ideal for shorter ladders with 5 steps or less. On this style ladder, the wheels retract under the user's weight securing the ladder safely to the floor.

Climbing Position

The rolling ladder is designed for the worker to face the steps when climbing or descending.

“Stairway Slope” ladders offer a more gradual 50 degree slope, which may be preferable when carrying heavy or bulky items up or down a ladder.

Material Type

- **Steel:** For all around general purpose.
- **Stainless:** For corrosive environment as well as outdoor use.
- **Aluminum:** Like Stainless they are corrosion resistant but approximately 1/3 the weight of steel or stainless.

TREAD SELECTION GUIDE



Abrasive Mat Tread (R): Provides non-slip footing for safe climbing. Perfect for clean retail or office environments.



Perforated Tread (P): Excellent slip resistance. Used extensively in retail and storeroom applications.



Expanded Metal Tread (X): This aggressive self-cleaning tread is ideal for the warehouse or retail floor & allows debris to fall through the tread



Serrated Tread (G): This most aggressive tread is ideal for the shop floor or any industrial application where maximum slip resistance is required.

STANDARD ROLLING LADDERS WITH SPRING LOADED CASTERS

- 450 lb. capacity • Working heights up to 12'
- Spring loaded swivel casters retract under user's weight
- 7" deep steps with 10" deep top step on 1 - 4 step models shown with (*) in the chart below
- 14" deep top step on 4 - 7 step FSH models
- **Specify tread type when ordering**
- 1 - 4 step ladders (*) ship unassembled in a box, and are eligible for UPS shipping
- 4 - 7 step FSH models ship unassembled
- Specify set-up (SU) if required***
- Available in all welded construction
- Gray powder coat finish
- Built to OSHA and ANSI standards
- CAL OSHA available



FSH526X

STEPS INCLUDING TOP STEP	HEIGHT INCHES		16" WIDE STEP			24" WIDE STEP		
	TOP STEP	OVER ALL	MODEL #	BASE W" x L"	WGT Lbs.	MODEL #	BASE W" x L"	WGT Lbs.
NO HANDRAILS								
1 STEP	12	12	118*	18 x 16	18	126*	26 x 16	20
2 STEP	19	19	218*	20 x 19	22	226*	30 x 19	28
3 STEP	28.5	28.5	318*	20 x 25	31	326*	30 x 25	36
4 STEP	38	38	418*	20 x 31	42	426*	30 x 31	51
WITH HANDRAILS								
2 STEP	19	49	*H218♦	20 x 19	36	*H226♦	30 x 19	42
3 STEP	28.5	58.5	*H318♦	20 x 25	45	*H326♦	30 x 25	50
4 STEP	38	68	*H418♦	20 x 31	56	*H426♦	30 x 31	65
4 STEP	40	73	FSH418	20 x 35	68	FSH426	30 x 35	80
5 STEP	50	83	FSH518	20 x 42	75	FSH526	30 x 42	87
6 STEP	60	93	FSH618	24 x 49	83	FSH626	30 x 49	98
7 STEP	70	103	FSH718	24 x 56	89	FSH726	30 x 56	108

*Eligible for UPS ♦ Handrails may ship in separate box

LOCK-N-STOCK AND NEW MODIFIED LOCK-N-STOCK

Both the Lock-N-Stock and new Modified Lock-N-Stock have a 58° slope and 7" Deep Steps. Our Standard Lock-N-Stock has 7" Deep Top Step where as our Modified Lock-N-Stock has a 10" Deep Top Step. Our Standard Lock-N-Stock has 22" high handles where as our Modified Lock-N-Stock has 30" handrails along with a rear guard rail.

MODEL NUMBER	STEPS INCLUDING TOP STEP	TOP STEP HEIGHT	WEIGHT LBS.	OPEN WIDTH & LENGTH	FOLDED SIZE	SHIPS UPS (Oversize)
LS2247	2 STEP	19"	36 lbs.	24 x 17	10 x 24 x 41	YES
LS3247	3 STEP	28.5"	44 lbs.	24 x 23	10 x 24 x 52	YES
LS4247	4 STEP	38"	51 lbs.	24 x 30	10 x 24 x 65	YES*
LS32410	3 STEP	28.5"	46 lbs.	24 x 28	14 x 24 x 62	YES*
LS42410	4 STEP	38"	52 lbs.	24 x 35	14 x 24 x 73	YES*

Now Available in Aluminum See Page 15 *Climb it, Roll it, Fold it & Store it!*

• Heavy duty rated for 350 lbs.

- Welded construction
- 16" wide perforated steps
- Standard Lock-n-Stock folds to approx. 10" deep, modified Lock-n-Stock folds to approx. 14" deep for easy storage
- Locks in the folded or climbing position
- Easy to maneuver in the open or closed positions
- Blue powder coat finish
- No hinge to break
- Built to ANSI standards



LS3247
LOCK-N-STOCK



LS42410
MODIFIED LOCK-N-STOCK



COMING SOON
THE 450 LB CAPACITY
LOCK N STOCK





M-2000 SERIES ROLLING SAFETY LADDERS

- 450 LB. CAPACITY
- Easy to use foot-pedal activated lockstep
- High quality casters with bearing and dust cover
- 14" deep top step
- Ships unassembled for freight savings
- Available fully assembled, specify (SU) set-up
- Specify tread type when ordering
- Rigid 1" OD tubing
- 30" high handrails
- 21" & 28" deep top step available (see below)
- Available with rear guardrail removed for walk through
- Gray powder coat finish
- Built to OSHA and ANSI standards
- CAL OSHA available



14" DEEP TOP STEP

POWDER COATED TOUGH™

Ballymore's Component Design with Replaceable Parts!

EXTEND LADDER LIFE AND UTILITY. LOCKSTEPS, HANDRAILS, BASE FRAMES AND REAR VERTICALS CAN BE REPLACED.

# OF STEPS INCLUDING TOP STEP	HEIGHT INCHES		MODEL #	BASE W" x L"	WGT Lbs.
	TOP STEP	OVER ALL			
16" WIDE STEP WITH 24" WIDE BASE					
5 STEP	50"	83"	052414	24 x 43	91
6 STEP	60"	93"	062414	24 x 49	100
7 STEP	70"	103"	072414	24 x 55	109
8 STEP	80"	113"	082414	24 x 61	127
24" WIDE STEP WITH 32" - 40" WIDE BASE					
5 STEP	50"	83"	053214	32 x 43	110
6 STEP	60"	93"	063214	32 x 49	122
7 STEP	70"	103"	073214	32 x 55	143
8 STEP	80"	113"	083214	32 x 61	160
9 STEP	90"	123"	093214	32 x 68	175
10 STEP	100"	133"	103214	32 x 74	193
11 STEP	110"	143"	113214	32 x 80	205
12 STEP	120"	153"	123214	32 x 87	220
13 STEP*	130"	175"	134014	40 x 94	250
14 STEP*	140"	185"	144014	40 x 100	280
15 STEP*	150"	195"	154014	40 x 106	310

*Must be skidded. See price sheet for skidding cost.

Specify Tread Type when ordering



Abrasive Mat Tread (R)



Perforated Tread (P)



Expanded Metal Tread (X)



Heavy Duty Serrated Grating (G)

M-2000 SERIES DEEP TOP STEP LADDERS

- 450 LB. CAPACITY
- All features of the standard M-2000 line with a 21" or 28" Deep Top Step to provide a larger and more comfortable work space
- Available with rear guardrail removed for walk through
- Side exit available on 28" deep top step models



21" OR 28" DEEP TOP STEP

POWDER COATED TOUGH™

Features choice of 21" or 28" deep top step

# OF STEPS INCLUDING TOP STEP	HEIGHT INCHES		21" DEEP TOP STEP			28" DEEP TOP STEP		
	TOP STEP	OVER ALL	MODEL #	BASE W" x L"	WGT Lbs.	MODEL #	BASE W" x L"	WGT Lbs.
16" WIDE STEP 24" WIDE BASE								
5 STEP	50	83	052421	24 x 50	102	052428	24 x 57	113
6 STEP	60	93	062421	24 x 56	111	062428	24 x 63	122
7 STEP	70	103	072421	24 x 62	120	072428	24 x 69	131
8 STEP	80	113	082421	24 x 68	138	082428	24 x 75	149
24" WIDE STEP 32" - 40" W BASE								
5 STEP	50	83	053221	32 x 50	121	053228	32 x 57	132
6 STEP	60	93	063221	32 x 56	133	063228	32 x 63	144
7 STEP	70	103	073221	32 x 62	154	073228	32 x 69	165
8 STEP	80	113	083221	32 x 68	171	083228	32 x 75	182
9 STEP	90	123	093221	32 x 75	186	093228	32 x 82	197
10 STEP	100	133	103221	32 x 81	204	103228	32 x 88	215
11 STEP	110	143	113221	32 x 87	216	113228	32 x 94	227
12 STEP	120	153	123221	32 x 94	231	123228	32 x 101	242
13 STEP*	130	175	134021	40 x 101	261	134028	40 x 108	272
14 STEP*	140	185	144021	40 x 107	291	144028	40 x 115	302
15 STEP*	150	195	154021	40 x 113	321	154028	40 x 120	332

MOVES Laterally TO FIT IN TIGHT CORNERS AND CLOSE TO SHELVES

# OF STEPS INCLUDING TOP STEP	HEIGHT INCHES		MODEL #	BASE W" x L"	WGT Lbs.
	TOP STEP	OVER ALL			
16" WIDE STEP					
6 STEP	60	93	PIP-6	24 x 49	110
7 STEP	70	103	PIP-7	24 x 55	125
8 STEP	80	113	PIP-8	24 x 61	140
24" WIDE STEP					
6 STEP	60	93	PIP-6-32	32 x 49	133
7 STEP	70	103	PIP-7-32	32 x 55	154
8 STEP	80	113	PIP-8-32	32 x 61	171
9 STEP	90	123	PIP-9	32 x 68	186
10 STEP	100	133	PIP-10	32 x 74	204
11 STEP	110	143	PIP-11	32 x 80	216
12 STEP	120	153	PIP-12	32 x 87	231



POWDER COATED TOUGH™

14" DEEP TOP STEP

ALL DIRECTION ROLLING LADDERS

- 450 LB. CAPACITY
- Turns in its own radius
- 14" deep top step
- Easy to use foot-pedal activated lockstep
- Gray powder coat finish
- Built to meet or exceed OSHA and ANSI standards
- CAL OSHA available
- SHIPS KD to reduce freight costs
- Available assembled, specify (SU) set-up
- Specify tread type when ordering
- (X) Expanded Metal Standard
- (P) Perforated
- (R) Abrasive Mat
- (G) Heavy Duty Serrated Grating

All-Directional System



Rolls on 4 swivel casters allowing ladders to move in **ALL DIRECTIONS** - even laterally! Rigid rear casters easily transition between floor types.

SHIPS KD IN A BOX:

- Minimizes risk of freight damage
- Lowers shipping costs
- Boxes stack easily allowing cost effective stocking of ladders



Ballymore's Patented Bolt-in Top Step Ladders Ship Boxed!

Designed for Easy & Fast Assembly

Unique Patented Design & Engineering

Easily maneuverable and designed to provide easy access to narrow aisles and tight spaces. A safer option to "A" frame ladders, the Navigator includes handrails and a more gradual climbing slope. The patented weight actuated lockstep gives the ladder a very secure feel when climbing. Designed to provide increased Safety, reducing accidents and worker's compensation claims.

# OF STEPS INCLUDING TOP STEP	Height Inches		MODEL #	BASE W" x L"	WGT Lbs.
	TOP STEP	OVER ALL			
THE NAVIGATOR WITH STANDARD FIXED SIDE RAILS					
7 STEP	70	103	NAV-7RS	26 x 51	160
8 STEP	80	113	NAV-8RS	26 x 57	176
9 STEP	90	123	NAV-9RS	26 x 63	192
10 STEP	100	133	NAV-10RS	26 x 69	210
THE NAVIGATOR WITH FOLDING SIDE RAILS					
9 STEP	90	123	NAV-9RF	26 x 63	192
10 STEP	100	133	NAV-10RF	26 x 69	210

Available in Abrasive Mat Tread

POWDER COATED TOUGH™

Shown with Folding Rails



Navigates Narrow Aisles Easily

THE NAVIGATOR ALL DIRECTION ROLLING LADDER

- 450 LB. CAPACITY
- 14" deep top step
- Available 7-10 Steps
- All Directional maneuverability
- Patented weight actuated lockstep
- Standard fixed rails or folding side rails
- Available in Abrasive Mat Tread
- Ships KD in a box
- Available fully assembled, specify (SU) set-up
- Gray powder coat finish
- Meets OSHA and ANSI;
- CAL OSHA available



50° SLOPE WALK DOWN LADDER

- 450 LB. CAPACITY
- 50° stairway slope allows easier climbing and descent
- Foot pedal activated lockstep
- 14" deep top step standard
- 21" and 28" deep top steps available
- Specify tread type when ordering
- Ships KD for freight savings
- Available fully assembled, specify (SU) set-up
- Available with rear guardrail removed for walk through
- Gray powder coat finish
- Meets OSHA & ANSI standards
- CAL OSHA available

HEAVY DUTY STAIRWAY SLOPE LADDER

- 600 LBS. CAPACITY
- 50° stairway slope allows easier climbing and descent
- 14" deep Top Step for added comfort & safety
- 10" deep intermediate steps
- 21" and 28" deep top steps are available
- Easy operating lockstep secures ladder to the floor
- Gray powder coat finish
- All direction option available
- Available with rear guardrail removed for walk through
- Gray powder coat finish
- Meets OSHA & ANSI standards
- CAL OSHA available

LADDER REPLACEMENT PARTS & OPTIONS



14" DEEP TOP STEP



More Gradual Slope

Available with ALL DIRECTIONAL OPTION

Recommended on all 10, 11 & 12 step models

# OF STEPS INCLUDING TOP STEP	TOP STEP	OVER ALL	MODEL #	BASE W" x L"	WGT Lbs.
16" WIDE STEP					
5 STEP	50"	83"	SW524	24 x 50	96
6 STEP	60"	93"	SW624	24 x 60	109
7 STEP	70"	103"	SW724	24 x 68	122
8 STEP	80"	113"	SW824	24 x 76	135
24" WIDE STEP					
5 STEP	50"	83"	SW532	32 x 50	115
6 STEP	60"	93"	SW632	32 x 60	120
7 STEP	70"	103"	SW732	32 x 68	139
8 STEP	80"	113"	SW832	32 x 76	165
9 STEP	90"	123"	SW932	32 x 85	180
10 STEP	100"	133"	SW1032	32 x 93	200
11 STEP	110"	143"	SW1132	32 x 101	210
12 STEP	120"	153"	SW1232	32 x 110	230

AVAILABLE TREAD TYPE OPTIONS:

- (P) Perforated (Standard) (R) Abrasive Mat
(G) Heavy Duty Serrated Grating (X) Expanded Metal



Base Frame & Rear Vertical Rugged 2" X 1" Tubing

21" or 28" DEEP TOP STEP



Available with ALL DIRECTIONAL OPTION

Recommended on all 10, 11 & 12 step models

# OF STEPS INCLUDING TOP STEP	HEIGHT INCHES		MODEL #	BASE W" x L"	WGT Lbs.
	TOP STEP	OVER ALL			
5 STEP	50"	83"	HDS-5	32 x 50	154
6 STEP	60"	93"	HDS-6	32 x 59	185
7 STEP	70"	103"	HDS-7	32 x 67	223
8 STEP	80"	113"	HDS-8	32 x 75	248
9 STEP	90"	123"	HDS-9	32 x 84	278
10 STEP	100"	133"	HDS-10	32 x 92	306
11 STEP	110"	143"	HDS-11	32 x 101	348
12 STEP	120"	153"	HDS-12	32 x 109	371



AVAILABLE TREAD TYPES:

- (P) Perforated (Standard)
(G) Heavy Duty Serrated Grating
(R) Abrasive Mat
(X) Expanded Metal

PLEASE SPECIFY WHEN ORDERING

Optional Replaceable SKID PLATE FOR ROUGH SURFACES

Ladder Shelves & Trays

- Hanging Shelf
- Hanging Tray

PART #	DESCRIPTION	# PER SET
*PR-2	2" Replacement Casters Sets	4
*PR-3	3" Replacement Casters Sets	4
PS	Replacement Springs	4
PTHDS	Replacement Rubber Tips	4
SBR-4	4" Replacement Casters Sets	4
FW-2	10" Rubber Wheels	2
DONUTS	2.5" Donut Style Pads	2

Rear Exit or Side Exit Available

- 28" deep top step required for Side Exit
- Confirm freight classification & packing charge
- Not available on ladders with spring loaded casters
- See price list for cost

*Must specify # of steps and width (Set includes casters, springs, rubber tips and hardware)

Monster Line Rolling Safety Ladder • Most Heavy-Duty Rolling Ladder in the Industry

# OF STEPS INCLUDING TOP STEP	HEIGHT INCHES		MODEL #	BASE W" x L"	WGT Lbs.
	TOP STEP	OVER ALL			
6 STEP	60"	93"	ML063221	32" x 53"	165
7 STEP	70"	103"	ML073221	32" x 59"	189
8 STEP	80"	113"	ML083221	32" x 66"	209
9 STEP	90"	123"	ML093221	32" x 72"	227
10 STEP	100"	133"	ML103221	32" x 78"	248
11 STEP	110"	143"	ML113221	32" x 84"	263
12 STEP	120"	153"	ML123221	32" x 90"	281
13 STEP	130"	175"	ML134021	40" x 96"	314
14 STEP	140"	185"	ML144021	40" x 102"	347
15 STEP	150"	195"	ML154021	40" x 108"	380



Base Frame & Rear Vertical Rugged 2" X 1" Tubing

21" DEEP TOP STEP



Base Frame & Rear Vertical Rugged 2" x 1" Rectangular Tubing • 21" Deep Top Step Standard • Patented Weight Actuated Lockstep Specify tread when ordering.



Perforated Tread (P)



Expanded Metal Tread (X)



Heavy Duty Serrated Grating (G)

EXTEND LADDER LIFE AND UTILITY. Locksteps, handrails, base frames & rear verticals can be replaced. Many parts ship by UPS so your ladders can be back in service quickly.

Ballymore's Component Design with Replaceable Parts!

# OF STEPS INCLUDING TOP STEP	Height Inches		MODEL #	BASE W" x L"	WGT Lbs.
	TOP STEP	OVER ALL			
16" WIDE TREAD 14" Deep Top Step					
6 STEP	60	93	SPL-6-14N	24 x 49	80
7 STEP	70	103	SPL-7-14N	24 x 55	89
8 STEP	80	113	SPL-8-14N	24 x 61	120
16" WIDE TREAD 21" Deep Top Step					
6 STEP	60	93	SPL-6-N	24 x 56	91
7 STEP	70	103	SPL-7-N	24 x 63	100
8 STEP	80	113	SPL-8-N	24 x 68	131
24" WIDE TREAD 14" Deep Top Step					
6 STEP	60	93	SPL-6-14	32 x 49	150
7 STEP	70	103	SPL-7-14	32 x 55	166
8 STEP	80	113	SPL-8-14	32 x 61	205
9 STEP	90	123	SPL-9-14	32 x 68	215
10 STEP	100	133	SPL-10-14	32 x 74	225
11 STEP	110	143	SPL-11-14	32 x 80	235
12 STEP	120	153	SPL-12-14	32 x 87	250
24" WIDE TREAD 21" Deep Top Step					
6 STEP	60	93	SPL-6	32 x 56	160
7 STEP	70	103	SPL-7	32 x 63	176
8 STEP	80	113	SPL-8	32 x 68	215
9 STEP	90	123	SPL-9	32 x 76	225
10 STEP	100	133	SPL-10	32 x 82	235
11 STEP	110	143	SPL-11	32 x 87	245
12 STEP	120	153	SPL-12	32 x 94	260



Combines the benefits of a rolling safety ladder and a stock-picking cart!



PLEASE SPECIFY TREAD TYPE WHEN ORDERING LADDERS

MONSTER LINE LADDERS

Extra Heavy Duty 600 Lb. Capacity!

- Patented Weight Actuated Lockstep
- Rugged 2" x 1" Rectangular tubing base frame and rear vertical
- 21" deep top step
- 59 degree slope
- 24" wide steps standard
- High quality non marking wheels w/roller bearings and dust cover
- Rear corner bumpers - standard
- All-Directional option available
- Gray powder coat finish
- Available w/o rear guard - rail for easy walk through
- Exceeds OSHA & ANSI standards
- CAL OSHA available
- Certified in Canada

STOCK PICKING ROLLING LADDERS

- **COMBINED 600 LBS. CAPACITY**
- 450 lbs. Max for ladder
- 300 lbs. Max for shelves
- Combines the benefits of a rolling safety ladder and a stock-picking cart
- 16" or 24" wide steps
- 14" or 21" deep top step
- Sturdy Stock Shelves:
 - 2 shelves on 6 - 7 step models
 - 3 shelves on 8 - 12 step models
- Specify Tread Type when Ordering Ladders
- Gray powder coat finish
- CAL OSHA available
- Ships unassembled & boxed to reduce freight costs
- Built to OSHA & ANSI standards



PATENTED WEIGHT ACTUATED LOCKSTEP LADDERS

Features:

- **450 LB. CAPACITY**
- This state of the art lockstep has one pedal which lifts the ladder into the rolling position
- As you climb the ladder your weight activates the lockstep - securing the ladder to the floor in the climbing position
- Available in 59° Ladder Slope or 50° Stairway Slope
- 14" deep top step standard 21" and 28" available
- Durable: manufactured with 1" OD tubing
- Built to OSHA and ANSI standards
- Gray powder coat finish
- CAL OSHA available



14" DEEP TOP STEP



59° Slope Ladder



Think Safety... Buy Weight Actuated. The Patented Lockstep from Ballymore

# OF STEPS INCLUDING TOP STEP	HEIGHT INCHES		MODEL #	BASE W" x L"	WGT Lbs.
	TOP STEP	OVER ALL			
16" WIDE STEP					
5 STEP	50"	83"	WA052414	24 x 43	91
6 STEP	60"	93"	WA062414	24 x 49	100
7 STEP	70"	103"	WA072414	24 x 55	109
8 STEP	80"	113"	WA082414	24 x 61	127
24" WIDE STEP					
5 STEP	50"	83"	WA053214	32 x 43	110
6 STEP	60"	93"	WA063214	32 x 49	122
7 STEP	70"	103"	WA073214	32 x 55	143
8 STEP	80"	113"	WA083214	32 x 61	160
9 STEP	90"	123"	WA093214	32 x 68	175
10 STEP	100"	133"	WA103214	32 x 74	193
11 STEP	110"	143"	WA113214	32 x 80	205
12 STEP	120"	153"	WA123214	32 x 87	220
13 STEP	130"	175"	WA134014	40 x 94	250
14 STEP	140"	185"	WA144014	40 x 100	280
15 STEP	150"	195"	WA154014	40 x 106	310

SPECIFY TREAD TYPE WHEN ORDERING:



Perforated Tread (P)



Expanded Metal Tread (X)



Heavy Duty Serrated Grating (G)



Abrasive Mat Tread (R)

PATENTED WEIGHT ACTUATED LOCKSTEP



THE MOST DURABLE LOCK STEP ON THE MARKET TODAY!

Designed using finite element analysis, then robotically tested. Prototypes achieved over 60,000 cycles before replacing latch hook. **Then 60,000 more cycles!**



Apply 70 pounds of pressure to the steps & the ladder automatically drops the front feet to the ground securing the ladder to the floor for safe climbing.



Single pedal easily lifts ladder into the rolling position.

Patent No.: US 7,841,447 B2

BUY WEIGHT ACTUATED FOR INCREASED SAFETY AND STABILITY

ANOTHER EXCLUSIVE BALLYMORE INNOVATION:

Ballymore engineered its patented weight actuated lock step to provide an easy, safe and reliable mechanism to secure rolling ladders to the floor to ensure safe climbing and descent. Ladders equipped with our weight actuated lockstep lock

to the ground when worker steps on any step of the ladder and applies just 70 lbs of pressure. The weight actuated lockstep is designed to prevent accidents caused by a ladder being rolled or moved while another worker is on the top platform.

WHEN SAFETY COUNTS, COUNT ON BALLYMORE.

Weight Actuated Lockstep combined with All Directional Maneuverability

# OF STEPS INCLUDING TOP STEP	Height Inches		MODEL #	BASE W" x L"	WGT Lbs.
	TOP STEP	OVER ALL			
16" WIDE STEP					
5 STEP	50"	83"	WA-AD-052414	24 x 43	91
6 STEP	60"	93"	WA-AD-062414	24 x 49	110
7 STEP	70"	103"	WA-AD-072414	24 x 55	125
8 STEP	80"	113"	WA-AD-082414	24 x 61	140
24" WIDE STEP					
5 STEP	50"	83"	WA-AD-053214	32 x 43	110
6 STEP	60"	93"	WA-AD-063214	32 x 49	133
7 STEP	70"	103"	WA-AD-073214	32 x 55	154
8 STEP	80"	113"	WA-AD-083214	32 x 61	171
9 STEP	90"	123"	WA-AD-093214	32 x 68	186
10 STEP	100"	133"	WA-AD-103214	32 x 74	204
11 STEP	110"	143"	WA-AD-113214	32 x 80	216
12 STEP	120"	153"	WA-AD-123214	32 x 87	231
13 STEP	130"	175"	WA-AD-134014	40 x 94	250
14 STEP	140"	185"	WA-AD-144014	40 x 100	280
15 STEP	150"	195"	WA-AD-154014	40 x 106	310



POWDER COATED TOUGH™

14" DEEP TOP STEP



59° Slope Ladder

Patent No.: US 7,841,447 B2

SPECIFY TREAD TYPE WHEN ORDERING:

- (P) Perforated
- (X) Expanded Metal
- (G) Heavy Duty Serrated Grating
- (R) Abrasive Mat

All-Directional Caster System



Weight Actuated Lockstep



# OF STEPS INCLUDING TOP STEP	Height Inches		All Directional MODEL #	BASE W" x L"	WGT Lbs.
	TOP STEP	OVER ALL			
16" WIDE STEP					
5 STEP	50"	83"	WA-AD-SW-052414	24 x 50	96
6 STEP	60"	93"	WA-AD-SW-062414	24 x 60	109
7 STEP	70"	103"	WA-AD-SW-072414	24 x 68	122
8 STEP	80"	113"	WA-AD-SW-082414	24 x 76	135
24" WIDE STEP					
5 STEP	50"	83"	WA-AD-SW-053214	32 x 50	115
6 STEP	60"	93"	WA-AD-SW-063214	32 x 60	120
7 STEP	70"	103"	WA-AD-SW-073214	32 x 68	139
8 STEP	80"	113"	WA-AD-SW-083214	32 x 76	165
9 STEP	90"	123"	WA-AD-SW-093214	32 x 85	180
10 STEP	100"	133"	WA-AD-SW-103214	32 x 92	200
11 STEP	110"	143"	WA-AD-SW-113214	32 x 101	210
12 STEP	120"	153"	WA-AD-SW-123214	32 x 110	230


SPECIFY TREAD TYPE WHEN ORDERING:

- (P) Perforated
- (X) Expanded Metal
- (G) Heavy Duty Serrated Grating
- (R) Abrasive Mat

POWDER COATED TOUGH™

14" DEEP TOP STEP

50° Stairway Slope allows easier climbing and descent.

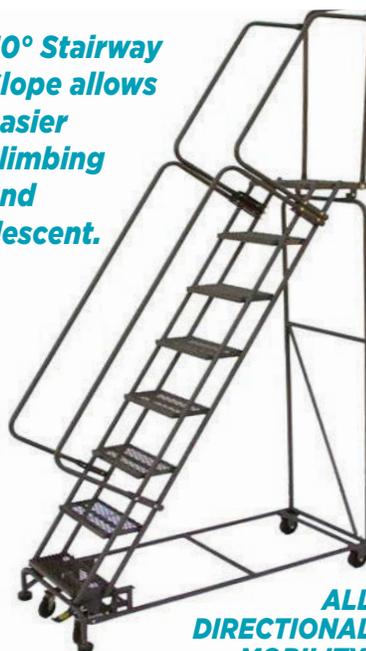

ALL DIRECTIONAL MOBILITY!

WEIGHT ACTUATED ALL DIRECTION LOCKSTEP LADDERS

- 450 LB. CAPACITY!
- Patented lockstep - most durable in the industry, with All Direction Option
- Rolls on 4 swivel casters allowing ladder to move in all directions
- Your weight activates lockstep, locking ladder to the floor in the climbing position
- Standard 14" deep top step, 21" & 28" top step available
- Durable 1" O.D. steel tubing
- Gray powder coat finish
- Built to meet OSHA and ANSI standards
- CAL OSHA available

WEIGHT ACTUATED 50° STAIRWAY SLOPE OPTION LOCKSTEP LADDERS

- 450 LB. CAPACITY
- Patented lockstep - most durable in the industry
- Your weight activates the lockstep as you climb, locking ladder to the floor in the climbing position
- 50° stairway slope allows easier climbing and descent
- Standard 14" deep top step, 21" & 28" top step available
- Durable 1" O.D. steel tubing
- Gray powder coat finish
- Available w/Rear Guard rail removed for easy walk through
- OSHA and ANSI standards
- CAL OSHA available



TILT & ROLL LADDERS

- 450 LB. CAPACITY
- Balanced design allows ladder to tilt easily and roll effortlessly on two 4" wheels
- 16" or 24" wide steps
- Specify tread type when ordering
- Ships unassembled in a box
- Fully assembled ladders available - specify (SU)
- Gray powder coat finish
- Built to OSHA and ANSI Standards



Non Straddle Base
Model #TR-4

Straddle Base
Model #HL-4

# OF STEPS INCLUDING TOP STEP	Height Inches		TILT & ROLL MODEL #	BASE W" x L"	WEIGHT Lbs.	Extra Features
	TOP STEP	OVER ALL				
TR-24" WIDE STEP						
2 STEP	20	53	TR-2	30 x 34	60	
3 STEP	30	63	TR-3	30 x 40	73	WITH TR 20" DEEP TOP STEP
4 STEP	40	73	TR-4	30 x 46	88	
5 STEP	50	83	TR-5	30 x 52	102	
6 STEP	60	93	TR-6	30 x 58	117	
HL-24" WIDE STEP						
2 STEP	20	53	HL-2NS	26 x 32	72	
3 STEP	30	63	HL-3NS	26 x 38	84	WITH STRADDLE BASE
4 STEP	40	73	HL-4NS	26 x 44	96	
5 STEP	50	83	HL-5NS	26 x 50	108	
6 STEP	60	93	HL-6NS	26 x 56	128	
16" WIDE STEP						
2 STEP	19	49	H218TR	20 x 24	36	
3 STEP	28.5	58.5	H318TR	20 x 30	45	ALL WELDED CONSTRUCTION
4 STEP	38	68	H418TR	20 x 36	56	
24" WIDE STEP						
2 STEP	19	49	H226TR	30 x 24	42	10" DEEP TOP STEP
3 STEP	28.5	58.5	H326TR	30 x 30	50	
4 STEP	38	68	H426TR	30 x 36	65	
16" WIDE STEP						
4 STEP	40	73	FSTR418	20 x 40	68	
5 STEP	50	83	FSTR518	20 x 47	75	SHIPS BOXED UNASSEMBLED
6 STEP	60	93	FSTR618	24 x 54	83	
TR-24" WIDE STEP						
4 STEP	40	73	FSTR426	30 x 40	80	14" DEEP TOP STEP
5 STEP	50	83	FSTR526	30 x 47	87	
6 STEP	60	93	FSTR626	30 x 54	98	

BALANCED DESIGN EASILY TILTS AND ROLLS



SHIPS BOXED

- Lowers shipping costs
- Minimizes freight damage risk
- Boxes stack easily allowing cost effective stocking of ladders

SPECIFY TREAD TYPE WHEN ORDERING:

- (X) Expanded Metal
- (P) Perforated
- (G) Heavy Duty Serrated Grating

FOLD & STORE LADDERS

- 350 LB. CAPACITY
- Can be easily folded for storage or transportation
- Tilt and roll mobility
- Large 10" rubber wheels roll easily on rough surfaces
- 14" deep top step
- Ships un-assembled
- Tools required to fold
- Built to OSHA and ANSI standards



14" DEEP TOP STEP

• 30" HIGH HAND RAILS

• 16" WIDE TREADS

MODEL #FAWL-6



Optional Replaceable SKID PLATE FOR ROUGH SURFACES

# OF STEPS INCLUDING TOP STEP	HEIGHT INCHES		MODEL #	BASE W" x L"	WGT Lbs.
	TOP STEP	OVER ALL			
5 STEP	50"	83"	FAWL-5	30 x 46	90
6 STEP	60"	93"	FAWL-6	30 x 52	100
7 STEP	70"	103"	FAWL-7	30 x 58	110
8 STEP	80"	113"	FAWL-8	30 x 64	120
9 STEP	90"	123"	FAWL-9	30 x 70	135
10 STEP	100"	133"	FAWL-10	30 x 76	148
11 STEP	110"	143"	FAWL-11	30 x 82	165
12 STEP	120"	153"	FAWL-12	30 x 88	175

SPECIFY TREAD TYPE WHEN ORDERING:

- (X) Expanded Metal
- (P) Perforated
- (G) Heavy Duty Serrated Grating



Can be easily folded for storage or transport. Easy tilt & roll mobility



Heavy Duty Mobile Work Platforms increase productivity by simplifying maintenance operations.

- Designed to accommodate two workers.
- Also available in aluminum and stainless steel.
- **Add platform length to model # when ordering**



POWDER COATED TOUGH™

HEAVY DUTY MOBILE WORK PLATFORMS

- **RUGGED 2" X 1" RECTANGULAR TUBING BASE FRAME & REAR VERTICAL WELDMENT**
- **800 LB. CAPACITY**
- Also available in aluminum and stainless steel
- Sturdy 1" tubular steel rails
- Self cleaning slip resistant serrated grating
- Easy to use heavy duty pedal activated lockstep with large 4" casters
- 36" high handrails with midrail
- Meets OSHA and ANSI requirements
- Gray powder coat finish
- Ships unassembled in a box

SINGLE ENTRY WORK PLATFORMS

MODEL WITHOUT HANDRAILS				36" PLATFORM		48" PLATFORM		60" PLATFORM		72" PLATFORM	
STEPS	PLATFORM HEIGHT	PLATFORM WIDTH	MODEL #	WEIGHT	BASE W" x D"						
3 STEP	30"	24"	SNR3-24	105	33 x 48	127	33 x 60	149	33 x 72	171	33 x 84
3 STEP	30"	36"	SNR3-36	121	38 x 48	143	38 x 60	150	38 x 72	187	38 x 84
4 STEP	40"	24"	SNR4-24	121	33 x 54	143	33 x 66	165	33 x 78	187	33 x 90
4 STEP	40"	36"	SNR4-36	138	38 x 54	160	38 x 66	182	38 x 78	204	38 x 90
MODEL WITH HANDRAILS				36" PLATFORM		48" PLATFORM		60" PLATFORM		72" PLATFORM	
STEPS	PLATFORM HEIGHT	PLATFORM WIDTH	MODEL #	WEIGHT	BASE W" x D"						
3 STEP	30"	24"	SEP3-24	136	33 x 48	151	33 x 60	172	33 x 72	193	33 x 84
3 STEP	30"	36"	SEP3-36	153	38 x 48	178	38 x 60	202	38 x 72	226	38 x 84
4 STEP	40"	24"	SEP4-24	151	33 x 54	165	33 x 66	186	33 x 78	207	33 x 90
4 STEP	40"	36"	SEP4-36	167	38 x 54	193	38 x 66	217	38 x 78	240	38 x 90
5 STEP	50"	24"	SEP5-24	165	33 x 60	178	33 x 72	199	33 x 84	220	33 x 96
5 STEP	50"	36"	SEP5-36	182	38 x 60	206	38 x 72	230	38 x 84	253	38 x 96
6 STEP	60"	24"	SEP6-24	178	33 x 66	193	33 x 78	215	33 x 90	237	33 x 102
6 STEP	60"	36"	SEP6-36	198	38 x 66	220	38 x 78	245	38 x 90	270	38 x 102
7 STEP	70"	24"	SEP7-24	193	33 x 73	209	33 x 85	230	33 x 97	251	33 x 108
7 STEP	70"	36"	SEP7-36	215	38 x 73	237	38 x 85	273	38 x 97	308	38 x 108



DOUBLE ENTRY MOBILE WORK PLATFORMS

Extra Heavy Duty 800 Lb. Capacity!

POWDER COATED TOUGH™

MEETS OR EXCEEDS OSHA ANSI REQUIREMENTS

DOUBLE ENTRY WORK PLATFORMS

				36" PLATFORM		48" PLATFORM		60" PLATFORM		72" PLATFORM	
STEPS	PLATFORM HEIGHT	PLATFORM WIDTH	MODEL #	WEIGHT	BASE W" x D"						
3 STEP	30"	24"	DEP3-24	202	33 x 60	220	33 x 72	240	33 x 84	260	33 x 96
3 STEP	30"	36"	DEP3-36	226	38 x 60	242	38 x 72	262	38 x 84	282	38 x 96
4 STEP	40"	24"	DEP4-24	227	33 x 73	245	33 x 85	265	33 x 97	284	33 x 108
4 STEP	40"	36"	DEP4-36	248	38 x 73	264	38 x 85	287	38 x 97	306	38 x 108
5 STEP	50"	24"	DEP5-24	251	33 x 85	271	33 x 97	290	33 x 109	308	33 x 121
5 STEP	50"	36"	DEP5-36	270	38 x 85	292	38 x 97	312	38 x 109	330	38 x 121
6 STEP	60"	24"	DEP6-24	276	33 x 98	295	33 x 110	315	33 x 121	332	33 x 133
6 STEP	60"	36"	DEP6-36	297	38 x 98	314	38 x 110	337	38 x 121	352	38 x 133
7 STEP	70"	24"	DEP7-24	300	33 x 110	319	33 x 122	339	33 x 134	356	33 x 146
7 STEP	70"	36"	DEP7-36	319	38 x 110	341	38 x 122	362	38 x 134	380	38 x 146

AVAILABLE IN STANDARD AND STAIRWAY SLOPE

- **RUGGED 2" X 1" RECTANGULAR TUBING BASE FRAME & REAR VERTICAL WELDMENT**
- **800 LB. CAPACITY**
- Self cleaning slip resistant serrated grating
- Easy to use heavy duty pedal activated lockstep with large 4" casters
- 36" high handrails with midrail
- Meets OSHA and ANSI requirements

HEAVY DUTY ADJUSTABLE HEIGHT STEEL WORK PLATFORMS

- **Heavy Duty 500 lb. Capacity**
- Simply turn feet to adjust height
- Gray Powder Coat Finish
- Slip resistant heavy duty serrated grating
- Place several units together to create larger work areas
- Provide shorter workers with a more comfortable work position
- Heavy duty serrated grating provides excellent slip resistance
- Platforms 24" - 48" long, have 4 legs, longer platforms have 6 legs



HEIGHTS from 5" to 8"			HEIGHTS from 9" to 14"	
MODEL #	W" x L"	Weight	MODEL #	W" x L"
AWP5-2424	24 x 24	38	AWP9-2424	24 x 24
AWP5-2436	24 x 36	52	AWP9-2436	24 x 36
AWP5-2448	24 x 48	66	AWP9-2448	24 x 48
AWP5-2459	24 x 59	80	AWP9-2459	24 x 59
AWP5-2471	24 x 71	106	AWP9-2471	24 x 71
AWP5-2497	24 x 97	138	AWP9-2497	24 x 97

Make Uneven Surfaces Level

FORK DECK MAINTENANCE PLATFORM

- **1,000 lb. CAPACITY**
Turn your fork truck into a personnel lift. Safe and economical access to heights above those reached by rolling ladders.
- CAL OSHA Models Available

Heavy Duty Fork Deck



- Rugged steel construction
- Non-skid platform
- 42" high rails with midrails, 4" toeboards & locking gate
- 60" high screen shields operator from fork lift mast
- Safety chain secures platform to mast
- 2" x 7" fork pockets mounted on 29" centers
- 4" swivel casters on base for easy positioning
- Safety orange powder coat
- Ships boxed, easy assembly

Extra Heavy Duty 1,000 Lb. Capacity!



MODEL	L" X W"	WEIGHT
FD-O-C	36" x 36"	141
FD-48-C	48" x 36"	163
FD-40-48	40" x 48"	171
OPTIONAL ACCESSORIES		
Fluorescent Bulb Caddy		26
Tool Tray (Bolt on or Hang on)		14
All welded available		-

• Ships Boxed for Freight Savings & Quick, Easy Assembly

TRUCK/DOCK ACCESS LADDERS

- **450 lb. CAPACITY**
- Ideal for accessing trucks or loading docks
- 21" deep top step
- 10" rear rubber wheels - Great on parking lots or rough surfaces
- Gray powder coat finish
- Built to OSHA and ANSI standards

- Rugged 2" x 1" rectangular tubing base frame and rear vertical
- Heavy duty serrated grating step tread
- Lightweight - lift and roll wheelbarrow portability
- Available in both 59° ladder slope or gradual 50° stairway slope
- No Rear Guardrail standard for easy walk through (includes snap chain)



LADDER SLOPE 59°					
MODEL #	TOP STEP HEIGHT	OVERALL HEIGHT	STEP WIDTH	BASE W" x L"	WEIGHT LBS.
TA-5-24	50"	80"	24"	32" x 53"	145
TA-5-36	50"	80"	36"	44" x 53"	170
STAIRWAY LADDER SLOPE 50 DEGREE					
SW-TA-5-24	50"	80"	24"	32" x 60"	155
SW-TA-5-36	50"	80"	36"	44" x 60"	180



Corrosion Resistant • Light Weight • Aluminum Rolling Ladders

Aluminum ladders are lightweight, weather resistant, durable & easy to transport, with noncorrosive properties that make them the ideal choice for many applications in both outdoor and indoor environments.

# OF STEPS INCLUDING TOP STEP	Height Inches		SPRING LOADED CASTERS MODEL #	TILT & ROLL MODEL #	BASE W" x L"	WGT Lbs.
	TOP STEP	OVER ALL				
18" WIDE STEPS						
2 STEP NO RAILS	19	19	A2S*	-	20 x 19	15
3 STEP NO RAILS	28.5	28.5	A3S*	-	20 x 25	20
4 STEP NO RAILS	38	38	A4S	-	20 x 31	29
2 STEP	19	49	A2SH	A2SH-TR	20 x 19	21
3 STEP	28.5	58.5	A3SH	A3SH-TR	20 x 25	27
4 STEP	38	68	A4SH	A4SH-TR	20 x 31	34
24" WIDE STEPS						
2 STEP NO RAILS	19	19	A2S30*	-	30 x 19	22
3 STEP NO RAILS	28.5	28.5	A3S30	-	30 x 25	28
4 STEP NO RAILS	38	38	A4S30	-	30 x 31	35
2 STEP	19	49	A2SH30	A2SH30-TR	30 x 19	28
3 STEP	28.5	58.5	A3SH30	A3SH30-TR	30 x 25	34
4 STEP	38	68	A4SH30	A4SH30-TR	30 x 31	41
5 STEP	47.5	77.5	A5SH30	A5SH30-TR	30 x 37	49
6 STEP	57	87	A6SH30	A6SH30-TR	30 x 43	60
7 STEP	66.5	96.5	A7SH30	A7SH30-TR	30 x 49	67



ALUMINUM LADDERS

- 350 LB. CAPACITY
- All welded
- Aluminum mill finish, industrial grade welds
- Ideal for use in banks, libraries & hospitals and wash down applications
- Lightweight design
- Non-magnetic and non-sparking
- Paint-free for food and pharmaceutical applications
- Solid ribbed tread or heavy duty serrated grating
- 10" standard deep top step
- Optional 20" & 30" deep top step
- Built to OSHA & ANSI standards

Specify Tread Type when Ordering:

- Ribbed Tread (R)
- Heavy Duty Serrated Grating (G)

* Eligible for UPS. Tilt and roll casters add 5" to base length.

NOTE: Aluminum ladders are subject to a 50% restocking charge

POPULAR LOCK-N-STOCK - NOW AVAILABLE IN ALUMINUM

The feature is the drastically reduced weight. The benefit is less effort to maneuver the ladder leading to better productivity. Two Versions: a 7" deep top step with 22" high handles and a 10" deep top step with 30" high handles along with a rear guardrail. Lock the ALUMINUM stair section in place and **CLIMB IT- ROLL-IT- FOLD IT AND STORE IT!!**



NEW! ALUMINUM LOCK-N-STOCK

- 300 LB. CAPACITY
- Welded Construction
- Perforated Tread
- No hinge to break
- Easy to maneuver in the open or closed position
- Locks in the folded or climbing position
- Approx 10" deep when folded and 14" deep on 10" deep top step models
- Built to ANSI standards
- Blue powder coat finish

MODEL NUMBER	STEPS INCLUDING TOP STEP	TOP STEP HEIGHT	WEIGHT LBS.	OPEN WIDTH & LENGTH	FOLDED SIZE	COLOR
ALS3247	3	28.5"	23	24 x 23	10 x 24 x 52	BLUE
ALS4247	4	38"	28	24 x 30	10 x 24 x 65	BLUE
ALS32410	3	28.5"	26	24 x 28	14 x 24 x 62	BLUE
ALS42410	4	38"	31	24 x 35	14 x 24 x 73	BLUE

ALUMINUM LIFT & ROLL WHEELBARROW STYLE LADDERS

Features 10" rubber wheels for easy portability even on rough surfaces. 14"-deep top step provides range of motion when working at higher levels. Nonmagnetic, non-sparking & paint-free, aluminum ladders are acceptable for pharmaceutical & food processing industries. Industrial-grade welds allow them to be used in wash-down applications.

SPECIFY TREAD TYPE WHEN ORDERING: Ribbed Tread (R) • Heavy Duty Serrated Grating (G)

STEPS INCLUDING TOP STEP	HEIGHT INCHES			18" WIDE TREAD		24" WIDE TREAD*	
	TOP STEP	OVER ALL	BASE W" X L"	MODEL #	WGT Lbs.	MODEL #	WGT Lbs.
5 STEP	50"	83"	30 x 47	ALWB5	42	ALWB530	50
6 STEP	60"	93"	30 x 53	ALWB6	50	ALWB630	60
7 STEP	70"	103"	30 x 60	ALWB7	58	ALWB730	70
8 STEP	80"	113"	36 x 66	ALWB8	66	ALWB830	80
9 STEP	90"	123"	36 x 72	ALWB9	74	ALWB930	90
10 STEP	100"	133"	36 x 78	ALWB10	82	ALWB1030	100

*Models with 24" wide steps have 36" wide base

14" DEEP TOP STEP



10" RUBBER WHEELS

WHEEL BARROW STYLE ALUMINUM LADDERS

- 300 LB. CAPACITY
- All welded
- 14" deep top step standard
- 10" rear rubber wheels - Great on rough surfaces
- Lightweight lift and roll wheelbarrow portability
- Built to OSHA and ANSI standards

STAINLESS STEEL ROLLING LADDERS

- **450 LB. CAPACITY**
- Ideal for wash down and corrosive environments
- Type T304 Stainless Steel construction
- 1-3 step ladders are all welded and have a 10" deep top step
- 4-12 step ladders have 14" deep top step standard
- Deeper top steps available on all models
- Bead blasted for uniform finish
- Casters for lock step ladders are stainless steel
- Spring Loaded casters are stainless and springs are carbon steel
- Built to OSHA and ANSI standards
- CAL OSHA available

AVAILABLE TREAD TYPES

Please specify when ordering.



Perforated Tread (P)



Heavy Duty Serrated Grating (G)

Note: All stainless ladders are manufactured with industrial grade welds, not recommended for clean rooms.

Stainless Steel Ladders Ideal for Wash Down & Corrosive Environments

SPRING LOADED CASTER MODELS



Spring loaded casters retract under user's weight. Non-marring floor caps grip floor for stable stationary positioning.



TILT & ROLL

shown with optional 20" deep top steps



# OF STEPS INCLUDING TOP STEP	HEIGHT INCHES		SPRING LOADED CASTERS MODEL #	TILT & ROLL MODEL #	BASE W" x L"	WGT Lbs.
	TOP STEP	OVER ALL				
16" WIDE STEPS						
1 STEP NO RAILS	12	12	SS1N*	-	18 x 20	24
2 STEP NO RAILS	19	19	SS2N*	-	20 x 19	28
3 STEP NO RAILS	28.5	28.5	SS3N*	-	20 x 25	35
2 STEP	19	49	SS220	SSTR220	20 x 19	40
3 STEP	28.5	58.5	SS320	SSTR320	20 x 25	46
4 STEP	40	73	SS420	SSTR420	20 x 38	70
5 STEP	50	83	SS520	SSTR520	20 x 44	77
6 STEP	60	93	SS624	SSTR624	24 x 50	81
7 STEP	70	103	SS724	-	24 x 56	95
24" WIDE STEPS						
2 STEP NO RAILS	19	19	SS2N30	-	30 x 19	40
3 STEP NO RAILS	28.5	28.5	SS3N30	-	30 x 25	44
2 STEP	19	49	SS230	SSTR230	30 x 19	43
3 STEP	28.5	58.5	SS330	SSTR330	30 x 25	55
4 STEP	40	73	SS430	SSTR430	30 x 38	85
5 STEP	50	83	SS530	SSTR530	30 x 44	92
6 STEP	60	93	SS630	SSTR630	30 x 50	105
7 STEP	70	103	SS730	-	30 x 56	115

* Eligible for UPS. Tilt and roll casters add 5" to base length

STAINLESS STEEL FOLD-N-STORE LADDERS

are bead-blasted to provide smooth uniform finish and feature 16" wide steps.




FOLD-N-STORE

STEPS INCLUDING TOP STEP	BASE W" x L"	WGT Lbs.	MODEL #
5 STEP	30 x 48	82	SSFAWL-5
6 STEP	30 x 54	92	SSFAWL-6
7 STEP	30 x 60	103	SSFAWL-7
8 STEP	30 x 66	118	SSFAWL-8
9 STEP	30 x 72	133	SSFAWL-9
10 STEP	30 x 78	149	SSFAWL-10
11 STEP	30 x 84	165	SSFAWL-11
12 STEP	30 x 90	180	SSFAWL-12

* Fold-N-Store Capacity = 350 Lbs.

STEPS INCLUDING TOP STEP	HEIGHT INCHES		BASE W" x L"	WGT Lbs.	LOCKSTEP MODEL #
	TOP STEP	OVER ALL			
16" WIDE STEPS					
5 STEP	50"	83"	24 x 46	95	SS052414
6 STEP	60"	93"	24 x 52	105	SS062414
7 STEP	70"	103"	24 x 58	114	SS072414
8 STEP	80"	113"	24 x 64	132	SS082414
24" WIDE STEPS					
5 STEP	50"	83"	32 x 46	113	SS053214
6 STEP	60"	93"	32 x 52	126	SS063214
7 STEP	70"	103"	32 x 58	147	SS073214
8 STEP	80"	113"	32 x 64	165	SS083214
9 STEP	90"	123"	32 x 70	180	SS093214
10 STEP	100"	133"	32 x 76	199	SS103214
11 STEP	110"	143"	32 x 82	211	SS113214
12 STEP	120"	153"	32 x 88	227	SS123214

Lockstep Ladder shown with perforated tread Built to OSHA and ANSI

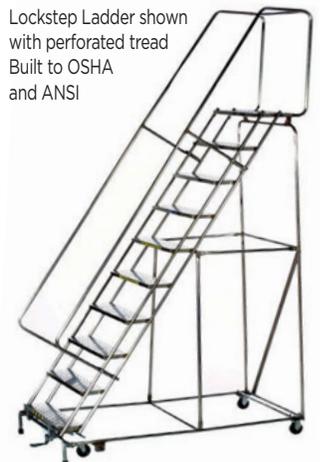

• NOTE: Stainless Steel ladders subject to a 50% restocking charge

Cantilever Ladders • Heavy Duty Construction for Heavy Duty Applications!

The cantilever series of steel rolling ladders by Ballymore is the ideal solution for working or performing maintenance in elevated areas that are difficult to access. The cantilever is designed to be highly maneuverable and engineered for safety. Each cantilever is safety tested to ensure it will provide a safe elevated working environment

MODEL				14" OVERHANG		28" OVERHANG	
STEPS	PLATFORM HEIGHT	VERTICAL CLEARANCE	MODEL #	WEIGHT	BASE W" x D"	WEIGHT	BASE W" x D"
6	60"	57"	CL-6	493	32 x 46	735	32 x 53
7	70"	67"	CL-7	467	32 x 52	695	32 x 52
8	80"	77"	CL-8	437	32 x 58	665	32 x 58
9	90"	87"	CL-9	405	32 x 65	583	32 x 65
10	100"	97"	CL-10	426	32 x 71	554	32 x 71
11	110"	107"	CL-11	430	32 x 77	569	32 x 77
12	120"	117"	CL-12	409	32 x 84	537	32 x 84
13	130"	127"	CL-13	442	40 x 90	520	40 x 90
14	140"	137"	CL-14	475	40 x 96	553	40 x 96
15	150"	147"	CL-15	458	40 x 103	536	40 x 103

MODEL				35" OVERHANG		42" OVERHANG	
STEPS	PLATFORM HEIGHT	VERTICAL CLEARANCE	MODEL #	WEIGHT	BASE W" x D"	WEIGHT	BASE W" x D"
6	60"	57"	CL-6	763	32 x 60	791	32 x 67
7	70"	67"	CL-7	773	32 x 59	801	32 x 66
8	80"	77"	CL-8	779	32 x 58	807	32 x 65
9	90"	87"	CL-9	697	32 x 65	811	32 x 65
10	100"	97"	CL-10	668	32 x 71	782	32 x 71
11	110"	107"	CL-11	633	32 x 77	747	32 x 77
12	120"	117"	CL-12	601	32 x 84	715	32 x 84
13	130"	127"	CL-13	634	40 x 90	698	40 x 90
14	140"	137"	CL-14	617	40 x 96	681	40 x 96
15	150"	147"	CL-15	600	40 x 103	664	40 x 103

Weight is a combination of the ladder and counter weight, does not include skidding, add 120 lbs for packaging.



POWDER COATED TOUGH™

BASE FRAME AND REAR VERTICAL RUGGED 2" x 1"

SPECIAL PURPOSE LADDER AS DEFINED BY ANSI-14.7

CANTILEVER SERIES LADDERS

- **300 LBS. CAPACITY**
Higher weight capacities available - call for details
- 59 degree slope
- Heavy-duty 1" x 2" rectangular frame
- High quality 5" x 2" locking casters
- Available with Rear Guardrail removed for easy walk through
- Powder coat finish
- Ships KD to prevent freight damage and lower freight cost

Add platform overhang length to model number when ordering

Adjustable Height Cantilevered Platforms provide safe access to Tank Trucks, Railroad Cars, Conveyor Systems, Machinery or other applications with limited access.

Shown with optional Safety Orange finish & 30" extension railing



FEATURES:

- 9' to 13' adjustable work height
- Provides easy access to tank trucks, railroad cars & other cantilevered applications
- Great for clearing snow and ice off tops of trailers
- Manually propelled for use on hard level surfaces
- 48" long cantilevered platform
- Hydraulic hand pump raises & lowers cantilevered platform
- Open serrated grating steps and deck tread.
- Slip resistant climbing rungs
- 28"W x 60"L base, fixed outriggers spread to 69"
- Full rails on both sides, gates at each end of platform
- 2 swivel & 2 rigid 8" casters for use on hard surfaces
- Two adjustable stabilizing jacks secure lifts to ground
- Fixed platform height available
- Gray coat finish (Standard)

MANUALLY PROPELLED TANK TOP ADJUSTABLE HEIGHT WORK PLATFORM

- **300 LB. CAPACITY**
- **OPTIONAL ACCESSORIES**
- Tool Tray
- Fluorescent tube holder
- Platform duplex receptacle
- Removable 30" extension rail
- **Safety Orange Powder Coat Optional**
- For outdoor applications primer undercoat and powder coat finish is recommended.

Custom Engineered Vertical Access Solutions Available

SPECIAL PURPOSE LADDER AS DEFINED BY ANSI-14.7

New Sizes Available!

TANK TOP LIFTS

Model Number	Platform Max	Height Min	Platform Length	Platform Width	Underclearance Height	Weight Lbs.
TT-913	13' 8"	9' 4"	48"	24"	Adjustable 9' to 13'	1525
TT-913F	13' 8"	9' 4"	48"	24"	Non-Adjustable 9' to 13'	1450
TT-7-11	11' 8"	7' 4"	48"	24"	Adjustable 7' to 11'	1450
TT-11-15	15' 8"	11' 4"	48"	24"	Adjustable 11' to 15'	1625



BALLYMORE LIFTS!

DRIVING INNOVATION TO NEW HEIGHTS



Ballymore Introduces New Wider Base and Cargo Deck Models

FEATURES:

- PS-12 and PS-15 models now include a larger 24"x32" cargo deck
- 12 volt DC power (AGM battery) with mounted charger included - Easily recharge using a standard 110 volt outlet
- High quality controls requires both hands to operate for safety
- 100+ raise and lower cycles between charges
- Key lock prevents unauthorized use
- Optional sensing system creates a 2' safety zone around lift alerting operator of activity below lift
- Meets or exceeds ANSI safety standards



MANUALLY PROPELLED HYDRAULIC POWER STOCKER LIFTS

- 450 LB. CAPACITY (PS-10)
- 650 LB. CAPACITY (PS-12 AND PS-15)

With this ground entry, manually propelled, hydraulic order picker merchandise can be raised to shelf level and easily slid on or off shelf to minimize lifting, improving productivity and employee safety. It's easy to operate and ideal for retail storerooms and stockrooms.

MODEL #	WORKING HEIGHT	MERCH DECK MAX HEIGHT	FOOTPRINT W" x L"	OVERALL HEIGHT (LOWERED)	POWER	WEIGHT LBS.
PS-10	14'	9'	36" x 54"	76"	12V DC	1040
PS-12*	18'	13'	42" x 54"	94"	12V DC	1134
PS-15*	21'	15'9"	43" x 60"	90"	12V DC	1434

* Available with optional sensing system

Power Stacker's optional sensing system creates a safety zone perimeter around the lift when in the raised position.



The ideal lift for the shop, stock room or retail floor!

No Outriggers Required. Floor Locks Secure Power Stacker Safely in Place!

The New Drivable Power Stacker is NOW AVAILABLE!

Our New Drivable Power Stacker, Model Number PS-12D and new PS-15D has all the ergonomic features and benefits as our push-able models, including ground entry and the ability to raise merchandise to shelf levels while easily sliding the product on or off the shelf. This minimizes the back strains of lifting and at the same time improves productivity and safety.

The Drivable Power Stacker is easy to operate. The control(joy) stick makes navigation simple and safe. The Drivable Power Stackers have two speeds and can be operated in the raised position. They come with a Gate Safety Alarm, Manual Lowering Valve, Warning Lights plus Emergency Stop Buttons- all Standard!

FEATURES:

- Large Cargo Deck 32"(Wide)X 28"(Deep)
- Standing Platform 28"(Wide)X 17"(Deep)
- Power Cord for charging
- Easy charging using standard 110V outlet
- Key Lock prevents unauthorized usage
- Ground and Control Box Operations
- Two Speeds
- Comes in orange or blue
- Manual Lowering Valve
- Saloon door gates at entrance
- Horn
- ANSI Approved



Power Stacker's optional sensing system creates a safety zone perimeter around the lift when in the raised position.



- 650 LB. CAPACITY (Operator & Inventory)

DRIVABLE POWER STOCKER LIFTS

NEW SIZES

HIGHER CAPACITY

MODEL #	WORKING HEIGHT	MERCH DECK MAX HEIGHT	FOOTPRINT W" x L"	OVERALL HEIGHT (LOWERED)	POWER	WEIGHT LBS.
PS-12D*	18'	13'	42"X 60"	96"	2-12V	1600
PS-15D	21'	16'	43"X63"	90"	2-12V	1675

* Available with optional sensing system

MINI SCISSOR LIFT

- **500 LB. CAPACITY**
- Manually Propelled
- Working heights up to 19'
- Maximum raised platform height of 9' 10" to 12' 9"
- 28" x 50" Platforms
- Easy to roll on 6" casters
- 12 Volt DC Powered
- Power Unit stored in a lockable slide out drawer
- Battery charge indicator is included
- Emergency stop button
- Emergency lowering system
- Forklift Pockets
- Meets/exceeds ANSI safety standards



PUSHABLE MODELS

MODEL #	WORKING HEIGHT	PLATFORM MAX.	PLATFORM MIN.	FOOTPRINT W"x L"	OVERALL HEIGHT (Lowered)	WEIGHT (Lbs.)
MSL-10	16'	9' 10"	26"	30" x 57"	77"	1200
MSL-12	19'	12' 9"	26"	30" x 57"	77"	1260

NO OUTRIGGERS REQUIRED!
Floor Locks secure lift safely to the floor.
Small footprint enables easy access to limited access areas



THE MINI MERCHANDISE LIFT (BMML-9)

- **500LB. CAPACITY**
- Base = 26" Wide X 53" Long - (60" overall length including push rails)
- Merchandise Shelf = 25" Wide X 17" Long
- Overall Height = 55"
- Fully Lowered Standing Platform = 13"
- Standing Platform = 23^{1/2}" Wide X 26" deep
- Wheels - 4- 6" diameter
- 2 - 2" Wide Locking Swivels
- 2 - 2" Wide Rigid Wheels
- Shelf Height Maximum = 110"
- Standing Platform Maximum Height = 70"
- Color Yellow
- Power - 12V
- Weight = 840 lbs Approximate
- Shelf Capacity - 150lbs (tested)
- ANSI 92.20

THE MINI MERCHANDISE LIFT

Footprint only 26"W X 53"L
Great for tight aisle ways!

Features

- Shelf Lip to prevent packages from falling off the front of the lift
- Safety Control Panel- 3 button plus Kill Switch
- Manual Lowering Valve
- Limit Switch included. This prevents the lift from ascending without the casters being locked to the floor.
- "Push" handles added to the front and back of the lift for easy maneuverability
- Safety shield to prevent access to internals
- Enlarged Standing Platform for added safety and comfort
- Saloon Door Gate
- Bubble Level
- Meets ANSI Standards

NEW DESIGN



MODEL #BMML-9

POWDER COATED TOUGH™

DISCOVER BALLYMORE'S NEWEST 2 OCCUPANT DRIVABLE SCISSOR LIFTS

INNOVATION DRIVEN TO NEW HEIGHTS



**Featuring
An Extendable
Roll Out Cantilever
Platform**

The roll-out cantilevered platform provides safer access to machinery and equipment.



Gradeability



0° Turn Radius



DRIVABLE SCISSOR LIFTS

Features:

- Extendable Roll-Out Cantilever Platform
- Drivable at full heights
- Self-Locking safety gate
- Emergency Stop Button
- Emergency Lowering System
- Forklift Pockets
- Powder Coat finish
- DMSL-10 & DMSL-12 Maximum Occupants = 1
- Meets or Exceeds ANSI Standards

**NEW
MINI
DRIVABLE
19'**



Model Number	Weight Capacity	Working Height	Platform Height		Platform W x L (Outer Dimension)	Platform Extension	Base W x L	Overall Height	Weight (lbs)	Power - Batteries
			Max	Min						
DMSL-10	500	16'	10'	36"	28" x 50"	22"	30" x 57"	80"	1825	2 - 12V
DMSL-12	500	18'	12'	36"	28" x 50"	22"	30" x 57"	80"	1900	2 - 12V
DMSL-19	500	25'	19'	42"	29" x 66"	36"	30" x 74"	86"	3164	4 - 6V
DMSL-19C	500	25'	19'	42"	28" x 53"	24"	32" x 60"	83"	2733	2-12V
DMSL-26	500	32'	26'	48"	32" x 90"	36"	32" x 98"	92"	4718	4 - 6V
DMSL-26(W)	1000	32'	26'	48"	44" x 90"	36"	46" x 98"	92"	4884	4 - 6V
DSL-32	700	38'	32'	48"	44" x 90"	36"	46" x 98"	96"	5533	4 - 6V
DSL-40	550	46'	40'	58"	44" x 90"	36"	47" x 98"	102"	6834	4 - 12V
DSL-45	500	51'	45'	58"	44" x 104"	36"	55" x 112"	102"	7320	4 - 12V



MOBILE VERTICAL SINGLE PERSON LIFT

- Manually propelled maintenance lift
- Working heights to 35'
- Compact design for easy storage
- 29x56 base allows lift to roll through standard doorways
- Easy to use outriggers extend from base to provide excellent stability
- 12 Volt DC Power (raise and lower)
- ANSI 92.20

Working heights to 35'

NEW DESIGN

300 lb. Capacity



MOBILE VERTICAL LIFT:

This manually propelled lift is designed for one worker and provides access to 35' working heights. Ideal for work on overhead lighting and ceiling maintenance. 12 Volt DC Power with easy to use controls allows the BMVL-30 to raise and descend smoothly and quietly. Compact design for easy storage and doorway passage. Outriggers swing easily into place to provide excellent stability. For additional safety, outriggers include interlocks, which prevent the platform from being raised unless all four outriggers are in firm contact with the ground. The BMVL-30 also includes a tilt and roll design to allow the lift to be easily transported from one job site to another.



MOBILE VERTICAL LIFT • MANUALLY PROPELLED LIFT

MODEL NUMBER	WORKING HEIGHT	PLATFORM MAX	PLATFORM MIN	PLATFORM W" x L"	W" x L"	HEIGHT STOWED	WEIGHT
BMVL-30	35'	30'	10"	24" x 27"	29" x 56"	78"	1040

ADDITIONAL INFORMATION

- Outriggers included & attached
- Outrigger footprint= 64"x74"

DRIVABLE VERTICAL MAST LIFT (DVML-18)

Introducing a Drivable Version of the Ballymore Push-able Vertical Lift

- 330 LBS. CAPACITY
- 42" handrails for additional safety
- Easy operating controls
- Numerous Safety features including a Manual Lowering Valve, Emergency Stop Button, Automatic Pothole Protection
- Key Entry for controlled usage
- 2-12V Batteries that charge using a 110 volt outlet
- Fork Pockets for transportation
- Durable Orange Powder Coat
- ANSI 92.20

POWDER COATED TOUGH™

IN STOCK



Model Number	Working Height	Platform Height	W" X L"	Platform W x L (Outer Dimension)	Platform Extension	Weight
DVML-18	24'	18'	30" X 62"	24" X 25"	21"	2430



Ballylift Model # BL-315



Cantilevered platform extends 34" beyond base frame



Rolls thru standard doorway

FEATURES:

- Totally enclosed platform with 42" guardrails, midrails, and gate; 4" toeboards and skid resistant mat
- Two platform styles available:
 - Standard platform with steel deck (BL-315)
 - Cantilevered platform w/aluminum deck (BL-C14)
- Built-in ladder with flat, skid resistant treads and grab rails provides access to platform in fully lowered position while anti-skid rungs provide access to platform when platform is raised
- Compact base frame rolls on two swivel and two rigid 6" casters
- Rails fold down for doorway passage and easy storage
- Base is 32" wide by 65" long, outriggers extend to 68" wide
- Leveling jacks secure lift to the floor
- Hydraulic hand pump provides easy lifting
- Standard finish is deep gray
- Meets/exceeds ANSI safety standards

BALLYLIFT ADJUSTABLE HEIGHT WORK PLATFORM

- **300 LB. CAPACITY**
- **Manually propelled maintenance lift providing working heights to 21' high**
- **Easy to use hydraulic hand pump**



BALLYLIFT • MANUALLY PROPELLED ONE WORKER LIFTS

	MODEL NUMBER	PLATFORM MAX	PLATFORM MIN	PLATFORM LENGTH	PLATFORM WIDTH	WEIGHT LBS.	WORKING HEIGHT
Standard	BL-315	15'	6' 4"	20"	28"	590	21'
Cantilevered	BL-C14	14'	6' 4"	64"	20"	900	20'

OPTIONAL ACCESSORIES

- Tool Tray
- Fluorescent tube holder
- Platform duplex receptacle

MR TELESCOPING HYDRAULIC MAINTENANCE LIFTS


Model Number	Working Height	Platform Height		Weight Lbs.
		Max	Min	
MR-15-AC	21'	15'	6'4"	800
MR-15-DC	21'	15'	6'4"	930
MR-20-AC	25'	19'3"	6'4"	1,000
MR-20-DC	25'	19'3"	6'4"	1,130
MR-24-AC	30'	23'8"	6'7"	1,200
MR-24-DC	30'	23'8"	6'7"	1,330
MR-28-AC	34'	28'	6'10"	1,420
MR-28-DC	34'	28'	6'10"	1,550

FEATURES:

- Select from maximum platform heights of 15', 19', 24' or 28'
- Roomy 28" x 36" platform
- Accommodates two workers
- Totally enclosed platform with 42" guard rails, midrails & gate 4" toeboards and non-slip dec.
- Built-in ladder with flat, skid resistant treads and grab rails provides access to platform in fully lowered position
- Rails fold for doorway passage and easy storage
- Non-marking 8" casters for easy rolling and maneuverability
- Self-storing outriggers extend from base for maximum stability
- Leveling jacks secure unit to floor and compensate for uneven surfaces



Rolls thru standard doorway

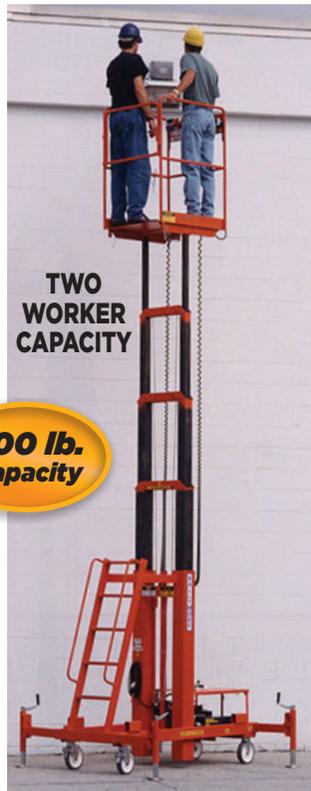

TWO WORKER CAPACITY

500 lb. Capacity

Shown with optional orange finish

MR LIFTS TELESCOPING HYDRAULIC MAINTENANCE LIFTS

- **500 LB. COMBINED TWO PERSON CAPACITY**
- **Working heights to 34'**
- **Three power options:**
 - Convenient plug in 120V AC
 - Independent 12V DC deep cycle system with battery and charger
 - Air hydraulic power requiring 90 CFM with 90 PSI pressure
- Deep gray finish
- Meets ANSI safety standards

OPTIONAL ACCESSORIES

- Air-Hydraulic power
- Tool Tray
- Fluorescent tube holder
- Platform duplex receptacle



PORTABLE LOADING DOCK

- **CAPACITY 1,500 LBS.**
- Platform Height- Ground Level to 55" high
- Platform Dimensions - 47" X 75"
- Weight - 2,178 lbs.
- Color - Safety Orange and Yellow
- Overall Base - 68" wide by 105" long
- Overall Height (fully lowered) - 44"
- Overall Height (fully raised) - 98"
- Pendant Controls for Raising and Lowering
- Two 12V Batteries
- 24V Drive Motor



MODEL #PLD-PLUS



FEATURES AND BENEFITS

- Powered in forward, reverse, raise and lower directions
- All in one Control Handle for steering, movement forward and reverse, and platform raising and lowering
- Heavy Duty Capacity - 1,500 lbs.
- Large Platform designed to address a wide variety of products
- Key Control Operation
- Fold Down Rails
- Safety Features including Emergency Stop Button
- Convenient 110 volt charging
- Extendable Side Rails
- Battery Power Indicator
- Built in Cycle Counter



Easily load or unload heavy objects to dock levels or pickup truck bed heights!

**IN STOCK for
Immediate
Availability**

**9 Sizes to
Choose
From**

**3 Lithium
Powered
Products**

LITHIUM
BATTERY POWERED

PALLET PRODUCTS





BALLYPAL22AG63 STACKER

- Capacity= 2200 lbs.
- Lift Height Max. = 63"
- Lift Height Min. = 2 1/8"
- Fork Length= 42"
- Fork Width= 4"
- Base Legs (OD)= 46" to 58"
- Overall Length= 66 1/2"
- Overall Width= 46" to 58"
- Overall Height= 80"
- Single Mast
- Weight= 830 lbs.
- 1 Battery = 12V/150Ah



BALLYPAL22AG138 STACKER

- Capacity= 2200 lbs.
- Lift Height Max. = 138"
- Lift Height Min. = 2 1/8"
- Fork Length= 42"
- Fork Width= 4"
- Base Legs (OD)= 46" to 58"
- Overall Length= 66 1/2"
- Overall Width= 46" to 58"
- Overall Height= 89 1/2"
- Duplex Mast
- Weight= 1120 lbs.
- 1 Battery = 12V/150Ah



Semi Electric Stacker with Adjustable Base Legs. Single Mast with a Lift Height of 63"

FEATURES

- Forks adjust from side to side to accommodate skid widths
- Adjustable forks lower to the minimum height 2 1/8"
- Overall fork width 8 1/4" to 28 1/2" (Adjustable)
- Straddle legs adjust to three positions
- Sturdy mast made of rolled U- shapes
- Powerful lift motor 2.1 HP
- Battery gauge and On/Off switch
- Integrated 150 Ah maintenance free battery provides more than enough power to handle heavy duty lifting
- Integrated charger facilitates easy and reliable charging



POWDER COATED TOUGH™

Semi Electric Stacker with Adjustable Base Legs. Duplex Mast with a Lift Height of 138"

FEATURES

- Forks adjust from side to side to accommodate skid widths
- Adjustable forks lower to the minimum height 2 1/8"
- Overall fork width 8 1/4" to 28 1/4" (Adjustable)
- Straddle legs adjust to three positions
- Sturdy mast made of rolled U- shapes
- Powerful lift motor 2.1 HP
- Battery gauge and On/Off switch
- Integrated 150 Ah maintenance free battery provides more than enough power to handle heavy duty lifting
- Integrated charger facilitates easy and reliable charging



POWDER COATED TOUGH™

MODEL NUMBER	WEIGHT CAPACITY	LIFT HEIGHT MAX	LIFT HEIGHT MIN	FORK LENGTH	FORK WIDTH	BASE LEGS (OD)	OVERALL LENGTH	OVERALL WIDTH	OVERALL HEIGHT	WEIGHT	POWER - BATTERIES
BALLYPAL22AG63	2200	63"	2 1/8"	42"	4"	46" TO 58"	66 1/2"	46" TO 58"	80"	830	1 X 12V
BALLYPAL22AG138	2200	138"	2 1/8"	42"	4"	46" TO 58"	66 1/2"	46" TO 58"	89 1/2"	1120	1 X 12V

Fully Electric Mono Mast & Dual Mast Entry Level Stackers



FEATURES

- Mono mast for maximum visibility
- Built-in charger
- Battery discharge indicator with lift lock out for improved battery life
- 3 points design with centered drive for maximum stability and traction
- Two Powerful 12Volt batteries

FEATURES

- Duplex mast
- Built-in charger
- Battery discharge indicator with lift lock out for improved battery life
- Adjustable straddle leg design for diverse pallet designs and improved stability
- 3 points design with centered drive for maximum stability and traction
- Two powerful 12Volt 85Ah batteries



BALLYPAL22MSL63 ADJUSTABLE MONO MAST STACKER

- **Capacity= 2200 lbs.**
- **Overall Fork Width 18" to 39 1/2" (Adjustable)**
- **Travel Speed = 2.3/2.5 mph**
- **Max Gradeability= 5% Laden and 10% Unladen**
- **Battery Voltage 2 x12V /85Ah**

BALLYPAL22LSL138 ADJUSTABLE DUPLEX MAST STACKER


- **Capacity= 2200 lbs.**
- **Overall Fork Width 18" to 39 1/2" (Adjustable)**
- **Travel Speed = 2.3/2.5 mph**
- **Max Gradeability= 5% Laden and 10% Unladen**
- **Battery Voltage 2 x12V /85Ah**

MODEL NUMBER	WEIGHT CAPACITY	LIFT HEIGHT MAX	FORK LENGTH	FORK WIDTH	LOWERED MAST HEIGHT	FREE LIFT HEIGHT	EXTENDED MAST HEIGHT	HEIGHT OF TILLER IN DRIVE	HEIGHT LOWERED	OVERALL LENGTH	OVERALL WIDTH	WEIGHT	POWER - BATTERIES
BALLYPAL22MSL63	2200	63"	45"	4"	77"	60"	97"	49" MAX	1.6"	71"	29"	1350	2 X 12V
BALLYPAL22LSL138	2200	138"	45"	4"	88"	135"	158"	49" MAX	1.6"	71"	29"	1655	2 X 12V
BALLYPAL35TSL157	3500	157"	45"	4.7"	75"	52"	176"	56" MAX	2"	82"	46" TO 58"	3263	24V

Fully Electric Straddle Leg Walkie Electric Stacker

FEATURES

- Proportional lifting allows for efficient and safe lifting of any product at any lift speed.
- State of the art components
- Mesh protection for safety as well as great visibility during operation
- Robust chassis and thick apron protect the truck and its components
- Three stage mast

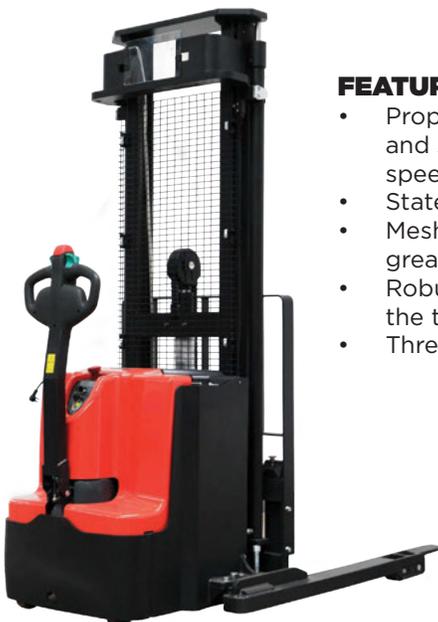

Straddle Leg
Adjustable straddle leg design, suitable for diverse pallet sizes and more stability

BALLYPAL35TSL157 ADJUSTABLE STACKERS

- **Capacity= 3500 lbs.**
- **Overall Fork Width 19 1/2" to 38" (Adjustable)**
- **Travel Speed = 3.5/3.7 mph**
- **Max Gradeability= 6% Laden and 12% Unladen**
- **Battery Voltage 24V /2705Ah**





BALLYPAL33N-21 PALLET TRUCK

- Capacity= 3300 lbs.
- Travel Speed = 2.85 Laden/2.98 Unladen mph
- Max Gradeability=5% Laden and 16% Unladen
- Battery Voltage 24V /20Ah Lithium

NEW

BALLYPAL33N-27 PALLET TRUCK

- Capacity= 3300 lbs.
- Travel Speed = 2.85 Laden/2.98 Unladen mph
- Max Gradeability=5% Laden and 16% Unladen
- Battery Voltage 24V /20Ah Lithium

BALLYPAL45N-27 PALLET TRUCK

- Capacity= 3300 lbs.
- Travel Speed = 2.85 Laden/2.98 Unladen mph
- Max Gradeability=5% Laden and 16% Unladen
- Battery Voltage 24V /20Ah Lithium

NEW

Newest Technology Lithium Battery Powered Pallet Trucks - Electric Drive and Electric Lifting and Lowering



LITHIUM
BATTERY POWERED

Can be operated with the tiller in the **vertical position**, allowing the operator to work in trailers and narrow aisles.

FEATURES

- Integrated pin control for authorized usage
- Emergency reverse and horn buttons
- Turtle Speed button
- Battery discharge indicator
- Operating hour counter
- On-board diagnostics and error codes
- Can be operated with tiller in the vertical position for work in confined areas
- Maintenance free lithium battery
- Quick charging and long-lasting battery can be charged in the truck



LITHIUM
BATTERY POWERED

Can be operated with the tiller in the **vertical position**, allowing the operator to work in trailers and narrow aisles.

FEATURES

- Integrated pin control for authorized usage
- Emergency reverse and horn buttons
- Turtle Speed button
- Battery discharge indicator
- Operating hour counter
- On-board diagnostics and error codes
- Can be operated with tiller in the vertical position for work in confined areas
- Maintenance free lithium battery
- Quick charging and long-lasting battery can be charged in the truck



LITHIUM
BATTERY POWERED

Can be operated with the tiller in the **vertical position**, allowing the operator to work in trailers and narrow aisles.

FEATURES

- Integrated pin control for authorized usage
- Emergency reverse and horn buttons
- Turtle Speed button
- Battery discharge indicator
- Operating hour counter
- On-board diagnostics and error codes
- Can be operated with tiller in the vertical position for work in confined areas
- Maintenance free lithium battery
- Quick charging and long-lasting battery can be charged in the truck

MODEL NUMBER	WEIGHT CAPACITY	LIFT HEIGHT	HEIGHT OF TILLER IN THE DRIVE POSITION	HEIGHT LOWERED	FORK LENGTH	FORK WIDTH	OVERALL LENGTH	OVERALL WIDTH	WEIGHT	POWER - BATTERIES
BALLYPAL33N-21	3300	4.5"	46" MAX	3"	45"	6.3"	60"	21"	271	24V
BALLYPAL33N-27	3300	4.5"	46" MAX	3"	45"	6.3"	60"	27"	278	24V
BALLYPAL45N-27	4500	4.5"	46" MAX	3"	45"	6.3"	60.5"	27"	337	48V

Heavy Duty Long Tiller Electric Pallet Truck



FEATURES

- Long tiller design
- High performance maintenance free AC Drive Unit
- Equipped with AC Drive Unit
- Higher ground clearance
- Built in charger
- Special design fork tips with 3 entry rollers and 4 exit rollers
- Creep Button
- Large capacity battery 160Ah


POWDER COATED TOUGH™



BALLYPAL40L PALLET TRUCK

- Capacity= 4000 lbs.
- Travel Speed = 3.1/3.3 mph
- Max Gradeability = 8% Laden and 12% Unladen
- Battery Voltage 24V /160Ah

MODEL NUMBER	WEIGHT CAPACITY	LIFT HEIGHT	HEIGHT OF TILLER IN THE DRIVE POSITION	HEIGHT LOWERED	FORK LENGTH	FORK WIDTH	OVERALL LENGTH	OVERALL WIDTH	WEIGHT	POWER - BATTERIES
BALLYPAL40L	4000	4.7"	48" MAX	3"	48"	6.3"	68"	29"	913	24V

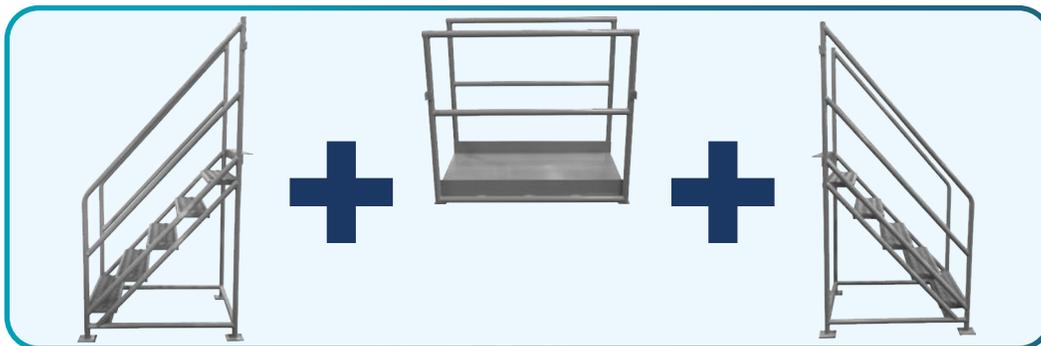

HEAVY DUTY INDUSTRIAL CROSSOVERS



- Three Piece Construction: two stair sections & one bridge
- Heavy 1 1/4" schedule 40 pipe structural frame & rails
- Standard tread: expanded metal or serrated grating (Optional solid steel tread with abrasive mat on bridge available to avoid debris falling onto conveyors)
- Full rails, midrails and toeboards
- Stairway slope allows easier climbing and descent
- Gray powder coat finish
- Each stair section has four legs with large, pre-drilled plates to bolt to the floor
- Available in alternate configurations: U-Shape, Z-Shape, L-Shape, etc. (see below)

STAIR SECTIONS (Set of 2) FOR INDUSTRIAL CROSSOVERS

2 to 7 Steps... with choice of widths

# of Steps each Section	Vertical Clearance Inches	27" Overall Width (Expanded Metal)		31 1/2" Overall Width (Serrated Grating)		38 1/2" Overall Width (Serrated Grating)	
		MODEL #	WEIGHT	MODEL #	WEIGHT	MODEL #	WEIGHT
2	28	CS227	253	CS231	254	CS238	276
3	38	CS327	310	CS331	325	CS338	351
4	48	CS427	378	CS431	393	CS438	428
5	58	CS527	445	CS531	465	CS538	505
6	68	CS627	517	CS631	537	CS638	583
7	78	CS727	600	CS731	630	CS738	680

Extra Heavy Duty 800 lb. Capacity

BRIDGE SECTIONS FOR INDUSTRIAL CROSSOVERS


Combine any length with appropriate width stair sections

Length in Inches	Horizontal Clearance Inches	27" Overall Width (Expanded Metal)		31 1/2" Overall Width (Serrated Grating)		38 1/2" Overall Width (Serrated Grating)	
		MODEL #	WEIGHT	MODEL #	WEIGHT	MODEL #	WEIGHT
20	18	-CB227	88	-CB231	95	-CB238	102
30	28	-CB327	111	-CB331	120	-CB338	128
40	38	-CB427	133	-CB431	140	-CB438	153
50	48	-CB527	156	-CB531	165	-CB538	180
60	58	-CB627	195	-CB631	203	-CB638	220

POWDER COATED TOUGH™



Example Shown: Model CS527-CB627 (27" Overall Width)

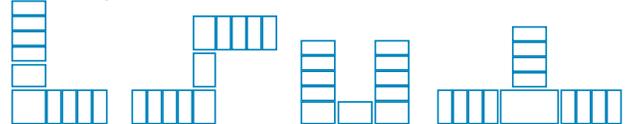

Alternate configurations available. Call for details.

NOTE: For complete model designation use model # prefix for pair of stair sections from "Stair Sections" table, plus model # suffix from "Bridge Sections" table. (i.e., CS327-CB227).

THIN LINE LADDER

- **300 LB. CAPACITY**
- Made out of strong and durable, heavy duty 1" square tubing
- Manufactured to ANSI 14.7 and OSHA standards
- No assembly required
- Less than 4" thick when folded
- Ships via UPS in a box to eliminate freight damage
- Rolls easily in the open or closed position
- 50° slope for easy climbing
- Standard finish is powder coat blue



The Tilt and Roll feature allows the ladder to roll easily in either the folded or climbing position. Hang it when not in use. The ladder is only 3" thick when folded and fits under most shelving and racking. The 50 degree slope with 7" intermediate steps and 10" deep top step provides a comfortable safe climb. The "Thin Line" series ships flat in a corrugated box to reduce freight expenses and eliminates freight damage. Ships ready for use, no assembly required.



MODEL NUMBER	STEPS	TOP STEP HEIGHT	FOLDED DIMENSIONS	OPEN W" X L"	WEIGHT LBS.
TL218	2	20"	3 X 21 X 41	21 X 26	22
TL318	3	30"	3 X 21 X 52	21 X 32	31
TL418	4	40"	3 X 21 X 64	21 X 38	42

MERCHANDISE LADDER CART

- **1000 LB. CAPACITY**
- Base Dimensions= 21"x 51"
- * Overall Height= 63"
- Steps= 3 with Abrasive Mat
- Top Shelf Height= 28"
- Top Shelf Dimensions= 20" Wide by 40" Long
- Bottom Shelf Dimensions= 20" Wide by 45" Long
- Casters= 4 - 2 swivels and 2 rigid
- Weight = 108 lbs.



MODEL #BMLC

Ballymore introduces the heavy duty merchandise ladder cart with a capacity of 1,000 lbs. The cart has two large shelves for transporting a variety of merchandise. Ladder portion has a spring loaded device which secures the ladder to the floor when climbing and retracts for easy maneuvering. Cart is equipped with 4 casters- 2 swivels and 2 rigid for effortless turning and moving. Durable powder coated gray with yellow steps.



PAINT CARTS

Features:

- **400 LB. CAPACITY**
- Base = 20" Wide X 27" Long
- Shelf - 20" Wide X 20" Long
- Overall Height 42"
- Four Heavy Duty Casters (2 swivel, 2 rigid)
- Weight = 62 lbs.
- Ships Assembled
- Colors Available In Orange or Blue



It's here! Ballymore's latest product - a perfectly designed patent pending Heavy Duty Paint Cart. The new paint cart makes transporting a 5 gallon container quicker and less stressful on the back and shoulders.



MODEL #BPCRT-O



MODEL #BPCRT-B

Need a custom ladder, lift or platform? We will engineer & fabricate to meet your requirements.

Need a custom vertical access solution? Let us work with you step-by-step on your custom application. We'll engineer and fabricate a custom ladder, lift or platform to meet your specific requirements in a quick and timely manner. Make your custom application a reality! Call Ballymore today: **800-762-8327**



CUSTOM ENGINEERED WORK PLATFORMS

CUSTOM VERTICAL ACCESS SOLUTIONS

Ballymore's custom design & fabrication capabilities can meet requirements for projects of all sizes and all types.

CUSTOM LIFTS, PLATFORMS & LADDERS



Product Specifications are subject to change without notice. Please confirm critical product specifications at the time of ordering.

Ship Prepaid and Add to take advantage of freight cost reductions with our carrier.

Ladder Inspection Procedure

Shipments are made FOB factory. Each product has been inspected before shipment. Consignee is responsible to inspect material at time of delivery, and should refuse shipment or make written notice to carrier upon receipt of damaged materials.

Carriers and Ballymore will not accept claims if damage is not noted at the time of delivery.

Freight: Ballymore can provide estimated freight cost based on our preferred carriers. Note: Costs are subject to change depending on fuel surcharges, special delivery requirements, etc. Ballymore will not be responsible for differences in freight estimates and actual freight costs.

On collect or 3rd party billing shipments, any freight claims must be handled by the customer, including refused shipments.

WARRANTY (All products including lifts)

Company warrants these products to be free from defects in material and workmanship for a period of one year from date of original purchase. Component parts carry individual warranties as provided by the manufacturer. Our warranty does not extend to parts or end products subjected to misuse, neglect, damage in shipment, by accident or failure to comply with operating instructions. We will repair or replace any unit which is defective during the warranty period if that unit is returned to our factory properly packaged with transportation charges paid. Claims for unauthorized field labor or time charges will not be accepted. Company will not be responsible for any consequential damages of any nature.

RETURN POLICY: Written factory permission must be received prior to return. Returns must be in good condition and made within 30 days of original shipment. Freight prepaid. Restocking charge of 20 - 25% on standard items, 50% on aluminum and stainless.

NON-REFUNDABLE ITEMS:

Custom or modified ladders, work platforms, crossovers, modified or custom lifts are non-refundable.

Minimum Order: \$15.00, Prepay and add shipments are subject to a service charge.

POLICIES WARRANTY SHIPPING & RETURNS INFORMATION

STEP UP TO BALLYMORE

PALLET TRUCKS AND STACKERS

Nine sizes available of stackers and trucks, including Lithium Powered models

PORTABLE LOADING DOCK

The Portable Loading Dock is ideal for loading or unloading heavy objects to dock levels or pickup truck bed heights.



ELEVATION THROUGH INNOVATION

PATENTED BOXED LADDER SYSTEM

Innovative, patented bolt-in top step design is engineered to allow ladders to ship boxed, reducing freight costs, minimizing risk of freight damage and increasing stocking efficiency.

PATENTED WEIGHT ACTUATED LOCKSTEP

The safest, most durable Lockstep on the market today. Patented design securely locks the ladder to the floor when just 70 lbs. is applied to any of the steps, providing increased safety.



MORE PRODUCTS = MORE SOLUTIONS

- **MORE** Component Ladder options to extend the life and utility of your ladders
- **MORE** Custom Engineered Ladder, Lift & Work Platform Innovations
- **MORE** Safety Designed Products and Options
- **MORE** Patented Vertical Access Solutions



BALLYMORE

ROLLING SAFETY LADDERS • PERSONNEL LIFTS • WORK PLATFORMS • CARTS

