

# THE ULTIMATE DOCK TO GROUND RAMP



## THE #1 CHOICE OF DOCK CREWS

- ✓ Easily Repositioned
- ✓ Installs Quickly
- ✓ Unique Applications




Dock-to-Ground ramps are ideal for use in material handling situations where freight needs to travel from the grade level to dock height. Ramp widths can range from 60-inches to 12-foot wide. Capacities can range from 12,000 lbs. to 80,000 lbs. The ramps are designed to be installed quickly and can accommodate just about any unique loading application. Unlike concrete ramps, our dock-to ground ramps can be relocated when needed.



### 15" Lip

- ✓ Designed with a 15-inch lip that rests securely on the dock
- ✓ Allows ramp to flex as loads move up and down the ramp

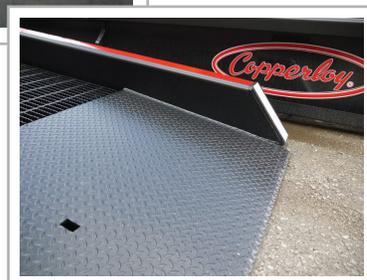

### Low End Plate

- ✓ 36" long
- ✓ Approach plate beveled from underside provides smooth ground-level entry
- ✓ Eliminates jolts and bumps when forklifts travel on and off ramp



by JH INDUSTRIES, INC.


# MORE FEATURES



by JH INDUSTRIES, INC.

## THE #1 CHOICE OF DOCK CREWS

- ✓ Easily Repositioned
- ✓ Installs Quickly
- ✓ Unique Applications

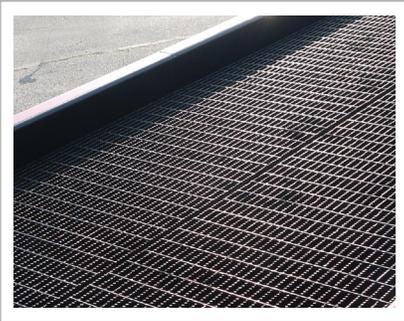

### Deck Grating and Curb

- ✓ Grating is constructed of electro-forged serrated steel
- ✓ Superior strength and traction
- ✓ Seven inch curb height prevents accidental vehicle runoff



### Chains and Brackets

- ✓ Chains and brackets provided on every dock-to-ground ramp
- ✓ Once brackets and chains are securely fastened ramp is ready for use



### Ramp To Platform (Optional)

- ✓ Can be attached to any size platform
- ✓ Creates an instant loading dock facility



### Handrails (Optional)

- ✓ Can be added to any ramp at any length
- ✓ 42-inch high split handrails constructed in all steel
- ✓ Reflective tape is added for additional safety



### Custom Ramp (Optional)

- ✓ Custom ramps can be designed for special applications
- ✓ Special applications may include low clearance vehicles, wide vehicles or dock aprons

