


# TPI Industrial Assembled Maximum Duty Circulators


## Features

- Easy access hinged guard
- 18" drop down, 2-Speed switch
- Cord options are shown below
- Steel hub/spider aluminum paddle blades
- Powder coated steel guards
- Meets OSHA standards
- 5 year limited warranty

DIMENSIONS	
24"	27" Diameter x 14.5" Depth
30"	33.5" Diameter x 14.5" Depth



Closed (Front)



Open (Front)

## Motor Specifications

- 2-Speed
- 1-Phase, 120V
- Permanent split capacitor
- Frame size: 48
- 1/2 HP
- Ball bearing
- Totally enclosed, permanently lubricated
- 1/2" Shaft



## Pedestal Specifications


- Pedestal pole adjusts the center of the fan from 52 to 78 inches.
- Pedestal steel dome base is 27" in diameter and has 5 carriage bolts.

## Factory Assembled and Tested Fan Heads, Mounts, and Wheel Kits



HDM-C  
CEILING MOUNT

Note: 1/2" pipe piece required for assembly



HDM-I  
I-BEAM MOUNT

Note: 1/2" pipe piece required for assembly



HDM-W  
WALL MOUNT



OPTIONAL  
WHEEL KIT

## Standard Models

ASSEMBLED FAN HEAD		COLOR	BLADE SIZE	HP	CFM / RPM		AMPS	SHIPPING WT. (LBS)	HEAD LIST
UPC#	MODEL				HIGH	LOW			
686334									
874441	HDH 24-JR	Yellow	24"	1/2	8600 / 1100	6500 / 800	3.5	44	629
874465	HDH 30-JR	Yellow	30"		9850 / 1100	7500 / 800	4	48	646
874502	HDH 24-GJR	Gray	24"		8600 / 1100	6500 / 800	3.5	44	629
874519	HDH 30-GJR	Gray	30"		9850 / 1100	7500 / 800	4	48	646

## Accessories


UPC#	MODEL	COLOR	DESCRIPTION	SHIPPING WT. (LBS)	LIST
686334					
796095	HDM-P	Yellow	Heavy Duty Pedestal Mount	34 lbs.	192
796101	HDM-W	Yellow	Heavy Duty Wall Mount	3 lbs.	75
796118	HDM-I	Yellow	Heavy Duty I-Beam Mount	9 lbs.	144
796125	HDM-C	Yellow	Heavy Duty Ceiling Mount	3 lbs.	83
796187	ACM-P	Gray	Pedestal Mount	34 lbs.	180
796194	ACM-W	Gray	Wall Mount	3 lbs.	69
796200	ACM-I	Gray	I-Beam Mount	9 lbs.	136
796217	ACM-C	Gray	Ceiling Mount	3 lbs.	75
796224	ACM-S	Gray	Suspension Mount	2 lbs.	62
874724	RS 06-EC	Yellow	6' Extension Cord used with drop down Power Switch	1 lbs.	21
874731	RS 09-EC	Yellow	9' Extension Cord used with drop down Power Switch	1.5 lbs.	23
874748	RS 12-EC	Yellow	12' Extension Cord used with drop down Power Switch	2 lbs.	25
874755	SCK-12	---	12' Safety Cable with Clamps	.5 lbs.	23
874762	R1-MOT	Yellow	1/2 HP Motor with Remote Switch	1 lbs.	180
868181	ACM-PM	Standard Black	Pole Mount	5 lbs	88
868136	ACM-WK	Standard Black	Optional Wheel Kit	4 lbs.	80

# TPI Industrial Unassembled Maximum Duty Circulators

## Features

- Easy access hinged guard
- 18" drop down, 2-Speed switch
- Cord options are shown below
- Steel hub/spider aluminum paddle blades
- Coated steel guards
- Meets OSHA standards

DIMENSIONS	
24"	27" Diameter x 14.5" Depth
30"	33.5" Diameter x 14.5" Depth

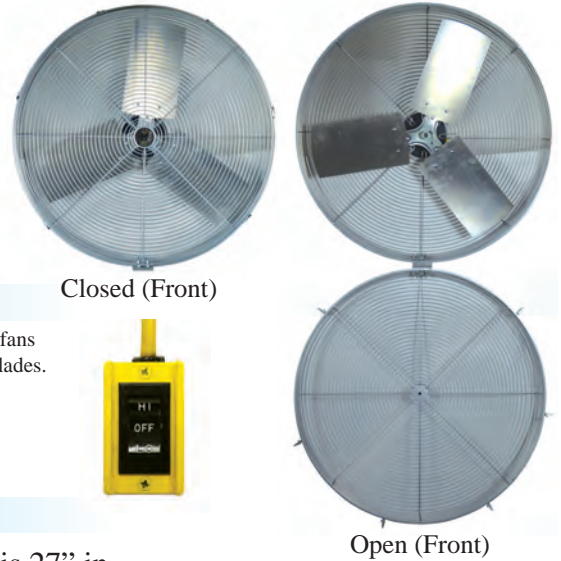

## Motor Specifications

- 2-Speed
  - 1-Phase, 120V
  - Ball bearing
  - Frame size: 48
  - Totally enclosed
  - Permanent split capacitor
  - Permanently lubricated
  - 1/2" Shaft
- Note: 1/3 and 1/4 HP fans come with 3 paddle blades.

## Product Specifications

- Pedestal pole adjusts the center of the fan from 52 to 78 inches.
- Pedestal steel dome base is 27" in diameter and has 5 carriage bolts.

## TPI Industrial Mounts



**Note: Motor, blades, guard, and mount are packed and shipped in a single UPS-able carton.**

## Standard Models

FAN TYPE		HIGH PERFORMANCE				MAX AMPS	STANDARD INDUSTRIAL			MAX AMPS
MOTOR	HP	1/3				2.8	1/4			2.5
	SPEEDS	2					2			
CFM / RPM	24"	7000 / 5200		1100 / 800		3.0	6800 / 5000		1100 / 800	2.7
	30"	8200 / 6200		1100 / 800			7900 / 6000		1100 / 800	
COLOR		GRAY				GRAY				
POLE ADJUSTMENT		52" to 78"				52" to 78"				
WARRANTY		3 YEARS				1 YEAR				
SIZE	TYPE of MOUNT	UPC#	MODEL	WT. (lbs.)	LIST	UPC#	MODEL	WT. (lbs.)	LIST	
24"	Pedestal Mount	874526	UHP 24-PJR	75	683	874625	ACU 24-PJR	75	537	
	Wall Mount	874540	UHP 24-WJR	45	577	874649	ACU 24-WJR	45	466	
	I-Beam Mount	874564	UHP 24-IJR	50	640	874663	ACU 24-IJR	50	528	
	Ceiling Mount	874588	UHP 24-CJR	45	584	874687	ACU 24-CJR	45	473	
	Suspension Mount	874601	UHP 24-SJR	43	572	874700	ACU 24-SJR	43	459	
30"	Pedestal Mount	874533	UHP 30-PJR	78	700	874632	ACU 30-PJR	78	548	
	Wall Mount	874557	UHP 30-WJR	48	596	874656	ACU 30-WJR	48	478	
	I-Beam Mount	874571	UHP 30-IJR	53	657	874670	ACU 30-IJR	53	541	
	Ceiling Mount	874595	UHP 30-CJR	48	602	874694	ACU 30-CJR	48	485	
	Suspension Mount	874618	UHP 30-SJR	46	589	874717	ACU 30-SJR	46	473	

## Accessories

UPC#	MODEL	COLOR	DESCRIPTION	SHIPPING WT. (LBS)	LIST
686334					
874724	RS 06-EC	Yellow	6' Extension Cord used with drop down Power Switch	1 lbs.	21
874731	RS 09-EC	Yellow	9' Extension Cord used with drop down Power Switch	1.5 lbs.	23
874748	RS 12-EC	Yellow	12' Extension Cord used with drop down Power Switch	2 lbs.	25
874755	SCK-12	----	12' Safety Cable with Clamps	.5 lbs.	23
874779	R2-MOT	Yellow	1/3 HP Motor with drop down Remote Switch	1 lbs.	175
874786	R3-MOT	Yellow	1/4 HP Motor with drop down Remote Switch	1 lbs.	170

# TPI Industrial Heavy Duty Yellow Air Circulator

## Features

- Pull chain switch
- Cord-SJT type 3 conductor, 12' long
- Steel hub/spider aluminum paddle blades
- Powder coated steel guards
- Meets OSHA standards
- 5 year limited warranty

DIMENSIONS	
24"	27" Diameter x 14.5" Depth
30"	33.5" Diameter x 14.5" Depth

## Motor Specifications

- 2-Speed
- 1 Phase, 120V
- Permanent split capacitor
- Frame size: 48
- 1/2 HP
- Ball bearing
- Totally enclosed, permanently lubricated
- 1/2" Shaft

## Pedestal Specifications

- Pedestal pole adjusts the center of the fan from 52 to 78 inches.
- Pedestal steel dome base is 27" in. diameter and has 5 carriage bolts.



HDH-30 FAN HEAD WITH HDM-P PEDESTAL MOUNT




## Factory Assembled and Tested Fan Heads, Mounts, and Wheel Kits



HDM-C CEILING MOUNT

Note: 1/2" pipe piece required for assembly



HDM-I I-BEAM MOUNT

Note: 1/2" pipe piece required for assembly



HDM-W WALL MOUNT



OPTIONAL WHEEL KIT

## Standard Models

SIZE	CFM / RPM		AMPS HIGH	FAN TYPE	FAN HEAD		MOUNT		SHIPPING WT. (LBS)	HEAD LIST	MOUNT LIST
	HIGH	LOW			UPC# 686334	MODEL	UPC# 686334	MODEL			
24"	8600 / 1100	6500 / 800	3.5	Fan Head	796071	HDH 24	----	----	44	576	----
				Pedestal Fan		HDH 24	796095	HDM-P	78	576	192
				Wall Mount Fan		HDH 24	796101	HDM-W	47	576	75
				I-Beam Mount Fan		HDH 24	796118	HDM-I	53	576	144
				Ceiling Mount Fan		HDH 24	796125	HDM-C	47	576	83
30"	9850 / 1100	7500 / 800	4	Fan Head	796088	HDH 30	----	----	48	588	----
				Pedestal Fan		HDH 30	796095	HDM-P	82	588	192
				Wall Mount Fan		HDH 30	796101	HDM-W	51	588	75
				I-Beam Mount Fan		HDH 30	796118	HDM-I	57	588	144
				Ceiling Mount Fan		HDH 30	796125	HDM-C	51	588	83
Optional Wheel Kit						868136	ACM-WK	4	----	----	

# TPI Industrial Assembled Circulator Heads and Mounts

## Features

- Pull chain switch
- SJT type 3 conductor, 12' long cord
- Steel hub/spider aluminum paddle blades
- Coated steel guards
- Meets OSHA standards

DIMENSIONS	
24"	27" Diameter x 14.5" Depth
30"	33.5" Diameter x 14.5" Depth



HDH 30-G



## Motor Specifications

- 2-Speed
- 1 Phase, 120V
- Ball bearing
- Frame size: 48
- Totally enclosed
- Permanent split capacitor
- Permanently lubricated
- 1/2" Shaft

## Product Specifications

- Oscillating model oscillates in a 90° arc or can be locked in a fixed position
- Metal gears in the oscillating mechanism allow the fan to operate at a maximum 30° downward tilt

## Standard Models

H.P.	BLADE SIZE	MODEL	UPC# 686334	FAN HEAD TYPE	CFM	RPM	AMPS	WT. (LBS)	LIST
<b>Industrial 1/4</b>	24"	ACH 24	796769	STATIONARY	6800/5000	1100/800	2.5	40	329
	30"	ACH 30	796170		7900/6000	1100/800	2.7	44	341
1 Year Warranty									
<b>High Performance 1/3</b>	24"	IHP 24-H	798983	STATIONARY	7000/5200	1100/800	2.8	40	421
	30"	IHP 30-H	798990		8200/6200	1100/800	3	44	440
3 Year Warranty									
<b>Heavy Duty 1/2</b>	24"	HDH 24-G	853927	STATIONARY	8600/7100	1100/800	3.5	44	551
	30"	HDH 30-G	852869		9850/8100	1100/800	4	48	570
5 Year Warranty									
<b>Industrial Oscillating 1/4</b>	24"	ACH 24-O	796961	OSCILLATING	6800/5000	1100/800	2.5	44	508
	30"	ACH 30-O	796378		7900/6000	1100/800	2.7	48	526
1 Year Warranty									

TPI offers six factory assembled and tested fan mounts that can be used with any of the non-oscillating TPI Industrial heads.

## Industrial Mounts

MOUNT	MODEL	UPC# 686334	SHIPPING WT. (LBS)	LIST
Pedestal (1/2HP Models)	GACM-P	875387	34	192
Pedestal (1/3 & 1/4HP Models)	ACM-P	796187	34	180
Wall Mount	ACM-W	796194	3	69
I-Beam Mount	ACM-I	796200	9	136
Ceiling Mount	ACM-C	796217	3	75
Suspension Mount	ACM-S	796224	2	62
Pole Mount	ACM-PM	868181	5	88
Optional Wheel Kit	ACM-WK	868136	4	80



# TPI Industrial Unassembled Circulators

## Features

- Pull chain switch
- SJT type 3 conductor, 12' long cord
- Steel hub/spider aluminum paddle blades
- Coated steel guards
- Meets OSHA standards

DIMENSIONS	
24"	27" Diameter x 14.5" Depth
30"	33.5" Diameter x 14.5" Depth

## Motor Specifications

- 2-speed
- 1-Phase, 120V
- Ball bearing
- Frame size: 48
- Totally enclosed
- Permanent split capacitor
- Permanently lubricated
- 1/2" Shaft

## Product Specifications

- Oscillating model oscillates in a 90° arc or can be locked in a fixed position
- Metal gears in the oscillating mechanism allow the fan to operate at a maximum 30° downward tilt



PEDESTAL

## TPI Industrial Mounts



CEILING MOUNT

Note: 1/2" pipe piece required for assembly

I-BEAM MOUNT

Note: 1/2" pipe piece required for assembly

WALL MOUNT

SUSPENSION MOUNT

**Note: Motor, blades, guard, and mount are packed and shipped in a single UPS-able carton.**

## Standard Models

FAN TYPE		HIGH PERFORMANCE	MAX AMPS	STANDARD INDUSTRIAL	MAX AMPS	OSCILLATING	MAX AMPS						
MOTOR	HP	1/3		1/4		1/4							
	SPEEDS	2		2		2							
CFM / RPM	24"	7000 / 5200 1100 / 800	2.8	6800 / 5000 1100 / 800	2.5	6800 / 5000 1100 / 800	2.5						
	30"	8200 / 6200 1100 / 800	3.0	7900 / 6000 1100 / 800	2.7	7900 / 6000 1100 / 800	2.7						
COLOR		GRAY		GRAY		GRAY							
POLE ADJUSTMENT		52" to 78"		52" to 78"		52" to 78"							
WARRANTY		3 YEARS		1 YEAR		1 YEAR							
SIZE	TYPE of MOUNT	UPC# 686334	MODEL	WT. (lbs.)	LIST	UPC# 686334	MODEL	WT. (lbs.)	LIST	UPC# 686334	MODEL	WT. (lbs.)	LIST
24"	Pedestal Mount	799003	UHP 24-P	75	570	796231	ACU 24-P	75	424	796408	ACU 24-PO	79	644
	Wall Mount	799027	UHP 24-W	45	465	796248	ACU 24-W	45	354	796415	ACU 24-WO	49	539
	I-Beam Mount	799034	UHP 24-I	50	527	796255	ACU 24-I	50	415		----		---
	Ceiling Mount	799041	UHP 24-C	45	471	796262	ACU 24-C	45	359		----		---
	Suspension Mount	799058	UHP 24-S	43	458	796279	ACU 24-S	43	346		----		---
30"	Pedestal Mount	799010	UHP 30-P	78	588	796286	ACU 30-P	78	436	796422	ACU 30-PO	82	657
	Wall Mount	799065	UHP 30-W	48	483	796293	ACU 30-W	48	366	796439	ACU 30-WO	52	551
	I-Beam Mount	799072	UHP 30-I	53	545	796309	ACU 30-I	53	427		----		---
	Ceiling Mount	799089	UHP 30-C	48	489	796316	ACU 30-C	48	372		----		---
	Suspension Mount	799096	UHP 30-S	46	477	796323	ACU 30-S	46	359		----		---

# TPI Industrial 20" Circulators



PEDESTAL



WALL MOUNT



## Features

- Pull chain switch
- SJT type 3 conductor, 12' long cord
- Steel hub/spider aluminum paddle blades
- Coated steel guards
- Meets OSHA standards
- 1 Year limited warranty

DIMENSIONS
22" Diameter x 14.5" Depth

## Motor Specifications

- 2-Speed
- 1-Phase, 120V
- Ball bearing
- Frame size: 48
- 1/4 HP
- Permanent split capacitor
- Totally enclosed, permanently lubricated
- 1/2" Shaft

## Standard Models

UPC#	MODEL	STYLE	MOUNT TYPE	CFM / RPM	AMPS (HIGH)	WT. (LBS.)	LIST
686334							
868143	ACU 20-P	Unassembled all components and mount in one box	Pedestal Mount	5600 / 4100 1100 / 900	2.4	72	410
868150	ACU 20-W		Wall Mount			42	309
868471	ACH 20	Assembled Fan Head	None - use with any TPI "ACM" or "CACM" Mount			39	295

# TPI Industrial Circulator Components

## Motors

TYPE	UPC# 686334	MODEL	LIST
HEAVY DUTY	796132	HD-MOT	353
HIGH PERFORMANCE	799515	IHP-MOT	247
INDUSTRIAL	796330	AC-MOT	143
OSCILLATING	796446	AC-MOT-O	334

## Guards & Blades

TYPE	UPC# 686334	MODEL	LIST
YELLOW GUARD & BLADE FOR 1/2 HP MOTOR			
24"	796149	HD-24GB	199
30"	796156	HD-30GB	217
SILVER GUARD & BLADE FOR 1/2 HP (HD) MOTOR			
24"	796453	HD-24GB-C	174
30"	796460	HD-30GB-C	192
SILVER GUARD & BLADE FOR 1/3HP & 1/4HP MOTORS			
24"	796347	AC-24GB	148
30"	796354	AC-30GB	167

## Mounts

TYPE	UPC# 686334	MODEL	LIST
YELLOW MOUNTS			
PEDESTAL POLE & BASE	796095	HDM-P	174
WALL MOUNT	796101	HDM-W	68
I-BEAM MOUNT	796118	HDM-I	131
CEILING MOUNT	796125	HDM-C	75
GRAY MOUNTS			
PEDESTAL POLE & BASE	796187	ACM-P	167
WALL MOUNT	796194	ACM-W	63
I-BEAM MOUNT	796200	ACM-I	124
CEILING MOUNT	796217	ACM-C	66
SUSPENSION MOUNT	796224	ACM-S	54
POLE MOUNT	868181	ACMPM	88
WHEEL KIT	868136	ACM-WK	80
COMMERCIAL MOUNTS			
PEDESTAL POLE & BASE	869751	CACM-P	141
FDA WHITE MOUNTS (FOR USE WITH WASHDOWN FAN HEADS IN FOOD SERVICE APPLICATIONS)			
PEDESTAL POLE & BASE	868259	WACM-P	177
WALL MOUNT	868266	WACM-W	69

# TPI Industrial Specialty Circulator Heads



## Features

- No cord-junction box provided for hard wiring
- Steel hub/spider aluminum paddle blades
- Coated steel guards
- Meets OSHA standards
- 1 year limited warranty

## Motor Specifications

- All 1 Speed (except 277V which is 2 Speed)
- Totally enclosed, permanently lubricated
- Ball bearing



## Standard Models


GENERAL DESCRIPTION	MODEL	UPC# 686334	SIZE	MOTOR			CFM		AMPS (HIGH)					WT. (LBS)	LIST	
				HP	RPM	VOLTS	HIGH	LOW	120v 1 ph	240v 1 ph	277v 1 ph	240v 3 ph	480v 3 ph			
Hazardous Location Class I Group D Class II Group F & G Unassembled Head	ACH 24-EX1	855198	24"	1/4	1725	120 or 240 1-phase	8000	5	2.6	----	----	----	66	1022		
	ACH 30-EX1	855204	30"			9200										
	ACH 24-EX3	855211	24"			240 or 480 3-phase	8000	----	----	1.4	0.7	66	1090			
	ACH 30-EX3	855228	30"			9200										
240V / 480V 3-Phase Unassembled Head	ACH-24-TE3	855235	24"	1/4	1725	240 or 480 3-phase	8000	----	----		1.4	0.7	45	644		
	ACH-30-TE3	855242	30"			9200										
277 Volt Assembled Head	IHP 24-H-277	854139	24"	1/3	1125	277 1-phase	7000	5200	----	----	1	----	40	495		
	IHP 30-H-277	854221	30"				8200	6200							44	526
Wash down rated 120V / 240V 1-Phase Assembled Head	IHP 20-H-WD	872195	20"	1/3	1725	120 or 240 1-phase	7150	4.5	2.2		----	----	46	941		
	IHP 24-H-WD	854184	24"				8200								48	975
	IHP 30-H-WD	854191	30"				9350									

NOTE: Wash down rated fan heads have heavy zinc coated guards - Use FDA white coated mounts shown on page 8 for food service applications.

## Product Specifications

- Pedestal pole adjusts the center of fan from 52" to 78" and bolts to 27" diameter steel dome base with 5 carriage bolts
- I-beam mount & ceiling mount require 1-1/2" or longer pipe nipple for assembly (not supplied)
- Pole mount attaches to 4", 6", or 8" with U-bolts (not supplied)

## Standard Models

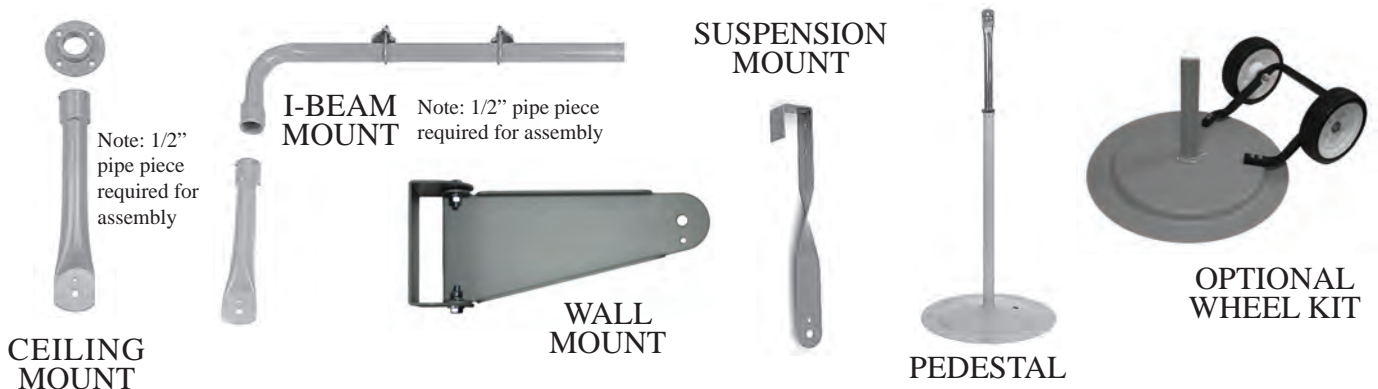

CIRCULATOR MOUNT	MODEL	UPC# 686334	SHIPPING WT. (LBS)	LIST
Pedestal	ACM-P	796187	34 lbs.	180
Wall Mount	ACM-W	796194	3 lbs.	69
I-Beam Mount	ACM-I	796200	9 lbs.	136
Ceiling Mount	ACM-C	796217	3 lbs.	75
Suspension Mount	ACM-S	796224	2 lbs.	62
Pole Mount	ACM-PM	868181	5 lbs	92
Optional Wheel Kit	ACM-WK	868136	4 lbs.	84

# TPI Commercial Circulators



These circulators should be used in clean and dry commercial applications - such as schools, shops, offices or warehouses.

## Commercial Circulator

**Motor, blades, guards, and mount are packed and shipped in a single UPS-able carton.**

### Features

- Pull chain switch.
- SJT type 3 conductor, 9' long cord.
- Coated steel guards with retaining clips.
- Steel hub/spider aluminum paddle blades.
- Pole adjusts center of fan from 43" to 60".
- Meets OSHA standards.
- 1 Year limited warranty.

### Motor Specifications

- 1-Phase
- 1/4 HP
- Ball bearing
- Open ventilated
- 120V
- 2 or 3-Speed
- Permanently lubricated
- Permanent split capacitor



WALL MOUNT

### Standard Models

UPC# 686334	MODEL	SIZE	MOUNT TYPE	CFM			AMPS (HIGH)	WT. (LBS.)	LIST
				HIGH	MED	LOW			
870627	CACU 24-P	24"	Pedestal Mount	5400	4900	4300	2.3	63	350
870641	CACU 24-W		Wall Mount						
869744	CACU 30-P	30"	Pedestal Mount	6000	5500	4800	2.4	66	387
870634	CACU 30-W		Wall Mount						

Note: Stocked models may differ in appearance from photograph

# TPI Commercial Oscillating Fans

**Commercial wall mount and pedestal fans now available from TPI.**

### Standard Models

RATING	UPC# 686334	MODEL	SIZE	HP	MOUNT TYPE	CFM			AMPS			RPM			WT. (LBS.)	LIST
						HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW		
	874892	CACU 24-PO	24"	1/4	Pedestal Mount	7500	6060	4050	1.45	1.15	1.1	1100	1020	930	68	410
	874915	CACU 24-WO			Wall Mount											
	874908	CACU 30-PO	30"	1/3	Pedestal Mount	8700	7500	6780	2.0	1.8	1.6	1100	1020	930	70	430
	874922	CACU 30-WO			Wall Mount											

Note: Photograph is a representation of stocked models. Actual model may vary in appearance.



# 42" & 48" TPI Commercial Belt Drive Portable Blowers



### Features

- Rocker switch
- SJT type cord - 3 conductor - 8' long
- Aluminum blade
- Spiral wire front and rear guards
- Powder coated 20 gauge steel housing
- 8" rubber wheels
- Meets OSHA standards / 1 Year limited warranty

### Motor Specification

- 2-Speed
- 120V
- Ball bearing
- 1-Phase
- ODP type
- Permanently lubricated

### Standard Models

UPC# 686334	MODEL	MOTOR HP	CFM		MAX AMPS	WT. (LBS.)	LIST
			HIGH	LOW			
870665	CPB 42-B	1/2	13,500	11,000	6.5	93	802
872270	CPB 48-B	3/4	15,000	12,000	9.0	129	1085

Note: Photograph is a representation of stocked models. Actual model may vary in appearance.

# 36" TPI Commercial Direct Drive Portable Blowers



SWIVEL

CPBS 30-D



CPB 36-D

### Features

- Rocker switch
- SJT type cord - 3 conductor - 6' long
- Spiral wire front and rear guards
- Powder coated 20 gauge steel housing
- 5" rubber wheels
- Meets OSHA standards
- 1 Year limited warranty

### Motor Specification

- 2-Speed
- 120 Volt, 1/3HP
- Ball bearing
- 1-Phase
- Open ventilated
- Permanently lubricated

### Standard Models

UPC# 686334	MODEL	CFM		MAX AMPS	CORD LENGTH	SWITCH	BLADES	WT. (LBS.)	LIST
		HIGH	LOW						
875356	CPB 30-D	6,300	5,500	3.6	6'	ROCKER	ALUMINUM	52	463
871037	CPBS 30-D	6,300	5,500	3.6	6'	ROCKER	ALUMINUM	60	527
872263	CPB 36-D	8,200	7,000	3.6	10'	ROTARY	STEEL	70	574

Note: Photograph is a representation of stocked models. Actual model may vary slightly in appearance.

# 36" & 42" TPI Industrial Direct Drive Portable Blowers



STANDARD MODEL



SWIVEL MODEL



### Features

- Comes in sizes 36" & 42"
- Rocker switch
- SJT type 3 conductor, 12' long cord
- Aluminum, 3 paddle blade
- Spiral, wire front and rear guards
- Corrosion and dent proof high density polyethylene housing
- 8" wheels
- 36" & 42" swivel model rotates 360° in 12-1/2° increments and locks in place with a steel locking pin
- Meets OSHA standards
- 1 Year limited warranty

### Motor Specifications

- 120V, 1-Phase
- 36"-1/3HP 42"-1/2HP
- Ball bearing
- Permanent split capacitor
- 2-Speed on 36" model
- 1-Speed on 42" model
- Permanently lubricated

### Standard Models

UPC#	MODEL	FAN		MOTOR HP	CFM / RPM		AMPS (HIGH)	SHIPPING WT.(LBS.)	LIST
		SIZE	TYPE		HIGH	LOW			
873048	PB 36-D	36"	STANDARD	1/3	12500 / 1040	9000 / 730	5.5	82	715
873055	PBS 36-D	36"	SWIVEL					110	974
873079	PB 42-D	42"	STANDARD	1/2	15,600 / 1040		6.0	102	1006
873086	PBS 42-D	42"	SWIVEL					128	1235

Note: Photograph is a representation of stocked models. Actual model may vary slightly in appearance.

# 48" TPI Industrial Direct Drive Portable Blowers



### Features

- Corrosion and dent proof high density polyethylene housing
- Rocker switch
- SJT type 3 conductor, 12' long cord
- Steel, 2 paddle blade
- Spiral, wire front and rear guards
- 10" wheels
- Swivel model rotates 360° in 12-1/2° increments and locks in place with a steel locking pin
- Meets OSHA standards
- 1 Year limited warranty

### Motor Specifications

- 1-Phase
- 3/4 HP
- Ball bearing
- Permanent split capacitor
- 120V
- 1-Speed
- Permanently lubricated

### Features

UPC#	MODEL	SIZE	FAN TYPE	MOTOR HP	CFM \ RPM	AMPS (HIGH)	DIMENSIONS			SHIPPING WT.(LBS.)	LIST
							"H"	"D"	"W"		
799782	PB 48-D-OP	48"	STANDARD	3/4	17,300 / 824	10.3	58.5	29	55.5	117	1454
799805	PBS 48-D-OP	48"	SWIVEL	3/4	17,300 / 824	10.3	----	----	----	142	1659

Note: Photograph is a representation of stocked models. Actual model may vary slightly in appearance.

# 36", 42", & 48" TPI Industrial Belt Drive Portable Blowers



STANDARD MODEL



SWIVEL MODEL




### Features

- Comes in sizes 36", 42", and 48"
- Rocker switch on 120V, Single Phase models
- SJT type 3 conductor, 12' long cord on 120V, Single Phase models / no cord on dual voltage models
- Aluminum, 4 paddle blade
- Spiral, wire front and rear guards
- Corrosion and dent proof high density polyethylene housing
- 10" wheels
- Swivel model rotates 360° in 12-1/2° increments and locks in place with a steel locking pin
- External junction boxes on dual voltage models allow units to be wired for either voltage without removing guards
- Hazardous location models have explosion proof motors, metal housings, and external junction boxes rated for Class I, Group D and Class II, Groups E, F, & G, UL Listed
- Meets OSHA standards • 1 year limited warranty

### Motor Specifications

- 1-Speed
- Ball bearing
- Permanently lubricated

### Standard Models

MOTOR LISTING	SIZE	MOTOR					STANDARD MODEL				SWIVEL MODEL			
		TYPE	HP	CFM	RPM	AMPS	UPC# 686334	MODEL	WT. (LBS.)	LIST	UPC# 686334	MODEL	WT. (LBS.)	LIST
	36"	120 V 1 PH ODP	1/2	14,500	500	8.0	796477	PB 36-B	120	1065	796507	PBS 36-B	145	1254
	42"		3/4	18,200	430	11.0	796484	PB 42-B	135	1216	796514	PBS 42-B	160	1442
	48"		1	22,700	390	15.0	796491	PB 48-B	155	1365	796521	PBS 48-B	180	1625
	36"	240/480 V 3 PH ODP	1/2	14,500	500	2.3 / 1.1	850865	PB 36-B-3	127	1422	850926	PBS 36-B-3	152	1676
	42"		3/4	18,200	430	3.3 / 1.5	850872	PB 42-B-3	143	1594	850933	PBS 42-B-3	168	1988
	48"		1	22,700	390	3.4 / 1.7	850889	PB 48-B-3	164	1814	850940	PBS 48-B-3	189	2092
	36"	120/240 V 1 PH EXP	1/2	14,500	500	7.8 / 3.9	850896	PB 36-B-HL*	135	2143	850957	PBS 36-B-HL	160	2366
	42"		3/4	18,200	430	10.8 / 5.4	850902	PB 42-B-HL*	150	2256	850964	PBS 42-B-HL	175	2696
	48"		1	22,700	390	13.2 / 6.6	850919	PB 48-B-HL*	173	2645	850971	PBS 48-B-HL	198	2917

Note: Products listed in this section are custom built and subject to 100% cancellation/restocking charges.  
 Note: Photograph is a representation of stocked models. Actual model may vary slightly in appearance.



# Industrial Workstation Floor Fans

## Features

- Rotary switch
- Head tilts 360°
- Coated steel guards
- SJT type 3 conductor, 10' long cord
- Steel hub/spider aluminum paddle blades
- Meets OSHA standards
- 1 Year limited warranty



FLOOR MODEL



HIGH STAND



## Motor Specifications

- Sleeve bearing
- Totally enclosed
- 1-Phase, 120V
- 3-Speed
- Permanently lubricated
- Frame size: 42
- 5/16" Shaft

## Standard Models

SIZE	UPC# 686334	MODEL	FAN TYPE	MOTOR HP	CFM / RPM			DIMENSIONS			MAX AMPS	SHIPPING WT. (LBS)	LIST
					HIGH	MED	LOW	"H"	"W"	"D"			
12"	798617	F-12-TE	FLOOR MODEL	1/12	1650 / 1590	1420 / 1380	1120 / 1080	15-1/4"	14-1/2"	9-1/2"	1.1	13	138
18"	797290	F-18-TE		1/8	4600 / 1660	4200 / 1550	3200 / 1370	20-1/2"	20-1/2"	10-1/2"	1.5	20	173
24"	852852	F-24-TE		1/8	5850 / 1634	5200 / 1484	3600 / 1200	26"	26"	10-1/2"	2.4	23	322
18"	797306	F-18H-TE	HIGH STAND	1/8	4600 / 1660	4200 / 1550	3200 / 1370	53"	25"	27"	2.2	27	253
24"	854061	F-24H-TE		1/8	5850 / 1634	5200 / 1484	3600 / 1200	53"	30"	27"	2.4	30	423

# TPI Commercial Workstation & Floor Fans

## Features

- Rotary switch
- SJT type cord - 3 conductor - 7' long
- Aluminum blade
- Coated steel guards with retaining clips
- Meets OSHA standards
- 1 Year limited warranty



CF-20



CU-20

## Motor Specification

- 3-Speed
- 120V
- Sleeve bearing
- 1-Phase
- Open ventilated
- Permanently lubricated

## Standard Models

UPC# 686334	MODEL	SIZE	TYPE	MOTOR HP	CFM			MAX AMPS	WT. (LBS.)	LIST
					HIGH	MED	LOW			
872300	CF-12	12"	FLOOR	1/12	2100	1750	1500	0.6	10	80
872317	CF-18	18"	FLOOR	1/5	3150	2700	2550	1.4	16	100
870658	CF-20	20"	FLOOR	1/5	3450	3100	2950	1.9	18	138
523332	CU-20	20"	WORKSTATION	1/5	3450	3100	2950	1.9	18	166

Units should be used in clean, dry, commercial applications.

Note: Photograph is a representation of stocked models. Actual model may vary in appearance.



# Industrial Mounted Workstation Fans



### Features

- Pull chain switch
- Head rotates 360° vertically and horizontally
- Coated steel guards
- SJT type 3 conductor, 10' long cord
- Steel hub/spider aluminum paddle blades
- Meets OSHA standards • 1 Year limited warranty

### Motor Specifications

- Sleeve bearing
- Totally enclosed, permanently lubricated
- Frame size: 42
- 3-Speed
- 1-Phase, 120V
- 5/16 Shaft

### Standard Models

FAN SIZE	UPC# 686334	MODEL	MOTOR HP	CFM / RPM			DIMENSIONS			MAX AMPS	SHIPPING WT (LBS)	LIST
				HIGH	MED	LOW	"H"	"W"	"D"			
12"	798600	U-12-TE	1/12	1650 / 1590	1420 / 1380	1120 / 1080	15-1/4"	14-1/2"	9-1/2"	1.1	13	144
18"	797283	U-18-TE	1/8	4600 / 1660	4200 / 1550	3200 / 1370	21-1/2"	20-1/2"	10-1/2"	2.2	20	178
24"	854078	U-24-TE	1/8	5850 / 1634	5200 / 1484	3600 / 1200	27"	26"	10-1/2"	2.4	23	334

Note: Mount with one bolt or lag screw to walls, ceilings, work benches, machines or any surface.

### Application Photos



### Pipe Mount Adaptor



PIPE DIAMETER	UPC# 686334	MODEL	LIST
1"	851244	PM-1	48
1-1/2"	851251	PM-1.5	53
2"	851268	PM-2	59
2-1/2"	851275	PM-2.5	64
3"	851282	PM-3	69

# Workstation Oscillating Office Fans



STAND FAN



DESK FAN



### Features

- 3-speed oscillating fans with push button controls
- 3 conductor SPT cord & plug
- White powder coated wire mesh guards
- White plastic housing and blade
- Stand fan extends to 40" height
- Meets OSHA standards
- 1 Year limited warranty

### Standard Models

SIZE	UPC# 686334	MODEL	FAN TYPE	SPEEDS	CFM HIGH	AMPS HIGH	SHIPPING WT. (LBS.)	LIST
12"	851305	ODF-12	DESK	3	1200	0.4	5.4	68
16"	851312	ODF-16	DESK	3	2100	0.5	8.5	80
16"	851329	OSF-16	STAND	3	2100	0.5	15.5	101

# Workstation Wall Mount Fan With Pivoting Arm

18" HIGH VELOCITY FAN MOUNTED ON 24", 40", or 60" PIVOTING ARMS



### Mounting Arm Features

- 1-1/2" square, 14 gauge, steel tubing
- 3" x 5" x 3/16" mounting plate attaches with (4) 3/8" bolts
- 5' long., 18/3 SJTW conductor cord and NEMA 5-15 grounded plug
- Dual electrical outlets embedded in arm to allow connection of modular fan and optional light

### Modular Fan Features

- 18" high velocity circulator, with 3 speed, 1/8 HP, 115V, 1-Phase permanently lubricated, totally enclosed, PSC motor
  - Modular fan plugs into electrical outlet on arm
  - Coated steel guards / Aluminum blades
  - Meets OSHA standards / 1 year limited warranty
- Use on loading docks to cool off workers entering hot truck trailers.      Use at factory workstations to cool off people or the machines.

### Standard Models

UPC#	MODEL	FAN SIZE	ARM LENGTH	FAN CFM			MAX AMPS	SHIPPING WT (LBS)	LIST
				HIGH	MED	LOW			
800914	24-LDF-TE	18"	24"	4600	4200	3200	2.2	31 lbs.	293
800921	40-LDF-TE	18"	40"					38 lbs.	365
800938	60-LDF-TE	18"	60"					44 lbs.	392

### Optional Modular Lights

#### Light Features

- Plugs into embedded outlet in arm
- On/Off switch and wire guard included
- Bulb included with DKL-QH and DKL-FL



### Standard Models

UPC#	MODEL	LIGHT HEAD TYPE	MAX WATTS	MAX LUMENS	AVE. BULB LIFE (HRS)	SHIPPING WT (LBS)	LIST
686334							
446563	DKL-INC	Incandescent	300	3,700	2,000	5 lbs.	74
446570	DKL-QH	Quartz Halogen	500	11,000	2,000	6 lbs.	111
484336	DKL-FL	Fluorescent	55	3,000	10,000	7 lbs.	129
470865	DKL-LED	LED	12	960	50,000	5 lbs.	412

## Low Velocity "Navy Style" Workstation Fan

### Features

- 12" all metal, gray powder coated fan that can be wall, ceiling or bench mounted
- Direct wire electrical connection
- Toggle switch
- Fan head tilts 90° in horizontal and vertical plane
- Meets OSHA standards
- 1 year limited warranty

Designed to circulate air in confined spaces aboard US Navy ships  
Navy spec "MIL-F-68F"



WALL MOUNT



BENCH MOUNT      CEILING MOUNT

### Standard Models

SIZE	UPC#	MODEL	MOTOR HP	CFM / RPM		AMPS HIGH	SHIPPING WT. (LBS)	LIST
				HIGH	LOW			
12"	870894	N-12	1/12	1540 / 1350	930 / 750	0.6	12	304

# Portable Workstation Evaporative Coolers



## Evap-Mini - Features

- Lowers temperatures up to 30°F
- Water level sight tube and sump drain
- 3/4" garden hose connection for longer running
- Durable one-piece, rust free, leak-proof molded polyethylene housing
- Environmentally friendly efficient and effective resource use
- Cools for a fraction of the cost of air conditioning
- Cools without chemicals or refrigerants
- Long-term dependability-near maintenance-free operation
- Shipped completely assembled - ready to operate out of the box



## PACKA77 - Features

- Lowers temperatures up to 30°F
- Low purchase cost and electricity usage
- Environmentally friendly (no refrigerant gas)
- Maximum portability; includes remote control
- Ideal for indoor / outdoor use

## Standard Models

UPC#	MODEL	MOTOR HP	UNIT VOLTS	UNIT AMPS	CFM (2 Speed)		EFFECTIVE SQ. FT.	INTERNAL WATER (Gallons)	DIMENSIONS H x W x D (Inches)	WT. (LBS.)	LIST
					HIGH	LOW					
539777	EVAP-Mini 500	1/3	120	2.5	2000	1600	500	10	31" x 29" x 25"	72	1,280
539784	EVAP-Mini 700	1/3		5.6	3000	2400	700	16	38" x 29" x 25"	113	1,662
539791	PACKA77	----	120	2	----	----	600	8	44.3" x 17" x 22"	71	1,087

# 16" Portable Workstation Evaporative Cooler



**15°F - 25°F OF EVAPORATIVE COOLING  
- PLUS -  
6°F - 8°F OF WIND CHILL COOLING**

EVAPORATIVE COOLING TEMPERATURE DROPS			
AIR TEMPERATURE	RELATIVE HUMIDITY		
	10%	30%	50%
80°	-22°	-16°	-10°
90°	-25°	-18°	-12°
100°	-29°	-21°	-14°
110°	-32°	-23°	-15°



**42 Gallon internal water reservoir that allows the unit to operate approximately 8 hours without being connected to an external water source**

**PROVIDES COOLING UP TO A 900 SQ. FT. AREA**

## Features

- Durable polyethylene housing features leakproof, one piece construction
- Lowers temperatures 15-25°F depending on climate conditions
- Easy rolling poly on poly casters (EVAP16-3)
- Shipped completely assembled, ready to use
- Water level sight tube located on front of unit to indicate water level in tank
- Manufactured in USA



## Standard Models

UPC#	MODEL	MOTOR HP	UNIT AMPS	CFM			EFFECTIVE SQ. FT.	INTERNAL WATER (Gallons)	DIMENSIONS L x W x H (Inches)	WT. (LBS.)	LIST
				HIGH	MED	LOW					
874809	EVAP16-3	1/2	4.6	3900	3500	2500	900	42	23 x 37.5 x 59	145	2,529



# Loading Dock Lights - Fully Assembled Standard Duty Loading Dock Arms

(Light Head and Arm Bolted Together and Shipped in One Carton)

## Standard Models (120 V)



UPC#	MODEL	ARM LENGTH	# OF ARMS	MAX WATTS	WT. (LBS.)	LIST
INCANDESCENT						
446648	DKL-24-A	24"	1	300	10	172
385404	DKL-25-FLX	25"	1		19	179
446655	DKL-40VA-A	40"	2		14	189
446662	DKL-60VA-A	60"	2		17	227
QUARTZ HALOGEN						
446709	DKL-24-QH-A	24"	1	500	11	202
446716	DKL-40VA-QH-A	40"	2		15	227
459587	DKL-40VA-SQH-B	40"	2		7	353
446723	DKL-60VA-QH-A	60"	2		18	264
LED						
470827	DKL-24-LED	24"	1	12	11	447
470834	DKL-40VA-LED	40"	2		15	464
470841	DKL-60VA-LED	60"	2		18	502
METAL HALIDE						
446730	DKL-24-MH-A	24"	1	100	13	583
446747	DKL-40VA-MH-A	40"	2		17	613
446754	DKL-60VA-MH-A	60"	2		21	650
FLUORESCENT						
470797	DKL-24-FL-A	24"	1	55	11	221
485036	DKL-40VA-FL-A	40"	2		15	246
470810	DKL-60VA-FL-A	60"	2		18	282

## Ceiling Mounted Incandescent Flex Arm



### Features

- Flexible elastomer arm moves when hit and then returns light to original position
- Ceramic socket will accept incandescent bulbs, R-40 or PAR bulbs up to 300W
- On-off toggle switch on light head

## Standard Models

UPC#	MODEL	ARM LENGTH	WATTS	VOLTS	MAX LUMENS	AVE. BULB LIFE (HRS)	WT. (LBS.)	LIST
686334	DKL-25-FLX	25"	300	120	3,700	2000	7	179

\*Bulb not included.

## Light Head Accessories

### Standard Models



UPC#	MODEL	DESCRIPTION	WATTS	USED WITH	WT. (LBS.)	LIST
686334	LG-1	Lamp Guard	-	INC, LED, or FL Fixtures	2	35
485050	SSE-55	Fluorescent Bulb	55	ALL FL Light heads	1	50
470858	LED-12	LED Bulb	12	ALL LED Light heads	1	281
310598	QHL-500	Quartz Halogen Lamp	500	ALL QH Light heads	1	15
310680	MH-100	Metal Halide Bulb	100	ALL MH Light heads	1	92

Note: Lamp guards are included with every dock light fixture.



# Loading Dock Lights - Modular

## Modular Lights



### Features

- 14" long, 18/3 conductor cord plugs into electrical junction box on arm
- On/Off switch & wire guard included with each light head
- Bulb included with all light heads except DKL-INC

### Standard Models

UPC#	MODEL	LIGHT HEAD TYPE	MAX WATTS	MAX LUMENS	AVE. BULB LIFE (HRS)	WT. (LBS.)	LIST
686334							
446563	DKL-INC	Incandescent	300	3,700	2,000	5 lbs.	74
446570	DKL-QH	Quartz Halogen	500	11,000	2,000	6 lbs.	111
470865	DKL-LED	LED	12	960	50,000	7 lbs.	412
446600	DKL-MH	Metal Halide	100	9,000	15,000	10 lbs.	534
484336	DKL-FL	Fluorescent	55	3,000	10,000	7 lbs.	129

## Mounting Arms



The outer arm on 40" & 60" arms will swing 300° in horizontal plane & 210° in vertical plane

### Features

- 1-1/2" square, 14 gauge, steel tubing
- 3" x 5" x 3/16" mounting plate attaches with (4) 3/8" bolts
- 5' long, 18/3 SJTW conductor cord and NEMA 5-15 grounded plug

### Standard Models

UPC#	MODEL NUMBER	ARM LENGTH	TOTAL # OF ARMS	WT. (LBS.)	LIST
686334					
446532	DKL-24-ARM	24"	1	11 lbs.	92
446549	DKL-40VA-ARM	40"	2	18 lbs.	117
446556	DKL-60VA-ARM	60"	2	24 lbs.	148
446532	24-LDA**	24"	1	11 lbs.	92
446617	40-LDA**	40"	3	18 lbs.	159
446624	60-LDA**	60"	3	24 lbs.	184

\*\*Indicates heavy duty dock arms.

## Loading Dock Arm, Fan, & Light Head



### Features

- 18" high velocity circulator, with 3 speed, 1/8 HP, 115V, 1phase permanently lubricated, totally enclosed, PSC motor
- Modular fan plugs into electrical outlet on arm
- Coated steel guards and aluminum blades.

### Fan Head Only

UPC#	MODEL NUMBER	CFM			AMPS HIGH	WT. (LBS.)	LIST
		HIGH	MED	LOW			
686334							
797184	LDF-18-TE	4600	4200	3200	2.2	20 lbs.	182

# Machine Tool Lights

## Water Resistant Fluorescent Tube Lights

52



Remote Ballast with Cordset



Internal Ballast with Cordset



Remote Ballast

### Features

- ETL C/US Listed for NEMA Type 13 applications - oil / water / coolant spray areas (not submersible) and dusty atmospheres.
- Available with a durable, lightweight, economical, shatter resistant polycarbonate tube housing
- Model 21-TLB-IB-C includes a borosilicate (or glass) lens for greater scratch & chemical resistance
- Stainless steel mounting hardware and fluorescent bulb are included
- 8' long, 18/3 SJTOW cord with NEMA 5-15 plug on models with cords
- EOB units with internal ballast are factory wired for 120V w/ 8' long cordset. Units can be field converted for direct wiring for 90V to 277V. Terminal block provided for easy wire installation.

### Standard Models

UPC# 686334	MODEL #	DESCRIPTION	WATTS	VOLTS	LUMENS	OVERALL LENGTH	TUBE MATERIAL	BALLAST INCLUDED	WT. (LBS.)	LIST
282345	15-TLP-IB-C	REMOTE BALLAST WITH CORDSET	18	120V	1250	15"	Polycarbonate	Yes	9	459
282130	21-TLB-IB-C		36		2900	21"	Glass	Yes	10	526
282321	21-TLP-IB-C		36		2900	21"	Polycarbonate	Yes	10	491
482943	23-TLP-EOB-C	INTERNAL BALLAST WITH CORDSET	18	90 to 277V	1250	23"	Polycarbonate	Yes	6	393
482950	29-TLP-EOB-C		36		2900	29"	Polycarbonate	Yes	7	416
484343	29-TLP-A	REMOTE BALLAST	50	120V	4300	29"	Polycarbonate	Yes	7	441
282499	52-TLP-A		100		8400	52"	Polycarbonate	Yes	12	607
482936	23-TLP-24VDC	INTERNAL BALLAST	18	24VDC*	1250	23"	Polycarbonate	Yes	6	386

\* Includes 2 ft. lead wires

### Accessories - Magnetic Base and Replacement Lamps



MAGNETIC BASE

UPC# 686334	MODEL	DESCRIPTION	USED WITH	WT. (LBS.)	LIST
445757	TL-MB	Magnetic Bases & Fasteners (Pair)	ALL Tube Lights	1	56
310338	TL-RB-18	Fluorescent Replacement Bulb, 18W, PL-L	All 18 Watt Models	1	58
310086	TL-RB-36	Fluorescent Replacement Bulb, 36W, PL-L	All 36 Watt Models	1	62
310826	TL-RB-50	Fluorescent Replacement Bulb, 50W, PL-L	All 50 & 100 Watt Models	1	68

## Incandescent

### Features

- Patented disc and collar swivel joints with adjustable bar knobs for securing arms into a variety of positions
- Shades constructed of a 22 gauge steel and arms made of 5/8" steel tubing, with reach from 25" to 44"
- Charcoal gray powder coated finish
- Horizontal or vertical bolt down mounting bracket
- 10 amp rocker type on-off switch and lamp socket
- Includes an 8' 18/3 SJTO Cordset with NEMA 5-15 molded grounded plug for 120V operation
- FTT Model includes (2) 13-Watt fluorescent twin tubes, internal white reflector, and protective acrylic lens
- Bulb not included with BH, BP, or VCX Models



BH TYPE BP TYPE



FTT TYPE VCX TYPE

### Standard Models

UPC#	MODEL	BULB TYPE	BULB DESCRIPTION	WATTS	MAX LUMENS	AVE. BULB LIFE (HRS)	OVER-ALL REACH	WT. (LBS.)	LIST
686334									
381871	5-BH-701A	Incandescent	60W medium base A-19	60	870	1,000	25"	5	154
381895	55-BH-701A						35"		165
381925	66-BH-701A						44"		169
381956	55-BP-701A		75W medium base A-19	75	1220	750	35"	6	179
442887	66-BP-701A						44"		184
381215	55-VCX-701B		100W medium base A-19, R-30 or PAR 38	100	1470	750	29"	6	189
381314	66-VCX-701B	38"					197		
283632	66-FTT26-701B	Fluorescent	(2) 13W Twin Tubes	26	1800	10,000	38"	9	349

## Medium Duty, Flexible Arm, Incandescent, Machine Tool Lights

### Features

- Chrome plated, flexible arm
- 8' 18/3 or 18/2 SPT cordset with molded plug
- Turn knob on-off switch
- Phenolic shade
- Bulb not included



15-MC-901

12-R-M-3



### Standard Models

UPC#	MODEL	BULB	BASE	MAX LUMEN	OVER-ALL REACH	WT. (LBS.)	LIST
686334							
445764	15-MC-901	25 Watt	Vertical Bolt-on Base	180	15"	2	74
442305	12-R-M-3	60 Watt	Magnetic Base	865	12"	3	129

## Illuminated Fluorescent Magnifiers

### Features

- 5", 8-diopter (3X power) magnifying clear lens for 200% magnification of an object with a focal length of 5"
- Suspension spring balanced arm assembly allowing up to 45" reach, with finger tighten control knobs to lock arms and shade into position
- Housing consists of a sturdy white plastic 8-1/2" shade with an on-off rocker switch and glare protection cover located on the top of the shade
- Includes die-cast clamp-on base to attach to a flat surface up to 2-1/2" thick
- Factory installed 22W, 120V, circline fluorescent lamp, and protective lens



### Standard Models

UPC#	MODEL	MAGNIFICATION POWER	BULB	WATTS	MAX LUMENS	AVE. BULB LIFE (HRS)	OVER-ALL REACH	WT. (LBS.)	LIST
686334									
485159	45-MAG-W	3X	22W. Circline	22	1800	16,000	45"	10	222
312035	MAG-22W		22W., 120V., T-9 deluxe cool white circline replacement lamp					1	29