

Order From
 Dick Jones Sales, Inc.
 258 Baltimore St. PO Box 141
 Hanover, PA 17331
 Phone 800-441-9955
 Fax 800-253-4036
 dickjones@dickjonessales.com

FORK TRUCK ATTACHMENTS


SUPPLEMENT 112




LIFT MASTER BOOMS



HOISTING HOOKS

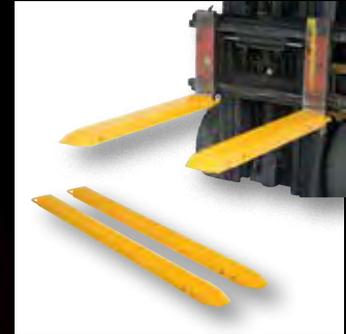

FORK EXTENSIONS

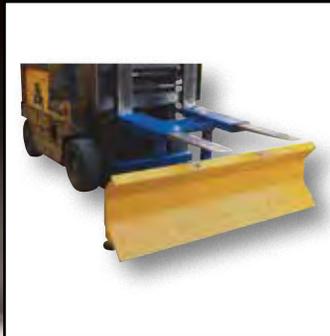

SNOW PLOWS




WORK PLATFORMS



SELF-DUMPING HOPPERS

Lift Master Booms.....	E1
Hoisting Hooks	E2
Floor Scrapper	E3
Magnetic Sweepers	E4
Rug Ramps / Carpet Poles.....	E5
Fork Extensions.....	E6
Trash Can Dumpers	E8
Snow Plows & Front Loaders	E9
Work Platforms	E10-E11
Self Dumping Hoppers	E13-E18
Tilt Trucks	E19

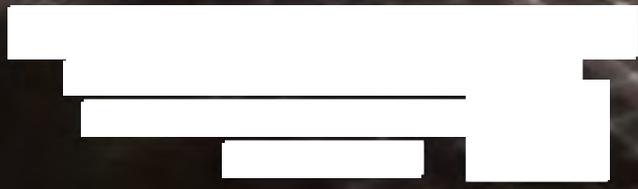

Always consult fork truck manufacturer prior to using any attachment that affects the load center of the fork truck!

Lift Master Booms

Unique performance, convenience, and safety features are built into every Lift Master Boom. Fabricated from structural steel with welding to meet AWS creates a rugged and durable boom that will provide long term service. Telescopic units come with an infinitely adjustable locking screw (except orbit booms which feature a locking detent). Fork pockets for 4,000 pound uniform capacity models measure 7½"W x 2½"H usable on 24" centers. Usable fork pockets are 7¼"W x 2¼"H for 6,000 and 8,000 pound uniform capacity models. Optional fork pocket centers available. A safety restraint secures the boom to the fork truck for safe operation. Each unit includes two lifting hooks.



ORBITING BOOM
model LM-OBT-4-24

48 Hours
to Ship



LIFT MASTER BOOM
model LM-1T-6-24



ECONOMY BOOM
model LM-EBT-4-24



FIXED 15° BOOM
model LM-F15-4-24

MODEL NUMBER	DESCRIPTION	OVERALL HEIGHT	OVERALL EXTENDED LENGTH	UNIFORM CAPACITY	NET WT. (POUND)
TELESCOPING STYLE					
LM-1T-4-24	LIFT MASTER ONE	26"	153"	4,000 lb.	434
LM-OBT-4-24	ORBIT BOOM	28"	147"	4,000 lb.	433
LM-HRT-4-24	HIGH-RISE BOOM	80"	94"	4,000 lb.	707
LM-EBT-4-24	ECONOMY BOOM	13"	153"	4,000 lb.	333
LM-F15-4-24	FIXED 15 DEGREES	32 ^{15/16} "	147"	4,000 lb.	370
LM-1T-6-24	LIFT MASTER ONE	26"	153"	6,000 lb.	480
LM-OBT-6-24	ORBIT BOOM	28"	147"	6,000 lb.	476
LM-HRT-6-24	HIGH-RISE BOOM	80"	94"	6,000 lb.	833
LM-EBT-6-24	ECONOMY BOOM	13"	153"	6,000 lb.	377
LM-1T-8-24	LIFT MASTER ONE	27"	153"	8,000 lb.	647
LM-OBT-8-24	ORBIT BOOM	28"	146"	8,000 lb.	622
LM-EBT-8-24	ECONOMY BOOM	12"	152"	8,000 lb.	577
NON-TELESCOPING STYLE					
LM-1NT-4-24	LIFT MASTER BOOM	23½"	82"	4,000 lb.	403
LM-OBNT-4-24	ORBIT BOOM	27"	81"	4,000 lb.	337
LM-HRNT-4-24	HIGH-RISE BOOM	79"	51"	4,000 lb.	810
LM-EBNT-4-24	ECONOMY BOOM	13"	82"	4,000 lb.	258
LM-1NT-6-24	LIFT MASTER ONE	23½"	82"	6,000 lb.	478
LM-OBNT-6-24	ORBIT BOOM	27"	81"	6,000 lb.	628
LM-HRNT-6-24	HIGH-RISE BOOM	79"	51"	6,000 lb.	697
LM-EBNT-6-24	ECONOMY BOOM	13"	82"	6,000 lb.	291
LM-1NT-8-24	LIFT MASTER ONE	23½"	80"	8,000 lb.	595
LM-OBNT-8-24	ORBIT BOOM	27"	80"	8,000 lb.	792
LM-EBNT-8-24	ECONOMY BOOM	13"	81"	8,000 lb.	418

LARGER FORK POCKETS 8¼"W x 4¼"H (inside dimensions), model LM-FP

Shorty Lift Master Booms

Short boom length is ideal for tight areas. Choose either telescoping or non-telescoping design. Includes built-in fork pockets, safety restraint, and two lifting hooks. Overall width is 32". Steel construction.

MODEL NUMBER	DESCRIPTION	OVERALL HEIGHT	OVERALL LENGTH	UNIFORM CAPACITY	NET WT. (POUND)
LMS-EBT-46-4	TELESCOPING	13"	53 ^{7/8} " to 94 ^{3/8} "	4,000 lb.	248
LMS-EBT-46-6	TELESCOPING	13"	53 ^{7/8} " to 94 ^{3/8} "	6,000 lb.	296
LMS-EBT-46-8	TELESCOPING	11½"	52½" to 93"	8,000 lb.	430
LMS-EBNT-40-4	NON-TELESCOPING	11 ^{15/16} "	50 ^{7/8} "	4,000 lb.	214
LMS-EBNT-40-6	NON-TELESCOPING	11 ^{15/16} "	50 ^{7/8} "	6,000 lb.	244
LMS-EBNT-40-8	NON-TELESCOPING	11½"	49½"	8,000 lb.	320

Hook Plates

Hook Plates enable any fork truck to safely lift a load using chains, cables, or slings. Features slanted fork openings measuring 6¼" wide by 1¾" high to prevent the hook plate from being used upside down. A hook with anchor shackle is included. A safety restraint secures the unit to the fork truck.

MODEL NUMBER	HOOK TYPE	HEIGHT W/O HOOK	OVERALL WIDTH	UNIFORM CAPACITY	NET WT. (POUND)
LM-HP4-S	SWIVEL	6"	24"	4,000 lb.	23
LM-HP4-R	RIGID	6"	24"	4,000 lb.	23
LM-HP6-S	SWIVEL	6"	24"	6,000 lb.	25
LM-HP6-R	RIGID	6"	24"	6,000 lb.	25



NON-TELESCOPING
ECONOMY BOOM
model LM-EBNT-4-24

48 Hours
to Ship




NON-TELESCOPING
SHORTY BOOM
model LMS-EBNT-40-4



48 Hours
to Ship

HOOK PLATE
model LM-HP4-R

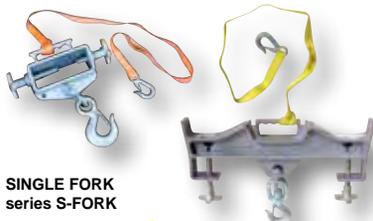


SINGLE FORK series S-FORK




DOUBLE FORK series D-FORK



SINGLE FORK AUTO-TENSION model S-FORK-4-AT

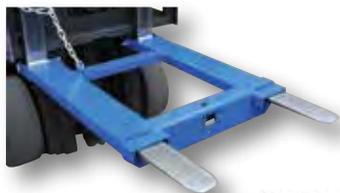

FORK TRUCK BASE model HOOK-BASE-44

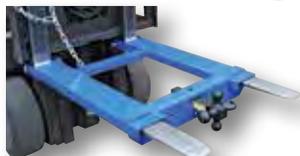

FORK TRUCK BASE series HOOK-BASE (shown with optional model HITCH-3B)



TOW BALLS series BALL



PINTLE HOOK model PINTLE



THREE BALL TOW HITCH model HITCH-3B



SWIVEL HOOK WITH SHACKLE model HOOK-S-4



RIGID HOOK WITH SHACKLE model HOOK-R-4

Hoisting Hooks

Convert your fork truck into a hook with anchor in a matter of seconds. The easy to attach Hoisting Hook does not require the assistance of special tools. Secured to the fork truck by means of a 36" long safety restraint and screw clamps. Available in single or double fork design. Units are zinc plated. Hook with shackle included. Model S-FORK-4-AT, Auto-Tension Hoisting Hook, offers a unique design and adds tension as weight is added.

MODEL NUMBER	DESCRIPTION HOOK TYPE	USABLE FORK POCKET SIZE (W x H)	UNIFORM CAPACITY	NET WT. (POUND)
S-FORK-4/6-R	SINGLE FORK/RIGID	6" x 2 1/4"	4,000 lb.	15
S-FORK-4/6-S	SINGLE FORK/SWIVEL	6" x 2 1/4"	4,000 lb.	15
D-FORK-4-R	DOUBLE FORK/RIGID	6 13/16" x 2 1/2"	4,000 lb.	31
D-FORK-4-S	DOUBLE FORK/SWIVEL	6 13/16" x 2 1/2"	4,000 lb.	31
D-FORK-10-S	DOUBLE FORK/SWIVEL	6 13/16" x 3 1/2"	10,000 lb.	53
S-FORK-4-AT	SWIVEL, SINGLE AUTO-TENSION	5 1/2" x 1 7/8"	4,000 lb.	24

Fork Truck Bases with Optional Tow Balls & Pintle Hook

Convert your fork truck into a tow truck for moving trailers and other portable equipment. Simple design slides onto forks and secures into place with safety pins and a safety restraint. Welded steel construction with powder coat blue finish. 5"W x 2"H usable fork pockets. Optional pintle hook, tow balls, and lifting hooks (see below) available. Bolt on design.

MODEL NUMBER	DESCRIPTION	FORK LENGTH	LENGTH TO CENTER OF BALL	UNIFORM CAPACITY	NET WT. (POUND)
HOOK-BASE-32	FORK BASE	36"	32"	4,000 lb.	139
HOOK-BASE-38	FORK BASE	42"	38"	4,000 lb.	162
HOOK-BASE-44	FORK BASE	48"	44"	4,000 lb.	166

ABOVE MODELS WORK WITH BALL-178, BALL-200, BALL-2516, HOOK-S-4, HOOK-R-4, PINTLE, HITCH-3B

MODEL NUMBER	DESCRIPTION	BALL DIAMETER	SHANK DIAMETER	UNIFORM CAPACITY	NET WT. (POUND)
BALL-178	TOW BALL	1 7/8"	1"	2,000 lb.	3
BALL-200	TOW BALL	2"	1"	3,500 lb.	3
BALL-2516	TOW BALL	2 5/16"	1"	7,500 lb.	4

MODEL NUMBER	DESCRIPTION	JAW OPENING	UNIFORM TONGUE CAPACITY (LB.)	UNIFORM TOW CAPACITY	NET WT. (POUND)
PINTLE	PINTLE HOOK	1 3/4"	2,000	10,000 lb.	11

Three Ball Tow Hitch

The Three Ball Hitch can easily be attached to a fork truck base and used in a wide variety of applications. The unit features three different sized ball hitches on one unit for user convenience. Steel construction with powder coat black finish. Capacities below are uniform capacities.

MODEL NUMBER	BALL 1 SIZE	BALL 1 CAPACITY	BALL 2 SIZE	BALL 2 CAPACITY	BALL 3 SIZE	BALL 3 CAPACITY	NET WT. (POUND)
HITCH-3B	2 5/16"	6000 lb.	2"	3500 lb.	1 7/8"	2,000 lb.	11

Hooks with Shackle

Easily connects to Hoisting Hooks, Hook Plates, or Booms. Available in swivel or rigid styles. Variety of capacities available. Forged steel construction.

MODEL NUMBER	DESCRIPTION	UNIFORM LIFTING CAPACITY	NET WT. (POUND)
HOOK-S-4	SWIVEL HOOK WITH CLEVIS	4,000 lb.	4
HOOK-S-6	SWIVEL HOOK WITH CLEVIS	6,000 lb.	5
HOOK-S-10	SWIVEL HOOK WITH CLEVIS	10,000 lb.	14
HOOK-R-4	RIGID GRAB HOOK WITH CLEVIS	4,000 lb.	3

Bag Lifter

The bag lifter is ideal for industrial and manufacturing settings. The unit is constructed of powder coated steel for durability and added strength. The lifter can be used with the center mounted hook point for balanced lifting capabilities with an overhead hoist or with a forklift by utilizing the attached fork pockets. After choosing which lifting style is best, secure the loops of the bag to the four strap points for safe maneuvering and transporting.

MODEL NUMBER	OVERALL SIZE (W x L x H)	UNIFORM CAPACITY	NET WT. (POUND)
BBL-4	40" x 40" x 13¾"	4,000 lb.	97



New



LED Pedestrian Warning System

Help reduce accidents with our LED Pedestrian Warning System. (4) 4¾" x 1" high powered yellow LED warning strobe lights can be mounted to a variety of industrial devices in any location for multi-directional visibility. Lights illuminate floor surface to warn pedestrians of traffic. Units are multi-voltage (12V DC - 48V DC) and each light comes with 4½ feet of cord. Warning system includes: lights with cords, voltage regulator, fuse holders, control unit, and on/off switch.

MODEL NUMBER	CORD LENGTH	LIGHT SIZE (W x H)	VOLTAGE	NET WT. (POUND)
LT-LIGHT-4Ⓢ	4½'	4¾" x 1"	12V DC / 48V DC	3

New



48 Hours
to Ship



Fork Leveler

Designed to aid the fork lift driver in determining when the forks are level. Unit reduces the risk of damaging or piercing product when removing it from pallet racking. Fasten the steel leveler to the mast of the fork lift. While tilting the forks to the desired angle, the fork leveler will tilt as well, showing that the forks are not currently in a horizontal position. When forks are moved back into a safe level angle, the leveler will be perfectly horizontally.

MODEL NUMBER	DESCRIPTION	OVERALL SIZE (W x L x H)	NET WT. (POUND)
FRK-LVL	FORK LEVELER	2¼" x 9¼" x 5"	1

New



Fork Truck Carriage Bumper

Protect loads from potential damage with our Fork Truck Carriage Bumper. Simply bolt to forklift class II carriage with included hardware.

MODEL NUMBER	DESCRIPTION	BUMPER SIZE (W x H)	NET WT. (POUND)
FCB-818Ⓢ	FORK TRUCK CARRIAGE BUMPER	8" x 18"	28


48 Hours
to Ship



Fork Truck Floor Scraper

Designed to turn your fork truck into a floor scraper. Works well in paint and finish rooms for removing over sprayed paint from floors. Simply slide fork into opening and attach safety restraint to carriage for safety. Features hardened scraping blade for long life and durability. Blade is mounted in pivot assembly to allow it to raise up with contact against a crack or rise in the floor. Heavy-duty welded steel construction. Painted finish.

MODEL NUMBER	BLADE WIDTH	OVERALL SIZE (W x L x H)	USABLE FORK OPENING (W x H)	NET WT. (POUND)
SCRAPE-1	12"	13" x 36" x 8"	9¼" x 3¼"	162

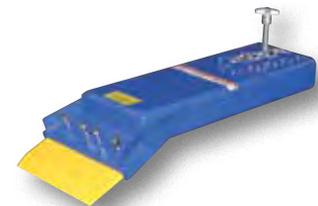

Fork Truck Mounted Brush Sweepers

Fork Truck Brush Sweepers are ideal for interior and exterior commercial sweeping. Great for cleanup applications; docks, warehouses, and parking lots. Lightweight aluminum body with polypropylene bristles. Red powder coat finish. Attach unit by sliding forks into pockets and securing with locking screws. Optional Dust Mop attaches to sweep fine material on polished floors.

MODEL NUMBER	OVERALL SIZE (W x D x H)	FORK POCKET (W x D x H)	SWEEPING WIDTH	BRISTLE LENGTH	NET WT. (POUND)
VSWP-48Ⓢ	48" x 9" x 12"	5" x 7¼" x 2"	48"	8"	43
VSWP-60Ⓢ	60" x 9" x 12"	5" x 7¼" x 2"	60"	8"	51
VSWP-48-RB	48" REPLACEMENT BRUSH KIT (5 ROWS TO A KIT)				18
VSWP-60-RB	60" REPLACEMENT BRUSH KIT (5 ROWS TO A KIT)				22
VSWP-60-DM	OPTIONAL DUST MOP ATTACHMENT				10





Hangings Magnetic Sweepers

Hangings Magnetic Sweepers are ideal for cleaning industrial settings, parking lots, and loading areas. The design is durable, yet lightweight, for easy maneuverability and portability from work area to work area. A release lever is located in the sweeper for simple, safe discarding of fragments. Constructed with heavy gauge steel and aluminum. Comes completely assembled.

Hangings Magnetic Sweepers, *Hang-Type* include eyebolts and chains for hanging units from a vehicle.


Hangings Magnetic Sweepers *with Fork Lift Hangers* can be suspended from a fork lift for smooth and efficient gathering of material, both large and small. Fork pockets measure 5"W x 1¼"H.




model MS-36



model HDMS-48

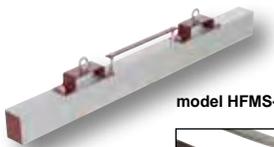

model HFMS-48

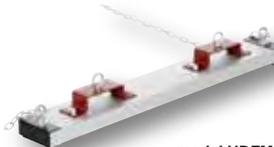

model HDFMS-36



Fork Lift Loading Attachment

The Dock-Pro™ can increase company productivity and reduce injury. The unit is easy to use, involves low maintenance, and comes with a 96" long conveyor and safety lock. It is adjustable to 30" below dock height and is adaptable to most fork lifts with custom designs available. The Dock-Pro™ is a fork lift attachment designed to help load and carry material from loading dock fork lift to pickup truck. It is designed to be safe, productive, and cost effective.

MODEL NUMBER	OVERALL SIZE (W x L x H)	FORK POCKET SIZE (W x L)	UNIFORM CAPACITY	NET WT. (POUND)
DP-3896-15	38½" x 141" x 40"	5½" x 2½"	1,500 lb.	755



Roller Forks

Mechanical forks designed to reduce costs through pallet-less handling. Ideal for FIBC bags, (large bulk sacks), slip-sheeted goods, and corrugated bundles as well as regular pallets. Use with standard lift truck forks providing greater operational versatility. The unique series of dual-roller cartridges allow the forks to place and retrieve heavy loads quickly and easily. See website for additional sizes.

MODEL NUMBER	OVERALL SIZE (W x L)	HEAL THICKNESS	MOUNTING CLASS	UNIFORM CAPACITY	NET WT. (POUND)
RF-40-42	8.25" x 43.3"	2.3"	II	4,000 lb.	326
RF-40-48	8.25" x 47.2"	2.3"	II	4,000 lb.	341



model FTLP-5454-HR



model FTLP-5454

Loading Platform for Fork Truck

Allows fork trucks to load/unload items into trucks and trailers. Usable platform size 54" x 54". Maximum uniform weight capacity is 2,000 pounds. (dependent on fork truck capacity). Includes 12" lip to help with transition. Side guard toeboards are 6" high. Fork truck fork pockets are 7½"W x 2½"H usable. Four tie-down rings are included for securing equipment (tie downs not included). Diamond plate floor for extra traction. Safety restraint is included to secure platform to fork truck. Steel construction with blue painted finish.



MODEL NUMBER	DESCRIPTION	NET WT. (POUND)
FTLP-5454	FORK TRUCK LOADING PLATFORM	337
FTLP-5454-HR*	FORK TRUCK LOADING PLATFORM W/OPTIONS*	407

*FEATURES HANDRAIL ON TWO SIDES, BACK MESH SCREEN, & CHAINS

Coil Rams/Lifters

The Coil Lifter is used to easily maneuver many types of coiled material. The Coil Lifters are available in both class II carriage mount and fork mount. To accommodate multiple core sizes and capacities, units can be ordered with either a 4½" or 5⅝" diameter ram pole. Sturdy steel construction and painted blue. Fork mounted units feature 7½"W x 2½"H (usable) fork pockets on 24" centers. Carriage mounted units are class II with a spring loaded lock pin to secure the unit to fork truck carriage.

MODEL NUMBER	LENGTH	POLE DIAMETER	CARRIAGE CLASS	UNIFORM CAPACITY	NET WT. (POUND)
FORK MOUNTED - INVERTED					
CCF-24-4	24"	4½"	N/A	3,000 lb.	258
CCF-36-4	36"	4½"	N/A	3,000 lb.	273
CCF-48-4	48"	4½"	N/A	3,000 lb.	288
CCF-60-4	60"	4½"	N/A	3,000 lb.	300
CCF-24-5	24"	5⅝"	N/A	5,500 lb.	267
CCF-36-5	36"	5⅝"	N/A	5,500 lb.	281
CCF-48-5	48"	5⅝"	N/A	5,500 lb.	306
CCF-60-5	60"	5⅝"	N/A	5,500 lb.	320
CARRIAGE MOUNTED - CLASS II					
CCM-24-4	24"	4½"	2	3,000 lb.	150
CCM-36-4	36"	4½"	2	3,000 lb.	160
CCM-48-4	48"	4½"	2	3,000 lb.	170
CCM-60-4	60"	4½"	2	3,000 lb.	180
CCM-24-5	24"	5⅝"	2	5,500 lb.	185
CCM-36-5	36"	5⅝"	2	5,500 lb.	200
CCM-48-5	48"	5⅝"	2	5,500 lb.	217
CCM-60-5	60"	5⅝"	2	5,500 lb.	232

Rug Rams/Carpet Poles

Transport rolls of carpet with our sturdy Rug Rams/Carpet Poles. Available in either carriage or fork mounted styles. 2¾" diameter high strength, rotatable, replaceable pole has tapered tip. All units are made of steel construction and painted blue.

Fork Mounted Rug Rams feature 7½" wide by 2½" high usable fork pockets on 24" centers. Safety restraint is included to secure unit to fork truck.


Carriage Mounted Rug Rams are available in class II or III and feature a spring loaded locking pin to secure them to the carriage.

MODEL NUMBER	POLE LENGTH	POLE DIAMETER	CARRIAGE CLASS	UNIFORM CAPACITY	NET WT. (POUND)
FORK MOUNTED - INVERTED					
CRP-108	108"	2¾"	N/A	2,500 lb.	466
CRP-120	120"	2¾"	N/A	2,200 lb.	488
CRP-144	144"	2¾"	N/A	1,800 lb.	528
FORK MOUNTED					
CRF-108	108"	2¾"	N/A	2,500 lb.	389
CRF-120	120"	2¾"	N/A	2,200 lb.	424
CRF-144	144"	2¾"	N/A	1,800 lb.	450
CARRIAGE MOUNTED - CLASS II					
CR-108-2	108"	2¾"	2	2,500 lb.	287
CR-120-2	120"	2¾"	2	2,200 lb.	310
CR-144-2	144"	2¾"	2	1,800 lb.	342
CARRIAGE MOUNTED - CLASS III					
CR-108-3	108"	2¾"	3	2,500 lb.	296
CR-120-3	120"	2¾"	3	2,200 lb.	316
CR-144-3	144"	2¾"	3	1,800 lb.	478

CUSTOM SIZES AVAILABLE



FORK MOUNTED - INVERTED
series CCF

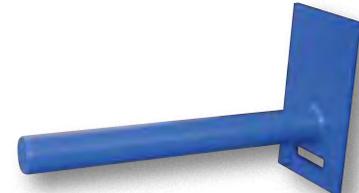

CARRIAGE MOUNTED
series CCM



FORK MOUNTED - INVERTED
series CRP



FORK MOUNTED
series CRF




CARRIAGE MOUNTED
series CR

Fork Rear Spacers

Insert the loop at the tip of the fork and slide it up at a 45° angle. Then, lay it down over the existing forks. Load pallets into the rear of trailer conveniently and easily. Practical for pushing pallets two or three deep into a trailer.

MODEL NUMBER	ACCOMMODATES FORK WIDTH	SPACER LENGTH	MAX. FORK THICKNESS	NET WT. PAIR (LB.)
FRS-4-12	4"	12"	2"	24
FRS-5-12	5"	12"	2"	30
FRS-6-12	6"	12"	2"	35





Fork Extensions

Provide the extra support needed to lift long or large objects with a fork truck. Welded steel construction with cast steel tips. Steel retaining strap (loop style) prevents fork extensions from sliding off forks during use. Powder coat yellow finish. OSHA regulations require that extensions are no more than 150% of the existing fork length. (e.g. 48" existing forks, the fork extension should not exceed 72"). Maximum uniform capacity is 4,000 pounds evenly distributed per pair.

48 Hours
to Ship



POWDER COATED TOUGH

Loop Style: Insert loop at the tip of the fork and slide it up at a 45° angle. Then, lay it down over the existing fork.

Pin Style (suffix P): Remove pin and lay extension over fork or drive fork truck into the extension. Re-insert the pin behind the heel of the fork to secure extension.

Rear Spacer (suffix RS): Insert the loop at the tip of the fork and slide it up at a 45° angle. Then, lay it down over the existing forks. Load pallets into rear of trailer conveniently and easily. Practical for pushing pallets two or three deep into a trailer. This option is factory installed and must be ordered with fork extensions.




MODEL NUMBER	ACCOMMODATES FORK WIDTH	FORK EXTENSION INSIDE WIDTH	LENGTH	MAXIMUM FORK THICKNESS	NET WT. PAIR (LB.)
FE-4-48	4"	4½"	48"	2"	74
FE-4-54	4"	4½"	54"	2"	84
FE-4-63	4"	4½"	63"	2"	98
FE-4-66	4"	4½"	66"	2"	100
FE-4-72	4"	4½"	72"	2"	114
FE-4-84	4"	4½"	84"	2"	154
FE-4-90	4"	4½"	90"	2"	166
FE-4-96	4"	4½"	96"	2"	172
FE-4-108-P	4"	4½"	108"	2"	193
FE-4-120-P	4"	4½"	120"	2"	220
FE-5-48	5"	5½"	48"	2"	86
FE-5-54	5"	5½"	54"	2"	96
FE-5-63	5"	5½"	63"	2"	110
FE-5-66	5"	5½"	66"	2"	116
FE-5-72	5"	5½"	72"	2"	128
FE-5-84	5"	5½"	84"	2"	184
FE-5-90	5"	5½"	90"	2"	179
FE-5-96	5"	5½"	96"	2"	214
FE-5-108-P	5"	5½"	108"	2"	215
FE-5-120-P	5"	5½"	120"	2"	225
FE-6-48	6"	6½"	48"	2½"	94
FE-6-54	6"	6½"	54"	2½"	104
FE-6-63	6"	6½"	63"	2½"	116
FE-6-66	6"	6½"	66"	2½"	128
FE-6-72	6"	6½"	72"	2½"	134
FE-6-84	6"	6½"	84"	2½"	186
FE-6-90	6"	6½"	90"	2½"	189
FE-6-96	6"	6½"	96"	2½"	218
FE-6-108-P	6"	6½"	108"	2½"	238
FE-6-120-P	6"	6½"	120"	2½"	255

SUFFIX "P" FEATURES A PIN LOCK

Round or Triangular Fork Extensions

Ideal for moving around large rolls of material. Available in round or triangular style. Powder coat yellow finish. To install, insert loop at the tip of the fork and slide it up at a 45° angle. Then, lay it down over the fork. OSHA regulations require that extensions do not exceed the length of the existing fork length by more than 150% (e.g. 48" existing forks, the fork extension should not exceed 72").

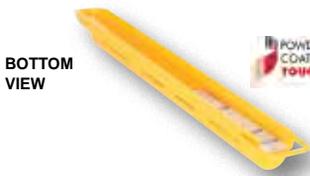

MODEL NUMBER	ACCOMMODATES FORK WIDTH	FORK EXTENSION INSIDE WIDTH	LENGTH	MAX. FORK THICKNESS	NET WT. PAIR (LB.)
ROUND EXTENSIONS					
FE-4-54-R	4"	4½"	54"	2"	128
FE-4-63-R	4"	4½"	63"	2"	148
FE-5-54-R	5"	5½"	54"	2"	96
FE-5-63-R	5"	5½"	63"	2"	110
TRIANGULAR EXTENSIONS					
FE-4-54-T	4"	4½"	54"	2"	84
FE-4-63-T	4"	4½"	63"	2"	98
FE-5-54-T	5"	5½"	54"	2"	98
FE-5-63-T	5"	5½"	63"	2"	110

Forklift Safety Fork Pads

Protect your employees with these Safety Fork Pads. These pads are designed to cover the sharp ends of the forklift forks (when not in use) with a durable polymer cushion, reducing the risk of head or leg injuries.

MODEL NUMBER	OVERALL DIMENSIONS (W x H x L)	INSIDE (FLEXIBLE) FORK OPENING (W x H)	COLOR	NET WT. PAIR (LB.)
STANDARD PADS				
SFP-O	7" x 2¾" x 9"	5½" x ¾"	ORANGE	14
SFP-Y	7" x 2¾" x 9"	5½" x ¾"	YELLOW	14
SFP-GN	7" x 2¾" x 9"	5½" x ¾"	GREEN	14
THIN PADS				
SFP-T-O	6¼" x 1½" x 7½"	5½" x ¾"	ORANGE	4
SFP-T-Y	6¼" x 1½" x 7½"	5½" x ¾"	YELLOW	4
SFP-T-GN	6¼" x 1½" x 7½"	5½" x ¾"	GREEN	4

New



48 Hours to Ship

BEFORE



AFTER

Polyethylene Fork Blade Protectors

Prevent damage to packages and skids from sharp edges of fork truck forks with blunt end Fork Blade Protectors. Hide unsightly scratches and gouges on your forks as well. Constructed from lightweight 100% polyethylene material. Simply slide over forks. Held in place with steel cable.

MODEL NUMBER	ACCOMMODATES FORK WIDTH	WIDTH	LENGTH	MAXIMUM FORK THICKNESS	NET WT. PAIR (LB.)
VFP-42	4"	4¼"	41½"	1¾"	3
VFP-48	4"	4¼"	47½"	1¾"	3

Fork Extension Storage Rack

48 Hours to Ship

Install or remove fork extensions without lifting, pushing, or getting off the fork truck. Easy to use: A) Drive in so tips of forks are over elevated bar. B) Lower forks until they nest in channel in base of rack. C) Back fork truck out of fork restraining straps. Fork extensions not included.

MODEL NUMBER	OVERALL SIZE (W x D x H)	MINIMUM FORK EXTENSION LENGTH	NET WT. (POUND)
FORK-R-54	40" x 46" x 54"	60"	165



Fork Truck Fork Caddy

Transport fork truck forks easily and safely. This caddy allows the user to easily remove and install forks onto a fork truck. This is usually a dangerous and time consuming process, but our fork caddy makes this a breeze.

After transporting the fork to the fork truck, rotate the handle 90°. Slide the fork onto the mast. The Fork Caddy has easy-grip handles and rolls smoothly on two swivel casters. A locking screw secures the fork into the caddy to keep it in place while transporting. The comfort-grip handle pivots up to 180° to allow for easier mobility. The Fork Caddy is lightweight and small enough for easy storage as well.

MODEL NUMBER	USABLE SIZE (W x H)	CASTERS	UNIFORM CAPACITY	NET WT. (POUND)
FC-29	6½" x 29⅞"	3" x 1" SWIVEL	2,000 lb.	31



48 Hours to Ship



POWDER COATED TOUGH

Forged Steel Forks

Change your current fork length or buy an extra pair of forks for an emergency with our Forged Steel Forks. Forks are 4" wide each. Designed for class II carriage mounting and includes lock pin. Meets I.T.A. standards.

MODEL NUMBER	LENGTH (INCHES)	THICKNESS (INCHES)	UNIFORM CAPACITY	NET WT. PAIR (LB.)
F4-1.25-36	36	1¼	3,000 lb.	201
F4-1.25-48	48	1¼	3,000 lb.	205
F4-1.50-36	36	1½	4,000 lb.	210
F4-1.50-42	42	1½	4,000 lb.	249
F4-1.50-48	48	1½	4,000 lb.	277
F4-1.50-60	60	1½	4,000 lb.	328
F4-1.75-36	36	1¾	5,000 lb.	251
F4-1.75-42	42	1¾	5,000 lb.	277
F4-1.75-48	48	1¾	5,000 lb.	309
F4-1.75-60	60	1¾	5,000 lb.	344





model T-HOP
shown with D-200-LD




48 Hours
to Ship

model FM-T-DUMP



ADJUSTABLE
HOOKS

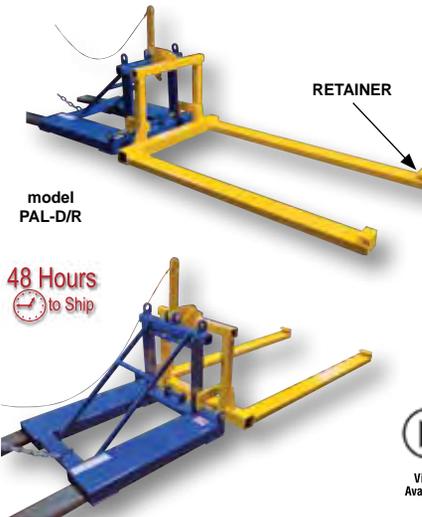

model
PAL-D/R

48 Hours
to Ship



Battery Powered Trash Can Dumper and Container

12V DC POWER STANDARD

One person with a fork truck can safely and easily dump drums into a hopper. DC powered operation with on-board battery charger. Raise time is 10 seconds and lowered time is 8 seconds. Dump height is 55". A 2 cubic yard Vestil "D" style hopper is available separately to collect trash. Custom configurations can be made for most trash containers.

MODEL NUMBER	DESCRIPTION	OVERALL SIZE (W x L x H)	UNIFORM CAPACITY	NET WT. (POUND)
T-HOP	DUMPER	37" x 103½" x 60"	400 lb.	732
D-200-LD	HOPPER	69" x 56" x 52"	2,000 lb.	572

Fork Truck Mounted Trash Can Dumper

Save time and reduce work-related injuries caused by lifting and dumping heavy waste containers. This innovative product will allow a fork truck driver to lift and dump refuse containers weighing up to 1,000 pounds without ever leaving the seat of the fork truck! Secure dumper to fork truck with safety chain and run cable to driver's seat. Align trash can with dumper and lock into place. Once locked in place, transport trash can to refuse container, align, and pull chain to dump refuse container contents. Only for use with 64 gallon trash can, series TH-64 or approved equal. Fork pockets are 2⅝" high by 7⅞" wide usable. Steel construction for years of dependable use.

MODEL NUMBER	DESCRIPTION	OVERALL SIZE (W x L x H)	UNIFORM CAPACITY	NET WT. (POUND)
FM-T-DUMP	DUMPER	40⅝" x 39⅞" x 42"	1,000 lb.	254

MODEL NUMBER	VOLUME (GALLONS)	COLOR	OVERALL SIZE (W x D x H)	NET WT. (POUND)
TRASH CAN				
TH-64-GRN	64	GREEN	23½" x 29¼" x 39¾"	29
TH-64-GY	64	GRAY	23½" x 29¼" x 39¾"	29
TH-64-BLU	64	BLUE	23½" x 29¼" x 39¾"	29

Trash Can Dumper

Lift, carry, and dump trash cans without leaving the seat of your fork truck. Simple design does not have any moving parts. Includes sloped guides to center container as it rotates. Pick-up hooks adjust from 12" to 16". Fork pockets measure 4¾" wide x 2" high on 31¾" centers. Welded steel construction is powder coated blue. Additional trash cans available.

MODEL NUMBER	DESCRIPTION	OVERALL SIZE (W x L x H)	UNIFORM CAPACITY	NET WT. (POUND)
TCD-FM-E	DUMPER	36½" x 58½" x 7½"	500 lb.	158

MODEL NUMBER	VOLUME (GALLONS)	COLOR	OVERALL SIZE (W x D x H)	NET WT. (POUND)
TRASH CAN				
TH-64-GRN	64	GREEN	23½" x 29¼" x 39¾"	29
TH-64-GY	64	GRAY	23½" x 29¼" x 39¾"	29
TH-64-BLU	64	BLUE	23½" x 29¼" x 39¾"	29


Pallet Dumper/Retainer

Dump loaded pallets easily without leaving the seat of your fork truck with the all welded steel Pallet Dumper/Retainer. Unit slides onto forks and is secured by a safety restraint. Two retainers hold the pallet in place while dumping the contents into a hopper or dumpster. Once the retainers have cleared the opposite end of the pallet, raise the forks and the retainers will hold the pallet on the forks. Lift the pallet to the dumping height and rest the pallet on the edge of the dumpster. Pull the chain, releasing the fork carriage, allowing the pallet to tilt, and dump the load into the hopper or dumpster. When finished, simply lower to the ground until the carriage latches.

MODEL NUMBER	FORK POCKETS (W x H)	FORK LENGTH	OVERALL WIDTH	UNIFORM CAPACITY	NET WT. (POUND)
PAL-D/R	7½" x 2½"	52"	33"	2,000 lb.	300

Fork Truck Snow Plow

Unique design attaches to fork truck forks. Pass through fork tubes keep weight back towards fork truck mast. Locking pins secure snow plow to forks for safety. Manual pivot mechanism for angled plowing on both sides. Floating pads allow for adjustment of plowing height. Adjustable springs allow blade to pivot back for safety. Steel construction with powder coat finish.

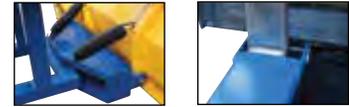

MODEL NUMBER	DESCRIPTION	NET WT. (POUND)
SPB-N-72	FORK TRUCK SNOW PLOW WITH 72" WIDE BLADE	619
SPB-N-WT	OPTIONAL WEIGHT FOR BETTER PLOWING PERFORMANCE	45

Fork Mounted Snow Plow Blades

Designed for use with your fork truck, these Snow Plow Blades are multifunctional to work with your existing equipment. No more waiting for daytime snow removal. Simply place the snow blade onto your fork truck and away you go! Installation is as easy as sliding the forks into the fork pockets and securing them to the fork carriage. Prevent damage from obstacles and uneven surfaces with trip springs. Easy angling and backgrade capabilities for optimal performance. Constructed of 5/16" rollplate with steel ribs on back. The blade edge is 5/8" x 6" hardened steel. Optional counterbalance shipped empty.




MODEL NUMBER	OVERALL PLOW WIDTH	PLOW WIDTH AT 24° ANGLE	PLOW WIDTH AT 47° ANGLE	MAXIMUM FORK WIDTH x LENGTH	NET WT. (POUND)
SPB-548	6 FEET	66"	48"	5½" x 48"	585
SPB-748	6 FEET	66"	48"	7½" x 48"	605
SPB-556	7 FEET	76"	56"	5½" x 48"	645
SPB-756	7 FEET	76"	56"	7½" x 48"	650
SPB-CB	COUNTERBALANCE (estimated weight filled 500 lb.)				50



Fork Mounted Front Loader

The Front Loader is engineered for use with your existing fork truck. "Dust Pan" design is ideal for transporting snow, gravel, sand, or refuse. Pull release cable to dump contents of scoop. Attaches quickly and easily to most fork trucks. Beveled front edge for better scooping ability. The usable fork pockets measure 7½" wide by 2½" high on 24" centers. All welded steel construction with durable powder coat finish.

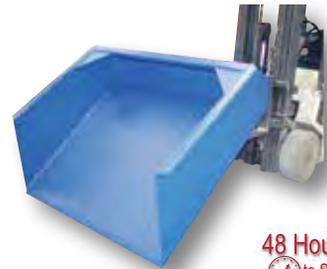

48 Hours to Ship

MODEL NUMBER	OVERALL SIZE (W x D x H)	UNIFORM CAPACITY	DUMP ANGLE	CUBIC YD. CAPACITY	NET WT. (POUND)
FL-4000-N	48½" x 62⅝" x 21¼"	4,000 lb.	90°	1	561
FL-4000	69¼" x 62⅝" x 21¼"	4,000 lb.	90°	1⅓	561
FL-LEKP	WELDED LEAK PROOF OPTION				0



Material Spreaders

Tough thermoplastic hopper spreads material up to 25 feet wide (fixed). Hitch mount standard.

SPREAD-2 is a multi-purpose spreader with a welded steel material auger for free flowing material; rock salt. Includes a 2" receiver tube. 12 volt DC motor.

SPREAD-3 is an accurate flow spreader with precision material gate system for free flowing fine material; ice melters, fertilizers, seed, insecticides, and pellets. Includes 2" receiver, complete wiring, and on/off switch. 12 volt DC motor. 10" steel spinner with steel spring agitator. Adjustable metering gate with positive stop for quick return to original calibration setting.

MODEL NUMBER	SPREADING WIDTH	OVERALL SIZE (W x D x H)	UNIFORM CUBIC FT. CAPACITY	UNIFORM CAPACITY	NET WT. (POUND)
SPREAD-2	25'	30½" x 21" x 29"	2.7	180 lb.	68
SPREAD-3	25'	30½" x 21" x 29"	2.7	180 lb.	65



model SPREAD-2

HOOK-BASE Models may be used to attach material spreaders to your fork truck!

MODEL NUMBER	FORK POCKETS (W x H)	FORK LENGTH	LENGTH TO CENTER OF BALL	UNIFORM CAPACITY	NET WT. (POUND)
HOOK-BASE-32	5" x 2"	36"	32"	4,000 lb.	139
HOOK-BASE-38	5" x 2"	42"	38"	4,000 lb.	162
HOOK-BASE-44	5" x 2"	48"	44"	4,000 lb.	166



model SPREAD-2 shown on the HOOK-BASE attachment



SINGLE SIDE DOOR ENTRY
series WP



48 Hours
to Ship



DUAL SIDE DOOR ENTRY
16" Wide Doors
series WP-DD



PIN STYLE TINE LOCK IS STANDARD

48 Hours
to Ship



Work Platforms

Convenient fork truck work platforms quickly and safely raise maintenance personnel where they are needed. Attaches to fork truck by inserting forks into fork pockets and securing platform to fork truck. Tine lock must be engaged to secure platform to forks. 42" high handrail with 21" high mid-rail on three sides. 60" high expanded metal backing on fourth side (84" high backing to meet California OSHA specifications on models with suffix -84B). Includes diamond plate platform and 36" long strap with hook to attach platform to fork truck. The usable fork pockets are 7¾"W x 3⅞"H in rear and 7¾"W x 1⅞"H in front. A maximum of two people can be in the work platform at one time. Uniform weight capacity is 1,000 lb. evenly distributed. Welded steel construction. Powder coat finish. The Full Featured units include an Emergency Stop Button Kit and Web Lanyard with Safety Harness.

MODEL NUMBER	PLATFORM SIZE (W x L)	FORK POCKET CENTERS	EXPANDED METAL BACK HEIGHT	NET WT. (POUND)
SINGLE SIDE DOOR ENTRY				
WP-3636	36" x 36"	16"	60"	146
WP-3648	36" x 48"	16"	60"	165
WP-4848	48" x 48"	24"	60"	195
WP-4848-FF (FULL FEATURED)	48" x 48"	24"	60"	208
WP-3636-84B	36" x 36"	16"	84"	151
WP-3648-84B	36" x 48"	16"	84"	175
WP-4848-84B	48" x 48"	24"	84"	205
WP-4848-84B-FF (FULL FEATURED)	48" x 48"	24"	84"	218
DUAL SIDE DOOR ENTRY				
WP-3636-DD	36" x 36"	16"	60"	143
WP-3648-DD	36" x 48"	16"	60"	175
WP-4848-DD	48" x 48"	24"	60"	207
WP-4848-DD-FF (FULL FEATURED)	48" x 48"	24"	60"	220
WP-3636-84B-DD	36" x 36"	16"	84"	215
WP-3648-84B-DD	36" x 48"	16"	84"	183
WP-4848-84B-DD	48" x 48"	24"	84"	213
WP-4848-84B-DD-FF (FULL FEATURED)	48" x 48"	24"	84"	226

SEE THE FOLLOWING PAGE FOR OPTIONS

Stockpicker Work Platform

Elevate personnel and pallets to overhead racks and shelving for safe and convenient access. Accommodates one person and a 42" long pallet. Attaches to fork truck by inserting forks into fork pockets and securing platform to fork truck. Pin style tine lock standard. 42" high handrail with 21" high mid-rail on two sides. 60" high expanded metal backing on fourth side (84" high backing to meet California OSHA specifications). Includes diamond floor plate platform and 36" long chain with hook to attach platform to fork truck. Usable fork pocket size is 7½"W x 2½"H. Welded steel construction. Powder coat finish.

MODEL NUMBER	PLATFORM SIZE (W x L)	FORK POCKET CENTER	EXPANDED METAL BACK	UNIFORM CAPACITY	NET WT. (POUND)
SP-175	30" x 20"	22¼"	60"	4,000 lb.	174
SP-175-84B	30" x 20"	22¼"	84"	4,000 lb.	190

SEE THE FOLLOWING PAGE FOR OPTIONS



Multi-Person Work Platforms

Multi-Person Work Platforms quickly and safely raise maintenance personnel where they are needed. Larger platform accommodates various applications. The work platform attaches to the fork truck by inserting the forks into the fork pockets and securing the platform to the fork truck. This Work Platform is made of square tube construction. Base and side curbs are formed from one piece of heavy gauge sheet for extra strength. Deck has slip resistant surface and fork pocket openings. Units feature safety pins behind each fork and heavy duty chains welded to the back frame of the platform which secure around the fork carriage. Hinged gate on the front of the unit has a pin safety lock built in. Painted safety yellow.



MODEL NUMBER	PLATFORM SIZE (W x L)	UNIFORM CAPACITY	FORK POCKET CENTERS	EXPANDED METAL BACK	NET WT. (POUND)
WP-4072	40" x 72"	1,200 lb.	29"	63"	406
WP-4096	40" x 96"	1,500 lb.	29"	63"	470
WP-40120	40" x 120"	1,800 lb.	29"	63"	540

Fold Down Work Platform

Elevate personnel to overhead racks and shelving for safe and convenient access. When not in use, unit can be folded down and moved out of the way by just one person. Unit stores conveniently in a 4" deep bottom base, with a folded height of 11½". Handrail is 38" high with 23½" high mid-rail on three sides. 70" high expanded metal backing on fourth side (84" high backing to meet California OSHA specifications on models with suffix -84B). Includes diamond plate platform, tine lock, and a safety restraint to attach platform to fork truck. Usable fork pockets measure 7⅞"W x 3⅜"H on 27¾" centers. The overall size of the unit is 38"W x 38"L x 81½"H. Folded size is 38"W x 38"L x 11½"H. Powder coat yellow finish. Steel construction.

MODEL NUMBER	PLATFORM SIZE (W x L)	FORK POCKET CENTER	EXPANDED METAL BACK	UNIFORM CAPACITY	NET WT. (POUND)
WP-3737-FD [Ⓢ]	37" x 37"	27¾"	60"	600 lb.	227
WP-3737-FD-84B [Ⓢ]	37" x 37"	27¾"	84"	600 lb.	245

OPTIONAL 4" x 2" CASTERS (TWO RIGID & TWO SWIVEL), model WP-CAFD



Work Platform Options



4" x 1¼" Poly Casters, model WP-CA, allows you to move unit without the use of a fork truck.



Emergency Stop Button Kit, model WP-SB, allows the operator to shut off fork truck power from the work platform. Works with both gas and electric fork trucks.



Fluorescent Tube Caddy, model WP-TC, holds fluorescent light bulbs and other maintenance equipment.



Sliding Tool Tray, series WP-TT, available in 36" or 48" wide. Holds maintenance tools.



Web Lanyard with Safety Harness, series WP-LH, protects worker in the event of a fall.

WORK PLATFORM OPTIONS		
MODEL NUMBER	DESCRIPTION	NET WT. (POUND)
WP-CA [Ⓢ]	(4) 4" x 1¼" POLY CASTERS (INCLUDES FOUR)	9
WP-SB [Ⓢ]	EMERGENCY STOP BUTTON KIT	8
WP-SB-FTJB	EMERGENCY STOP FORK TRUCK JUNCTION BOX ONLY	3
WP-SB-WPJB	EMERGENCY STOP WORK PLATFORM JUNCTION BOX ONLY	6
WP-TC [Ⓢ]	STEEL FLUORESCENT TUBE CADDY	30
WP-P-TC	POLYETHYLENE FLUORESCENT TUBE CADDY	9
WP-TT36 [Ⓢ]	SLIDING TOOL TRAY (FOR 36"W WORK PLATFORM)	13
WP-TT48 [Ⓢ]	SLIDING TOOL TRAY (FOR 48"W WORK PLATFORM)	22
WP-FD-TT	OPTIONAL TOOL TRAY FOR FOLD-DOWN WORK PLATFORM	21
WP-AFR*	AUTOMATIC FOLD DOWN RAMP (16" LONG WITH 16° INCLINE)	276
WP-WS [Ⓢ]	ADDITIONAL CAUTION SIGNS WITH MOUNTING HARDWARE	3
WP-DL	DOUBLE CHAIN DOOR LOCK	2


*WP-AFR IS NOT COMPATIBLE WITH THE WP-CA CASTER OPTION

LANYARD WITH SAFETY HARNESS						
MODEL NUMBER	DESCRIPTION	SIZE	WAIST SIZE	CAPACITY (POUND)	LENGTH OF LANYARD	NET WT. (POUND)
WP-LH-S [Ⓢ]	HARNESS	SMALL	SEE BELOW	350	6 FEET	5
WP-LH-M [Ⓢ]	HARNESS	MEDIUM	SEE BELOW	350	6 FEET	5
WP-LH-L [Ⓢ]	HARNESS	LARGE	SEE BELOW	350	6 FEET	5
WP-LH-XL [Ⓢ]	HARNESS	X-LARGE	SEE BELOW	350	6 FEET	5
WP-LH-XXL [Ⓢ]	HARNESS	XX-LARGE	SEE BELOW	350	6 FEET	5
WP-LH-XXXL [Ⓢ]	HARNESS	XXX-LARGE	SEE BELOW	350	6 FEET	7

HARNESS SIZING CHART						
HEIGHT	CHEST SIZE					
	34" - 36"	38" - 40"	42" - 44"	46" - 48"	50" - 54"	56" - 60"
SMALL (5'4" to 5'7")	SMALL	SMALL	MEDIUM	LARGE	X-LARGE	XX-LARGE
REGULAR (5'8" to 5'11")	SMALL	MEDIUM	LARGE	X-LARGE	XX-LARGE	XXX-LARGE
TALL (6'0" to 6'3")	MEDIUM	MEDIUM	LARGE	X-LARGE	XX-LARGE	XXX-LARGE
EXTRA TALL (6'3" PLUS)	LARGE	LARGE	X-LARGE	X-LARGE	XX-LARGE	XXX-LARGE




Poly Tube Caddy, series WP-P-TC, will not rust, scratch, or dent.

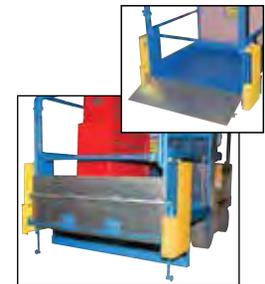

Automatic Fold Down Ramp, series WP-AFR, allows you to roll tool boxes on and off the Work Platform. Ramp automatically rises when the unit is lifted off the ground and lowers when work platform is lowered. Option comes standard with a front chain gate. (This option is not compatible with the WP-CA caster option.)



FULL 90°
DUMP ANGLE

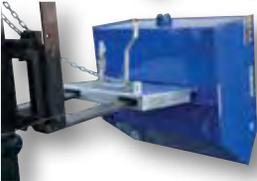

Height from the Front Lip to the Floor on "H" series Hoppers

H-25.....	14"
H-50.....	21"
H-100.....	21"
H-150.....	30 3/4"




Low Profile 90° Self-Dumping Steel Hoppers

Units feature a full 90° dump angle with a cushioned rubber bumper stop. The low profile design is essential for convenient loading. Dumping with a fork truck is quick and simple. A cable is pulled from the seat of the fork truck to dump the hopper. The unit returns to an upright and locked position when lowered to the ground. A safety restraint is provided to secure the hopper to the fork truck. 22" L usable fork pockets measure 7" W x 2" H. Formed base thickness is 1/4". Powder coat blue finish. **Must be attached to fork truck when dumping.** Options on page E13 & E14.

MODEL NUMBER	VOLUME CUBIC YARDS	UNIFORM CAPACITY	OVERALL SIZE (W x D x H)	FORK POCKET CENTERS	NET WT. (POUND)
LIGHT DUTY • 12 GAUGE STEEL					
H-25-LD	1/4	2,000 lb.	24" x 47" x 18"	11 5/8"	164
H-50-LD	1/2	2,000 lb.	24" x 47" x 28"	11 5/8"	205
H-100-LD	1	2,000 lb.	48" x 52" x 28"	21 5/8"	325
H-150-LD	1 1/2	2,000 lb.	49" x 52" x 28"	21 5/8"	363
MEDIUM DUTY • 10 GAUGE STEEL					
H-25-MD	1/4	4,000 lb.	24" x 47" x 18"	11 5/8"	207
H-50-MD	1/2	4,000 lb.	24" x 47" x 28"	11 5/8"	258
H-100-MD	1	4,000 lb.	48" x 52" x 28"	21 5/8"	362
H-150-MD	1 1/2	4,000 lb.	49" x 52" x 28"	21 5/8"	448
HEAVY DUTY • 8 GAUGE STEEL					
H-25-HD	1/4	6,000 lb.	24" x 47" x 18"	11 5/8"	207
H-50-HD	1/2	6,000 lb.	24" x 47" x 28"	11 5/8"	269
H-100-HD	1	6,000 lb.	48" x 52" x 28"	21 5/8"	392
H-150-HD	1 1/2	6,000 lb.	49" x 52" x 28"	21 5/8"	467

Self-Dumping Steel Hoppers with Bumper Release

Hopper automatically dumps when bumper release contacts the side of the dumpster. Hopper returns to an upright and locked position automatically after it dumps. Also includes a cable that may be operated from the seat of the fork truck to manually dump the hopper. A safety restraint is provided to secure the hopper to the fork truck. Usable fork pockets are 7 1/2" W x 2 1/2" H. Optional leak proof design sold separately, see page E15. D-33, D-50, D-75, and D-100 are stackable if you stack the top hopper turned 90° from the bottom. Powder coat blue finish. **Must be attached to fork truck when dumping.** Options on page E13 & E14.

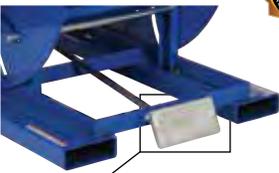

BUMPER RELEASE



Extra Large Self-Dumping Steel Hoppers available on page E13

MODEL NUMBER	VOLUME CUBIC YDS.	USABLE CHUTE SIZE (W x D* x H)	OVERALL SIZE (W x D x H)	FORK POCKET CENTERS	NET WT. (POUND)
LIGHT DUTY • 12 GAUGE STEEL • 2,000 LB. UNIFORM CAPACITY					
D-25-LD	1/4	20" x 41 1/4" x 27 7/8"	26" x 51" x 39"	18"	344
D-33-LD	1/3	20" x 41 1/4" x 27 7/8"	26" x 51" x 39"	18"	352
D-50-LD	1/2	30" x 41 1/4" x 27 7/8"	34" x 51" x 39"	18"	363
D-75-LD	3/4	28 1/4" x 54 1/2" x 32 1/2"	31" x 61" x 43"	18"	434
D-100-LD	1	38" x 54 1/4" x 32 1/2"	42" x 61" x 43"	18"	460
D-150-LD	1 1/2	40" x 63 3/4" x 41 1/2"	43" x 69" x 53"	28"	513
D-200-LD	2	53" x 63 3/4" x 41 1/2"	69" x 56" x 52"	28"	572
D-250-LD	2 1/2	66 1/4" x 63 3/4" x 41 1/2"	69" x 69" x 52"	28"	830
D-300-LD	3	78 3/16" x 63 3/4" x 41 1/2"	82" x 69" x 52"	28"	898
MEDIUM DUTY • 10 GAUGE STEEL • 4,000 LB. UNIFORM CAPACITY					
D-25-MD	1/4	20" x 41 1/4" x 27 7/8"	26" x 51" x 39"	18"	353
D-33-MD	1/3	20" x 41 1/4" x 27 7/8"	26" x 51" x 39"	18"	360
D-50-MD	1/2	30" x 41 1/4" x 27 7/8"	34" x 51" x 39"	18"	415
D-75-MD	3/4	28 1/4" x 54 1/2" x 32 1/2"	31" x 61" x 43"	18"	531
D-100-MD	1	38" x 54 1/4" x 32 1/2"	42" x 61" x 43"	18"	553
D-150-MD	1 1/2	40" x 63 3/4" x 41 1/2"	43" x 69" x 53"	28"	662
D-200-MD	2	53" x 63 3/4" x 41 1/2"	69" x 56" x 52"	28"	655
D-250-MD	2 1/2	66 1/4" x 63 3/4" x 41 1/2"	69" x 69" x 52"	28"	844
D-300-MD	3	78 3/16" x 63 3/4" x 41 1/2"	82" x 69" x 52"	28"	898
HEAVY DUTY • 8 GAUGE STEEL • 6,000 LB. UNIFORM CAPACITY					
D-25-HD	1/4	20" x 41 1/4" x 27 7/8"	26" x 51" x 39"	18"	362
D-33-HD	1/3	20" x 41 1/4" x 27 7/8"	26" x 51" x 39"	18"	368
D-50-HD	1/2	30" x 41 1/4" x 27 7/8"	34" x 51" x 39"	18"	415
D-75-HD	3/4	28 1/4" x 54 1/2" x 32 1/2"	31" x 61" x 43"	18"	531
D-100-HD	1	38" x 54 1/4" x 32 1/2"	42" x 61" x 43"	18"	563
D-150-HD	1 1/2	40" x 63 3/4" x 41 1/2"	43" x 69" x 53"	28"	662
D-200-HD	2	53" x 63 3/4" x 41 1/2"	69" x 56" x 52"	28"	731
D-250-HD	2 1/2	66 1/4" x 63 3/4" x 41 1/2"	69" x 69" x 52"	28"	844
D-300-HD	3	78 3/16" x 63 3/4" x 41 1/2"	82" x 69" x 52"	28"	898

* DEPTH DIMENSION IS MEASURED AT TOP OF CHUTE

Extra Large Self-Dumping Steel Hoppers


Extra Large Self-Dumping Steel Hoppers are ideal for the toughest environments. Hoppers are constructed of 8 gauge steel with a blue painted finish. Uniform capacity is 6,000 pounds. Usable fork pockets are 7½"W x 2½"H on 28" centers. Features include; a front bumper release, an automatic return to the upright position, full length fork tubes for easy portability, a safety restraint for secure transporting while on fork lift, and a manual pull cable for dumping from the driving position. **Must be attached to fork truck when dumping.**



New

MODEL NUMBER	VOLUME CUBIC YDS.	USABLE CHUTE (W x D* x H)	OVERALL SIZE (W x D x H)	NET WT. (POUND)
D-350-HD	3½	61" x 68" x 51½"	64" x 79" x 65"	1110
D-400-HD	4	69¾" x 68" x 51½"	73" x 79" x 65"	1254
D-500-HD	5	86¾" x 68" x 51½"	90" x 79" x 65"	1436

*DEPTH DIMENSION IS MEASURED AT TOP OF CHUTE




PADLOCK NOT INCLUDED

Heavy-Duty Poly Lids

Keep the contents of hoppers out of sight for a cleaner appearance with our Poly Lids. Constructed from heavy-duty virgin polyethylene material, these lids are lightweight and easy to open. The top of the lid includes a crown for water drainage and a ribbed design for strength and aesthetics. Ideal for schools, hospitals, and warehouses. Factory installed when ordered with hopper. May also be easily field installed. Standard color is black.

48 Hours to Ship

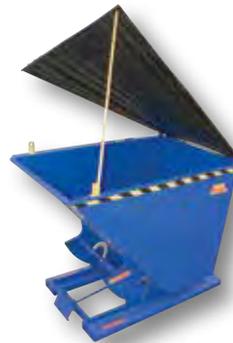

series PLID-D



series PLID-H (shown with optional caster kit)

MODEL NUMBER	USE WITH SIZE HOPPER	USE WITH STYLE	NUMBER OF PIECES	NET WT. (POUND)
PLID-H-25Ⓢ	1/4	H	1	56
PLID-H-50Ⓢ*	1/2	H	1	57
PLID-H-100Ⓢ*	1	H	2	56
PLID-H-150Ⓢ*	1½	H	2	61
PLID-D-25Ⓢ	1/4	D	1	56
PLID-D-33Ⓢ	1/3	D	1	57
PLID-D-50Ⓢ	1/2	D	1	57
PLID-D-75Ⓢ	3/4	D	1	58
PLID-D-100Ⓢ	1	D	1	57
PLID-D-150Ⓢ	1½	D	1	58
PLID-D-200Ⓢ	2	D	2	59
PLID-D-250Ⓢ	2½	D	2	59
PLID-D-300Ⓢ	3	D	2	61

*WORKS WITH PORTABLE HOPPERS


SPECIFY COLOR BY ADDING THE SUFFIX TO THE ABOVE PART NUMBER; RED suffix RD; BLUE suffix BU; YELLOW suffix YL; STANDARD COLOR IS BLACK



model PLID-D-100-RD




model PLID-D-100-BU




model PLID-D-100-YL


HOPPER LID OPTIONS
Contact factory for more details



FRONT-LOAD CONTAINER



REAR-LOAD CONTAINER



SIDE-LOAD CONTAINER

Specialty Colors for Self-Dumping Hoppers

Identify your hopper quickly and easily with our universal color codes. Contact factory for pricing.

MODEL NUMBER	COLOR	SUGGESTED USE
SPO-PC-SR	RED	HAZARD
SPO-PC-WT	WHITE	PAPER
SPO-PC-GY-SG	GREY	METAL
SPO-PC-GRN-T	GREEN	ORGANIC
SPO-PC-BL	BLUE	PLASTIC
SPO-PC-YEL	YELLOW	GLASS
SPO-PC-ORG-C	ORANGE	HIGH VISIBILITY
SPO-PC-BLK-HG	BLACK (NOT PICTURED)	UNIVERSAL/GENERAL
SFO-HD-GALV	HOT DIP GALVANIZED	WET ENVIRONMENT





MOLD-ON-RUBBER

SEMI-STEEL

48 Hours
to Ship



GLASS FILLED NYLON

POLY-ON-STEEL

Casters for Self-Dumping Hoppers

Transport loads with portable hoppers. When casters are ordered with hopper, quick-install caster pads are factory-welded to the base of the hopper. The casters are then shipped uninstalled to prevent freight damage. Casters not ordered with the hopper will need to have a caster pad welded in place by the customer. The ¼ and ½ cubic yard "H" series hoppers only include three casters - two rigid and one swivel. The maximum weight capacity is the lowest weight capacity of either the hopper or the casters. Weight of hopper must be considered when calculating usable capacity.

MODEL NUMBER	CASTER SIZE	UNIFORM CAPACITY	CASTER DESCRIPTION	QTY. PER ORDER	NET WT. (POUND)
HOP-SC6-2	6" x 2"	4,800 lb.	SEMI-STEEL	4	28
HOP-SC8-2	8" x 2"	4,800 lb.	SEMI-STEEL	4	27
HOP-RC6-2	6" x 2"	2,400 lb.	MOLD-ON-RUBBER	4	27
HOP-RC8-2	8" x 2"	2,400 lb.	MOLD-ON-RUBBER	4	36
HOP-PC6-2	6" x 2"	4,800 lb.	POLY-ON-STEEL	4	34
HOP-PC8-2	8" x 2"	4,800 lb.	POLY-ON-STEEL	4	40
HOP-PHC6-2	6" x 2"	4,800 lb.	GLASS FILLED NYLON	4	33
HOP-PHC8-2	8" x 2"	4,800 lb.	GLASS FILLED NYLON	4	33
HOP-SC6-2HD	6" x 2"	6,000 lb.	STEEL	4	40

WEIGHT OF HOPPER MUST BE CONSIDERED WHEN CALCULATING USABLE CAPACITY



DRAIN PLUG

Options for "H" Style Hoppers

Model H-DAMP, features a pressure compensated flow control to reduce the speed of the chute when the release lever is pulled. Does not allow you to stop at any point along the dump cycle.

MODEL NUMBER	DESCRIPTION	NET WT. (POUND)
H-DAMP-4	MORE CONTROLLED DUMPING PROCESS (4,000 LB. UNITS)	30
H-DAMP-6	MORE CONTROLLED DUMPING PROCESS (6,000 LB. UNITS)	40
LEKP	WELDED LEAK PROOF OPTION FOR "H" STYLE HOPPER	5
H-DPLG-1	1" THREADED DRAIN PLUG, LOCATED IN LEFT CORNER	2
H-DPLG-2	2" THREADED DRAIN PLUG, LOCATED IN LEFT CORNER	2
LUG	(4) LIFTING LUGS (WELDED) ONE ON EACH CORNER	150



model D-TILT

Options for "D" Style Hoppers

Sideways Tilt Option, model D-TILT, can be used with D-75-LD and D-100-LD hoppers only. User must obtain written permission from fork truck manufacturer prior to use. Factory or field installed. May still use hopper like normal. Adds 3½" to height.

MODEL NUMBER	DESCRIPTION	NET WT. (POUND)
D-TILT	SIDEWAYS TILT OPTION	130
LEKP	WELDED LEAK PROOF OPTION FOR "D" STYLE HOPPER	5
D-DPLG-1	1" THREADED DRAIN PLUG, LOCATED IN LEFT CORNER	2
D-DPLG-2	2" THREADED DRAIN PLUG, LOCATED IN LEFT CORNER	2
LUG	(4) LIFTING LUGS (WELDED) ONE ON EACH CORNER	150

Portable Steel Hoppers

Portable Steel Hoppers make handling waste and bulk material safer and more convenient. Fork truck entry tubes are designed to move hopper over rough terrain. Usable fork pockets are 7"W x 2"H on 21⅝" centers (11⅝" fork pocket centers for ½ cubic yard capacity model only). Foot operated caster lock is included. Units tilt with assistance from operator. Handle for dumping contents. **Must be attached to fork truck when dumping.** Welded construction makes them durable. Powder coat blue finish.



Hopper must be attached to a fork truck when dumping.

48 Hours
to Ship

POWDER COATED
TOUGH



MODEL NUMBER	VOLUME CUBIC YARDS	UNIFORM CAPACITY	OVERALL SIZE (W x D x H)	GAUGE OF STEEL	NET WT. (POUND)
P-HOP-0.5	1/2	2,000 lb.	34 ¹³ / ₁₆ " x 52 ¹ / ₄ " x 37 ⁵ / ₈ "	12	286
P-HOP-1	1	2,000 lb.	58 ¹³ / ₁₆ " x 52 ⁷ / ₈ " x 37 ³ / ₈ "	12	372
P-HOP-1.5	1-1/2	2,000 lb.	58 ¹³ / ₁₆ " x 53 ³ / ₈ " x 49 ³ / ₈ "	12	410

8" x 2" PHENOLIC CASTERS, TWO RIGID AND TWO SWIVEL STANDARD

Low Profile Parts Hoppers

These unique products have been designed to function as parts hoppers that may be dumped with the assistance of a fork truck. The low profile design allows the hoppers to be placed underneath machinery as a catch basin for parts. The hoppers reduce the hazards, inconveniences, and time associated with collecting parts off the floor.

The 10 gauge parts hoppers have 7"W x 2"H usable fork pockets on 7¾" centers for dumping the hoppers 90° with a fork truck. Units roll smoothly on 4" x 2" locking swivel phenolic casters, two rigid and two swivel, and include a 34" high removable push handle. Once the material is dumped, the hopper will return to the locked position when lowered to the ground. **Must be attached to fork truck when dumping.**

MODEL NUMBER	VOLUME CUBIC YARDS	UNIFORM CAPACITY	OVERALL SIZE (W x D x H)	USABLE CHUTE SIZE (W x D x H)	NET WT. (POUND)
HOP-LP-N [®]	1/3	2,000 lb.	30" x 54¼" x 34"	29½" x 37" x 13½"	244
HOP-LP [®]	1/2	2,000 lb.	48½" x 56½" x 34"	48½" x 37" x 13½"	335



Low Profile Hoppers

Low profile design (only 22" high) allows for use under machinery and conveyors. Tapered side allows for easy loading and unloading. Designed for containment of scrap, chips, and waste. Constructed of welded 14-gauge steel for strength and lighter weight. Unit rolls smoothly on (2) rigid and (2) swivel 5" x 2" poly-on-steel casters. 37" high push handle is removable and may be used at either end. Industrial grade blue powder coat finish.

MODEL NUMBER	VOLUME CUBIC YARDS	VOLUME CUBIC FEET	UNIFORM CAPACITY	OVERALL SIZE (W x D x H)	NET WT. (POUND)
SLPT-24 [®]	1/4	6.9	1,000 lb.	26¼" x 42" x 37"	105
SLPT-33 [®]	1/3	9.6	1,000 lb.	30¼" x 54" x 37"	115



POWDER COATED TOUGH

48 Hours to Ship



Portable Steel Hopper with Power Traction Drive **24V DC POWER STANDARD**

Reduce worker fatigue and injury with this 1/3 cubic yard Power Traction Drive Hopper. This factory installed option makes portable equipment easy to maneuver with its 240° turning radius, handle grip/throttle, and auto reverse. This state-of-the-art option allows a single operator to perform tasks safely and ergonomically. Includes built-in electric drive motor and DC battery with on-board charger. Maximum speed is 3 mph. Hopper and fork pockets are included. Fork pockets are 7½"W x 2½"H usable on 18" centers. **Must be attached to fork truck when dumping.**

MODEL NUMBER	VOLUME CUBIC YDS.	UNIFORM CAPACITY	OVERALL SIZE (W x D x H)	USABLE CHUTE SIZE (W x D x H)	NET WT. (POUND)
HOP-PTD	1/3	1,500 lb.	26" x 54" x 44¼"	20" x 41¼" x 27 ⁷ / ₈ "	691

*DEPTH DIMENSION IS MEASURED AT TOP OF CHUTE



Portable Steel Dump Trucks

Easily move and empty contents with a balanced design making dumping of scrap, chips, and waste easier. Constructed of welded 14-gauge (12-gauge on model SPTT-15) steel for strength and lighter weight. Unit rolls smoothly on (2) rigid and (2) swivel 5" x 2" poly-on-steel casters. Industrial grade blue powder coat finish.



MODEL NUMBER	VOLUME CUBIC YARDS	VOLUME CUBIC FEET	UNIFORM CAPACITY	OVERALL SIZE (W x D x H)	NET WT. (POUND)
SPTT-05 [®]	2/3	18	1,000 lb.	26¼" x 56 ⁹ / ₁₆ " x 36"	184
SPTT-10 [®]	1	27	1,500 lb.	38¼" x 56 ⁹ / ₁₆ " x 36"	202
SPTT-15 [®]	1-1/2	40	2,000 lb.	38¼" x 63 ⁹ / ₁₆ " x 46"	308

POWDER COATED TOUGH

48 Hours to Ship



New



POWDER COATED TOUGH



Self-Dumping Steel Hopper with Fold Down Front

This Self-Dumping Steel Hopper has a low-profile design with a drop-down front for easy shovel loading. The manual hand latches are used to secure the drop-down front. The manual pull cable is used to dump the hopper from the seat of a fork truck. The hopper returns to the upright position when lowered to the ground. Units feature full 90° dumping, steel construction, and a powder coat blue finish.

MODEL NUMBER	VOLUME CUBIC YARDS	UNIFORM CAPACITY	OVERALL SIZE (W x D x H)	NET WT. (POUND)
HDROP-25-LD	¼	2,000 lb.	25" x 46" x 18"	169
HDROP-50-LD	½	2,000 lb.	25" x 51¼" x 28"	363
HDROP-100-LD	1	2,000 lb.	49" x 51¼" x 28"	330
HDROP-150-LD	1½	2,000 lb.	49" x 52" x 40"	382
HDROP-25-MD	¼	4,000 lb.	25" x 46" x 18"	212
HDROP-50-MD	½	4,000 lb.	25" x 51¼" x 28"	263
HDROP-100-MD	1	4,000 lb.	49" x 51¼" x 28"	367
HDROP-150-MD	1½	4,000 lb.	49" x 52" x 40"	453
HDROP-25-HD	¼	6,000 lb.	25" x 46" x 18"	212
HDROP-50-HD	½	6,000 lb.	25" x 51¼" x 28"	274
HDROP-100-HD	1	6,000 lb.	49" x 51¼" x 28"	397
HDROP-150-HD	1½	6,000 lb.	49" x 52" x 40"	472



New

Gas Powered All-Terrain Hopper

The All-Terrain Gas Powered Hopper is ideal for transporting up to 3,000 pounds of material over rough terrain and is excellent for landscapers and garden centers. Featuring a 6.0 horsepower Briggs & Stratton gas powered motor and a traction drive system for overcoming the roughest of areas. Durable steel construction for added strength and long life. Power dump capabilities for smooth, ergonomically friendly unloading, and an emergency shut-off release for extra safety. An optional Line-X inside hopper coating available upon request.



MODEL NUMBER	VOLUME CUBIC YDS.	OVERALL SIZE (W x D x H)	USABLE CHUTE SIZE (W x D x H)	NET WT. (POUND)
ALL-T-GPT-HOP	2/3	48½" x 72½" x 46"	47½" x 13½" x 47½"	1067

*DEPTH DIMENSION IS MEASURED AT TOP OF CHUTE



New

Triple-Bin Recycling Hopper

This unique Triple-Bin Recycling Hopper is designed for holding different materials. Bins are painted three different colors; green, red, and blue, and include a manual pull-cable to dump from the seat of a fork truck. Each bin may be dumped independently and returns to upright position when lowered to the ground. Includes a safety strap to secure hopper to forklift. (Poly lids are sold separately.) Hoppers have a durable powder coat finish. Each bin holds up to 1/2 cubic yard of material. Maximum total weight capacity is 2,000 pounds evenly distributed.



Shown with optional poly lids, available separately.

MODEL NUMBER	OVERALL SIZE (W x D x H)	INDIVIDUAL BIN SIZE (W x D x H)	UNIFORM CAPACITY	NET WT. (POUND)
ENVIR-BIN	78⅞" x 52⅞" x 30⅟₁₆"	24" x 46½" x 23½"	2,000 lb.	1083



POWDER COATED TOUGH



Open Ended Steel Dumping Hopper

Reduce bending and lifting motions while loading items into a hopper. This hopper will allow for convenient and orderly loading at ground level with its open front design. Flat items can be loaded so more can be put into the hopper. Rolls smoothly on 4" x 2" phenolic casters, the hopper can easily be moved from one location to another. Once the hopper is full or the user has finished loading, the hopper can be easily dumped with the use of a fork truck. **Must be attached to fork truck when dumping.**



MODEL NUMBER	UNIFORM CAPACITY	OVERALL SIZE (W x D x H)	USABLE SIZE (W x D x H)	NET WT. (POUND)
HOP-OE	2,000 lb.	54½" x 64 ¹¹ / ₁₆ " x 53 ¹¹ / ₁₆ "	51¾" x 60" x 48¼"	640

Steel Chute Hoppers

Unit is designed for use in areas with limited space. Fixed-position hopper features a full-height front door that opens to dump the hopper contents. Door will automatically close and lock after contents have been dumped. Front door is opened with a release cable that may be operated from a safe distance. Units may be moved with assistance from a fork truck. Usable fork pockets measure 7½"W x 2½"H on 30" centers. Safety restraint is attached for securing unit to the carriage of the fork truck. Not for use with fine grain or high density materials. Welded steel construction with blue painted finish. **Must be attached to fork truck when dumping.**



MODEL NUMBER	VOLUME CUBIC YARDS	UNIFORM CAPACITY	OVERALL SIZE (W x D x H)	GAUGE OF STEEL	NET WT. (POUND)
C-HOP-200	2	2,000 lb.	60½" x 56 ⁷ / ₈ " x 67"	7	806
C-HOP-300	3	2,000 lb.	85 ⁵ / ₈ " x 57¼" x 67"	7	970

Open Side Hoppers

The Open Sided Hopper is ideal for the material handling industry. The hopper is designed with a steel construction for strength and durability. The open sides provide an ergonomic solution to transferring and unloading large amounts of oversized items. For best use, lift the loaded or unloaded model by utilizing the fork pockets attached to the underside of the hopper. Upon reaching the destination, simply disengage the auto-release lever and the products will flow from the hopper. Volume is approximate size is 1 cubic yards. **Must be attached to fork truck when dumping.**

New



MODEL NUMBER	UNIFORM CAPACITY	OVERALL SIZE (W x D x H)	USABLE SIZE (W x D x H)	NET WT. (POUND)
D-NS-100-LD	2,000 lb.	40" x 52" x 38"	40" x 60½" x 39½"	424

Fabric Hoppers

These hoppers provide an economical and convenient means for storing and moving dry bulk commodities. The coated polypropylene has a polyester webbing for extra strength. The 8 oz. white fabric is UV tested. Fold for easy storage when not in use. The four corner straps provide convenient forklift handling.

MODEL NUMBER	VOLUME CUBIC FEET	UNIFORM CAPACITY	BASE SIZE (W x L)	OVERALL HEIGHT	NET WT. (POUND)
FAB-H-45Ⓢ	40	3,300 lb.	36" x 36"	45"	8
FAB-H-55Ⓢ	50	3,300 lb.	36" x 36"	55"	7
FAB-H-63Ⓢ	78	3,300 lb.	42" x 42"	63"	8




48 Hours
to Ship




Steel Self-Dumping Hoppers

All welded Self-Dumping Hoppers handle bulk materials and scrap easily. Must transport and dump with a forklift or make the unit mobile with the optional casters. Self dumping hoppers are engineered to dump when the safety latch is tripped and to return to an upright locked position when empty. All units come with safety retaining chain and a trip rope assembly. The 1/4 to 2 cubic yard hoppers have a formed stackable base (8 gauge 1/4 - 2 1/2 LD to MD and 3/4 - 2 1/2 HD is .220 gauge), the 3 to 5 cubic yard hoppers have structural bases (1/4" base) with re-enforced rockers for heavy use. Options include: casters, lids (1 to 2 1/2 cubic yard), 3-way entry, lifting lugs, and paint colors. Paint finish is vista green. **Must be attached to fork truck when dumping.**

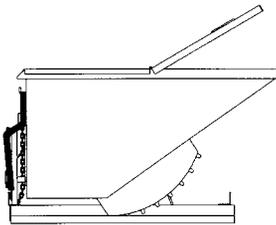

Steel Lid Style A
Single hinge in the center of the hopper with the back half welded closed

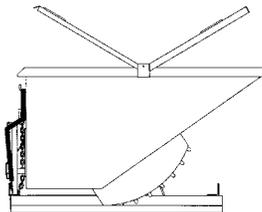

Steel Lid Style C
Single hinge in the center, but both front and back lids can be opened.

STACKABLE STEEL SELF-DUMPING HOPPERS

MODEL NUMBER	VOLUME CUBIC YARDS	UNIFORM CAPACITY	OVERALL SIZE (W x D x H)	GAUGE OF STEEL	NET WT. (POUND)
HOP-100-LD	1	2,000 lb.	41 1/2" x 62" x 37"	12	445
HOP-150-LD	1-1/2	2,000 lb.	59 1/2" x 62" x 37"	12	540
HOP-200-LD	2	2,000 lb.	59 1/2" x 66" x 46"	12	600
HOP-250-LD	2-1/2	2,000 lb.	59 1/2" x 66" x 51"	12	620
HOP-100-MD	1	4,000 lb.	41 1/2" x 62" x 37"	10	495
HOP-150-MD	1-1/2	4,000 lb.	59 1/2" x 62" x 37"	10	630
HOP-200-MD	2	4,000 lb.	59 1/2" x 64" x 46"	10	705
HOP-250-MD	2-1/2	4,000 lb.	59 1/2" x 64" x 51"	10	730
HOP-25-HD	1/4	4,000 lb.	30 3/4" x 49" x 26 1/2"	7	375
HOP-33-HD	1/3	4,000 lb.	30 3/4" x 48 1/2" x 31 1/2"	7	405
HOP-50-HD	1/2	4,000 lb.	41 1/2" x 48 1/2" x 31 1/2"	7	470
HOP-75-HD	3/4	5,000 lb.	41 1/2" x 56 3/4" x 35 1/2"	7	575
HOP-100-HD	1	6,000 lb.	41 1/2" x 62" x 37"	7	625
HOP-150-HD	1-1/2	6,000 lb.	59 1/2" x 62" x 37"	7	785
HOP-200-HD	2	6,000 lb.	59 1/2" x 64" x 46"	7	880
HOP-250-HD	2-1/2	6,000 lb.	59 1/2" x 64" x 51"	7	905
HOP-300-HD*	3	6,000 lb.	65 1/2" x 71 1/2" x 59 1/2"	7	1250
HOP-400-HD*	4	6,000 lb.	85 1/2" x 71 1/2" x 59 1/2"	7	1385
HOP-500-HD*	5	6,000 lb.	105 1/2" x 71 1/2" x 59 1/2"	7	1560

*CASTER BASE FOR CASTER OPTION, MODEL HOP-CASTER-BASE

SPECIALTY STEEL LIDS FOR HOPPERS (SERIES HOP only)

MODEL NUMBER	HOPPER CUBIC YARDS	STYLE	NET WT. (POUND)
LID-100-A	1	A	65
LID-150-A	1-1/2	A	92
LID-200-A	2	A	106
LID-250-A	2-1/2	A	106
LID-100-C	1	C	65
LID-150-C	1-1/2	C	92
LID-200-C	2	C	106
LID-250-C	2-1/2	C	106



Chip & Waste Trucks

- Heavy-Duty Reinforced Steel Construction
- Ideal for Clean Up & Other Material Handling Jobs

Sturdy Chip and Waste Trucks are ideal for collecting and transporting bulk materials or trash. Tapered ends allow easy loading and dumping. Hopper is balanced to maneuver and dump with less effort. All welded 14 gauge steel construction with industrial welds. Optional leak proof seams available. Blue powder coat finish.



MODEL NUMBER	VOLUME CUBIC FEET	UNIFORM CAPACITY	OVERALL SIZE (W x L x H)	CASTER SIZE	NET WT. (POUND)
CHIP-17.5	17.5	1,500 lb.	26" x 67" x 37 1/2"	8" x 2"	146
CHIP-22.2	22.2	2,000 lb.	32" x 67" x 37 1/2"	8" x 2"	155
CHIP-26.7	26.7	2,000 lb.	38" x 67" x 37 1/2"	8" x 2"	167

Bulk Containers

This rugged container maximizes shipping, handling, and storage efficiencies. These units stack three high and safely accommodate up to 700-800 LB. of uniform solid, pourable, granular, and non-regulated material. Molded nesting "lugs" or "ribs" prevent units from jamming together. All are available in a wide variety of colors and with optional permanent, molded-in or raised graphics and logos. Caster and custom options available, contact factory. Lid standard.



SHOWN WITH OPTIONAL CASTERS

MODEL NUMBER	VOLUME CUBIC FEET	UNIFORM CAPACITY	OVERALL SIZE (W x L x H)	CASTER SIZE	NET WT. (POUND)
MHBC-3244	27.5	700 lb.	45" x 45" x 33"	NONE	95
MHBC-4444	35	800 lb.	45" x 45" x 45½"	NONE	120
MHBC-3244-5C	27.5	700 lb.	45" x 45" x 39"	5"	95
MHBC-4444-5C	35	800 lb.	45" x 45" x 51½"	5"	120

SPECIFY COLOR BY ADDING THE SUFFIX TO THE ABOVE PART NUMBER;

BROWN suffix BR; CADET BLUE suffix CB; JADE GREEN suffix JG; ORANGE suffix O; RED suffix R; Yellow suffix Y



SPECIFY COLOR WHEN ORDERING



Tilt Trucks

Durable plastic construction withstands extreme summer heat and allows collecting waste from multiple bins at a collective time. Great for high traffic areas such as: warehouses, fairs, ball parks, schools, etc. Strong, one-piece molded polyethylene body with steel base tip support and a balanced design to allow for simple dumping by one person. Easily portable on 2 large rubber wheels and two swivel wheels. Tapered front makes it easier to pour materials into yet another larger container. Rust resistant powder coated frame for strength and durability. Keep your waste out of sight in our medium duty and easy-to-move tilt trucks. Not for use with fork trucks.



MODEL NUMBER	VOLUME CUBIC YARDS	UNIFORM CAPACITY	OVERALL SIZE (W x L x H)	NET WT. (POUND)
TDT-50-LD-BLACK [®]	1/2	450 lb.	28" x 62" x 35"	91
TDT-50-LD-BLUE [®]	1/2	450 lb.	28" x 62" x 35"	91
TDT-50-LD-RED [®]	1/2	450 lb.	28" x 62" x 35"	91
TDT-50-LD-YELLOW [®]	1/2	450 lb.	28" x 62" x 35"	91
TDT-50-MD-BLACK [®]	1/2	850 lb.	28" x 62" x 35"	108
TDT-50-MD-BLUE [®]	1/2	850 lb.	28" x 62" x 35"	108
TDT-50-MD-RED [®]	1/2	850 lb.	28" x 62" x 35"	108
TDT-50-MD-YELLOW [®]	1/2	850 lb.	28" x 62" x 35"	108
TDT-50-HD-BLACK [®]	1/2	1,400 lb.	28" x 62" x 35"	113
TDT-50-HD-BLUE [®]	1/2	1,400 lb.	28" x 62" x 35"	113
TDT-50-HD-RED [®]	1/2	1,400 lb.	28" x 62" x 35"	113
TDT-50-HD-YELLOW [®]	1/2	1,400 lb.	28" x 62" x 35"	113
TDT-100-LD-BLACK [®]	1	850 lb.	32" x 73" x 42"	113
TDT-100-LD-BLUE [®]	1	850 lb.	32" x 73" x 42"	113
TDT-100-LD-RED [®]	1	850 lb.	32" x 73" x 42"	113
TDT-100-LD-YELLOW [®]	1	850 lb.	32" x 73" x 42"	113
TDT-100-MD-BLACK [®]	1	1,250 lb.	32" x 73" x 43"	135
TDT-100-MD-BLUE [®]	1	1,250 lb.	32" x 73" x 43"	135
TDT-100-MD-RED [®]	1	1,250 lb.	32" x 73" x 43"	135
TDT-100-MD-YELLOW [®]	1	1,250 lb.	32" x 73" x 43"	135
TDT-100-HD-BLACK [®]	1	1,800 lb.	32" x 73" x 43"	140
TDT-100-HD-BLUE [®]	1	1,800 lb.	32" x 73" x 43"	140
TDT-100-HD-RED [®]	1	1,800 lb.	32" x 73" x 43"	140
TDT-100-HD-YELLOW [®]	1	1,800 lb.	32" x 73" x 43"	140



model TD-50-HD-RED

48 Hours to Ship



model TD-50-HD-YELLOW