



Product Price Book

CONTACT DICK JONES SALES, INC.
FOR YOUR DISCOUNTS FROM THESE FACTORY LIST PRICES
Phone 800-441-9955
Fax 800-23-4036
Email dickjones@dickjonessales.com

**Effective
September 3, 2018**

Prices subject to change without notice.
Discard all previous price lists that pertain to the products contained within.



EZ LOADER®

Automatic Work Positioners

New in 2011, one adjustable model will handle most of your pallet loading / unloading needs!

Bishamon automatic work positioners are the modern way to manually load and unload pallets. They improve efficiency and reduce injury by bringing the level and location of the top of load closer to the person doing the work. Pallet loading and unloading time can be reduced by 40%, thereby substantially increasing productivity.

Applications

The new EZ Loader will now handle a wide range of weight capacities from 250 lbs. up to 4,000 lbs.

To make it even better, we added the EZ Adjust knob - a three position knob that allows adjustment of the collapsed capacity without changing the air pressure!

Standard Features


- Self leveling design automatically keeps the top of the load at a convenient working height to help eliminate bending and improve productivity
- Integral rotator ring helps eliminate reaching and stretching
- Captive air operation eliminates cumbersome mechanical springs and gives more controlled (dampened) movement of the platform
- A three position *EZ Adjust* knob allows adjustment of the collapsed capacity without changing air pressure
- Secured ball bearing center pivot of the 43" diameter rotator ring provides smooth, even rotation
- Pressure relief valve prevents excess pressure build-up

- Surfaces are phosphatized and powder coated with a high quality polyester for a lasting, durable finish
- Rollers are entrapped in the base frame and platform for added stability
- A safety finger guard eliminates pinch points with the rotator ring spoke and bearings
- Integral maintenance blocks
- EZ Loaders arrive at your facility fully assembled - just add air!
- Easily transported with a fork truck or via optional portability packages
- The EZ Loader is CE marked under the Machinery Directive (2006/42/EC).

- Rotator ring minimizes walking and reaching during the loading process
- Smooth, even rotator ring motion improves worker efficiency
- Work is always at the optimum level so worker does not have to bend, stretch or strain
- Requires very little maintenance

Advantages

- No mechanical springs, uses captive air to eliminate the need for a constant air supply
- Self-raising and lowering of the pallet as load weight changes
- No springs to change or estimating of weight
- Simple adjustments of weight capacities to work requirements
- Self-dampening eliminates the need for shock absorbers

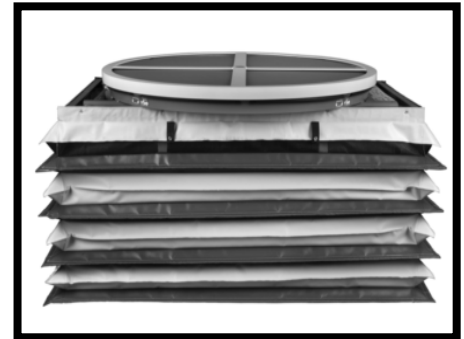


Accordion bellows skirting



3 - Position EZ Adjust Knob



Stainless Steel Model Available

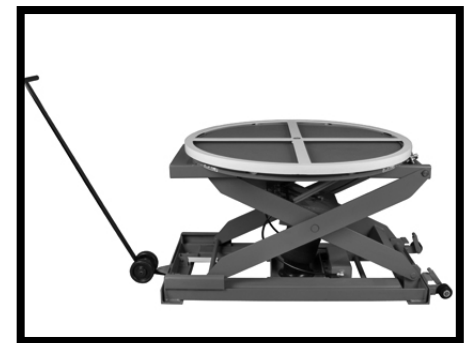

Semi Live Portability



EZ Loader Models

Model	Travel (in)	Capacity (lbs)	Self-Leveling Capacity Range (lbs)		Height (in)		Approx. Ship. Weight (lbs)	Price
			Minimum	Maximum	Lowered	Raised		
EZ Loader	20.0	4,000	250	3,500	10.50	30.50	500	\$2,654
EZ Loader-2848	20.0	4,000	250	3,500	9.63	29.63	500	\$2,874
EZ Loader-3648	20.0	4,000	250	3,500	9.63	29.63	500	\$2,874
EZ Loader-E*	20.0	4,000	250	3,500	10.50	30.50	500	\$4,515
EZ Loader-SS	20.0	4,000	250	3,500	10.50	30.50	500	\$10,061
EZ Loader-2848-SS	20.0	4,000	250	3,500	9.63	29.63	500	\$12,323
EZ Loader-3648-SS	20.0	4,000	250	3,500	9.63	29.63	500	\$12,458

EZ-Loader has a standard powder coated finish
 EZ Loader-E has an FDA compliant powder coated finish with stainless steel solid round top
 EZ Loader-SS, 2848-SS and 3648-SS are grade 304 stainless steel with an electro-polished finish
 EZ Loader-2848 has a fixed (non-rotating) 28" x 48" platform
 EZ Loader-3648 has a fixed (non-rotating) 36" x 48" platform

Accessories for EZ Loaders

Accessory	Description	Price
EZ-BRK	Rotator ring brake to prevent rotation	\$147
EZ-BRK-SS	Rotator ring brake to prevent rotation in stainless steel	\$402
EZ-ABS	Accordion bellow skirting w/frame	\$732
EZ-ABS-SS	Accordion bellow skirting w/ stainless frame and hardware	\$1,041
EZ-SLP	Semi live portability for moving unloaded lift (2 wheels and dolly handle)	\$598
EZ-CART	Cart portability with 2 -6" dia. swivel wheels and 2-6" dia.rigid wheels (adds 7" to lowered height)	\$794
EZ-SRT	Solid 43" diameter round top	\$144
EZ-4444	Oversize rectangular rotating platform (44" x 44")	\$464
EZ-4448	Oversize rectangular rotating platform (44" x 48")	\$464
EZ-4848	Oversize rectangular rotating platform (48" x 48")	\$464
EZ-4448-SS	Oversize rectangular rotating platform in 304 stainless steel (44" x 48")	\$2,293
EZ-4848-SS	Oversize rectangular rotating platform in 304 stainless steel (48" x 48")	\$2,293
EZ-SRT-DNT	Solid 43" diameter round top with 90 degree detents	\$464
EZ-4444-DNT	Oversize rectangular rotating platform (44" x 44") with 90 degree detents	\$678
EZ-4448-DNT	Oversize rectangular rotating platform (44" x 48") with 90 degree detents	\$678
EZ-4848-DNT	Oversize rectangular rotating platform (48" x 48") with 90 degree detents	\$678
Floor TT	Floor mounted 4,500 lbs. capacity 43 in. dia. rotating turntable - (3.18" height)	\$560

* E models are not rust-proof and not approved for washdown applications.
 ** Consult sales for options/accessory prices when not purchased with an EZ Loader unit

The EZ Loader is CE marked under the Machinery Directive (2006/42/EC).

Issued Patents
 United States No. 8,851,237; Australia No. 2011243121; Canada No. 2,789,817;
 European Patent No. 2560915. Granted with effect in France, Germany, Italy, Poland, Spain, United Kingdom



EZ X LOADER™

Economy Automatic Work Positioner

Bishamon automatic work positioners are the modern way to manually load and unload pallets. They improve efficiency and reduce injury by bringing the level and location of the top of the load closer to the person doing the work. Pallet loading and unloading time can be reduced by 40%, thereby substantially increasing productivity.

Standard Features

- Will handle a wide range of weight capacities from 400 lbs. up to 4,000 lbs.
- Self leveling design automatically keeps the top of the load at a convenient working height to help eliminate bending and improve productivity
- Rotator ring with integral finger guard eliminates reaching and stretching
- Captive air operation eliminates cumbersome mechanical springs and gives more controlled (dampened) movement of the platform
- Secured ball bearing center pivot of the 43" diameter rotator ring provides smooth, even rotation

- Pressure relief valve prevents excess pressure build-up
- Surfaces are phosphatized and powder coated with a high quality polyester for a lasting, durable finish
- Rollers are entrapped in the base frame and platform for added stability
- Integral maintenance bars
- EZ X Loaders arrive at your facility fully assembled - just add air!
- Easily transported with a fork truck
- The EZ X Loader is CE Marked under the Machinery Directive (2006/42/EC).

Advantages

- No mechanical springs, uses captive air to eliminate the need for a constant air supply
- Self-raising and lowering of the pallet as load weight changes
- Variable capacity - no springs to change or estimating of weight
- Self-dampening eliminates the need for shock absorbers
- Rotator ring minimizes walking and reaching during the loading process
- Smooth, even rotator ring motion improves worker efficiency
- Work is always at the optimum level so worker does not have to bend, stretch or strain
- Requires very little maintenance


EZ X Loader								
Model	Travel (in)	Capacity (lbs)	Self-Leveling Capacity Range (lbs)		Height (in)		Approx. Ship. Weight (lbs)	Price
			Minimum	Maximum	Lowered	Raised		
EZ X Loader	20.0	4,000	400	2,600	9.8	29.8	500	\$1,853
Accessories for EZ X Loaders								
Accessory	Description							Price
EZ-ABS	Accordion bellow skirting w/frame							\$732
EZ-SRT	Solid 43" diameter round top							\$144
EZ-4444	Oversize rectangular rotating platform (44" x 44")							\$464
EZ-4448	Oversize rectangular rotating platform (44" x 48")							\$464
EZ-4848	Oversize rectangular rotating platform (48" x 48")							\$464



Manifold with Combo Tank Valve, Purge Valve and Pressure Gauge



Hinged Maintenance Bars

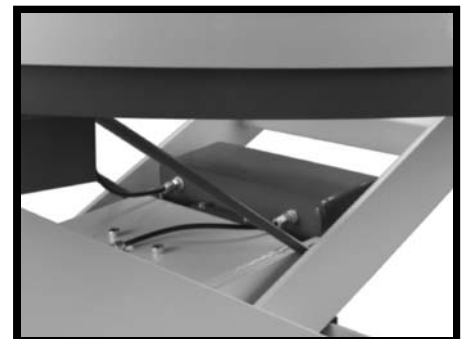


Pneumatic System Reservoir



UniLift™

Pallet Transporter and Positioner

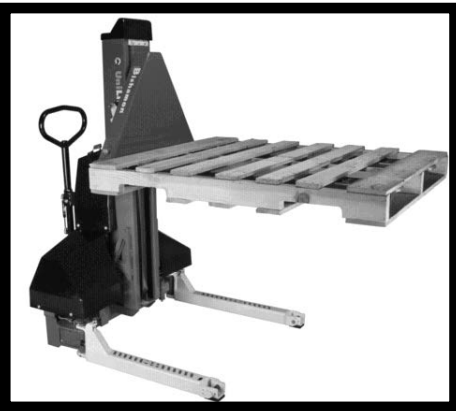

Standard Features

- Can be used with standard GMA pallets, 48" x 40" CHEP pallets and/or skids
- Dual-purpose product allows for both transport and load positioning
- Handles and steers like a standard pallet jack
- Lifting fork height up to 36"
- Lift capacity of 2000# (see chart)
- On board, automatic battery charger
- Efficient 24 VDC battery system powers lift operation
- Electro-mechanical outrigger actuation with position sensors
- Electronic operator console with "Raise" and "Lower" push buttons, dual function key / battery disconnect switch, outrigger position LEDs, charger status LED and battery condition LED
- 8" diameter polyurethane steering wheels
- 3" diameter polyurethane load wheels
- Durable powder coated finish

UniLift					
Model	Pallet Jack Mode Capacity (lbs)	High Lift Mode Capacity 20" Load Center (lbs)	High Lift Mode Capacity 24" Load Center (lbs)	Approximate Shipping Weight (lbs)	List Price
UNI-20	2,000	2,000	1700	640	\$7,617

UiLift Options		
Part Number	Description	List Price
UNI-OLW-01*	Outrigger Load Wheels (allows fine tuning of load position with forks raised- see notes)	\$209
UNI-HCO-01	Hand Control (provides remote operation when forks are raised)	\$179
UNI-CMK-01	Carriage Maintenance Kit (blocks carriage in raised position for maintenance)	\$ 42

* To be used for "fine tuning" load placement and loading /offloading from Bishamon EZ Loader (or other platforms that the deployable outriggers will straddle). The UniLift must be in transport mode (outriggers retracted) for normal transport of loads.

United States Patent: 8,376,089 USA
 China Patent: ZL200780049482.8
 France Patent: EP-FR2102092
 Germany Patent: EP-DE2102092
 Italy Patent: EP-IT2102092
 Japan Patent: 5,575,484
 Korea Patent: 10-1244363
 United Kingdom Patent: EP-UK2102092



Lift Pilot®

Floor Level Pallet Lifter



Standard Features


- Pallet truck accessible – no ramp, bump or obstruction – nothing to stumble over!
- Unique “Space Saving” design with the smallest footprint in the industry – patent pending: “US Patent 7,604,452 Other Patents Pending”
- Operator has full access to pallet sides and end for easy pallet loading or unloading – nothing to reach over!
- 2500# Capacity @ 24” load center
- Telescoping fork technology
- User selectable fork length - 40” & 48”
- Handles GMA pallets from the end
- Handles CHEP pallets from the end or side
- Patented “Foot Clear” safety design with automatic carriage stop
- Intelligent design and operator interface:
 - Pallet presence sensors
 - Highly visible function lights at top of mast
 - Voice commands

Lift Pilot						
Model	Capacity (lbs.) @ 24” Load Center	Max Raised Fork Height (in.)	Footprint (in.)	Power Required	Shipping Weight (lbs.)	Price
LP-25	2,500	37.5	37 x 40	115 VAC	840	\$7,695




EZ OFF LIFTER®

Pallet Truck Accessible Work Positioners

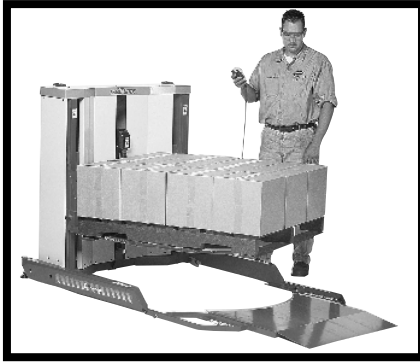

Model EZO-25E

Bishamon EZ Off Lifter® pallet positioners are the ultimate ergonomic solution for loading or unloading pallets in applications when loads are transported with a pallet truck. These revolutionary products provide the answer for maintaining the load at a convenient working height. They also provide easy pallet rotation and near side loading to eliminate excessive lifting, bending, and stretching. They are electro-hydraulic operation and available in a free-standing front access model, and a bolt-down model with ramp access from three positions.

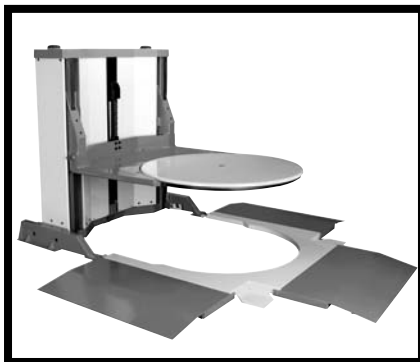

Model EZO-25E-3S Shown with two Optional Ramps

EZ OFF Lifter® Model EZO-25E Standard Features:

- Feet-clear safety circuit automatically stops the platform descent at 9 in. above the floor preventing unintentional foot entrapment under the platform or pallet
- Safety Warning Lights and Alarm alert the operator before the platform lowers from the intermediate safety stop
- Platform Safety Covers guard pinch points around the mast and mast rollers
- Chain Cover guards pinch points around the upper chain wheel
- Hydraulic power unit with unitized control valves and reservoir
- 1/2 HP 115 V electric motor.
- 40.50 in. diameter rotating disk supported by 32 precision ball bearings
- Automatic Platform Lock prevents platform rotation in the lowered position
- Hinged integrated approach ramp
- Integrated lifting tabs and platform catches for transporting with a forklift
- Rear leveling feet
- Durable powder coated finish

EZ OFF Lifter® Model EZO-25E-3S Standard Features:

- Feet-clear safety circuit automatically stops the platform descent at 9 in. above the floor preventing unintentional foot entrapment under the platform or pallet
- Safety Warning Lights and Alarm alert the operator before the platform lowers from the intermediate safety stop
- Platform Safety Covers guard pinch points around the mast and mast rollers
- Chain Cover guards pinch points around the upper chain wheel
- Hydraulic power unit with unitized control valves and reservoir
- 1/2 HP 115 V electric motor.
- 40.50 in. diameter rotating disk supported by 32 precision ball bearings
- Automatic Platform Lock prevents platform rotation in the lowered position
- Pallet truck access from 3 sides
- One fixed ramp fits all 3 sides
- One pallet bumper / stop
- Integrated lifting tabs and platform catches for transporting with a forklift
- Durable powder coated finish

Selector Table For EZ OFF Lifters

Model	Travel (in)	Maximum Capacity (lbs)	Floor Anchors Required	Lowered Height (in)	Raised Height (in)	Maximum Pallet Size (in)	Approximate Shipping Weight (lbs)	List Price
EZO-25E	28.25	2500	No	1.75	30.00	44 x 48	1350	\$8,219
EZO-25E-3S*	28.25	2500	Yes	1.75	30.00	44 x 48	1350	\$8,247
Additional Ramp for EZO-25E-3S								\$399
Additional Bumper / Pallet Stop for EZO-25E-3S								\$95
14" Ramp Extension for EZO-25E-3S								\$200
Foot Control								\$171

* Note: EZO-25E-3S comes with 1 ramp



Blue Label™

BS Series Hand Pallet Trucks

Bishamon BS series hand pallet trucks are premium trucks that set the standard for quality, durability and ease of use. They are available in three capacities and a variety of fork configurations.

Standard Features

- Ergonomic three position hand lever controls lift, lower and neutral functions with the handle in any position
- Handle swivels through 210 degrees
- Steering head and hydraulic assembly use quality, low-friction thrust bearings
- High quality polyurethane wheels and load rollers provide superior rollability and durability
- Premium quality ball bearings in all wheels and load rollers
- Rugged construction, with high strength steel and continuous welds
- One piece formed forks add strength and durability
- Additional fork reinforcement plate provides extra strength to keep forks parallel
- Durable formed steel entry slide guides truck into pallets and diverts debris
- Solid steel, non-adjustable push rods increase durability
- High capacity (6,500 lb model) has dual load rollers in each fork
- Hydraulic assembly and frame are completely rebuildable
- Quality baked enamel finish

Selector Table for BS Series.

Model	Capacity (lbs)	Overall Fork Dimensions (in)		Fork Height (in)		Approx. Shipping Weight (lbs)	
		Length	Width	Lowered	Raised		
BS-55A	5,500	48	27.0	2.9	7.8	224	\$881
BS-55B	5,500	42	27.0	2.9	7.8	215	
BS-55C	5,500	36	27.0	2.9	7.8	205	
BS-55D	5,500	32	27.0	2.9	7.8	198	
BS-55E	5,500	48	20.5	2.9	7.8	198	
BS-55F	5,500	42	20.5	2.9	7.8	190	
BS-55G	5,500	36	20.5	2.9	7.8	182	
BS-55H	5,500	32	20.5	2.9	7.8	174	
BS-25A	2,500	48	27.0	2.0	5.5	203	\$920
BS-65A	6,500	48	27.0	3.3	8.0	281	\$1,009

*Note: Specify model number of pallet jack when ordering.

Accessories

Turnabout Maneuverability adapter that allows a pallet jack to turn in its own length, increasing maneuverability by 72% and greatly reducing the effort of transporting a pallet jack to a pallet and getting it positioned under the load.	List Price \$186
---	---------------------

OPTIMUS™ LK Series

Ergonomic Work Positioners - L2K™, L3K™, L5K™

Designed from the ground up, LK-Series work positioners introduce a new concept in lift table manufacturing. LK lifts are produced in 3 capacity ranges with models to handle most of your lift table needs with fast delivery. LK lifts increase productivity and reduce worker strain in today's harsh industrial environments by eliminating unproductive lifting, bending and stretching that ultimately leads to worker fatigue and injuries.



Standard Features

- Complies with ANSI MH 29.1:2012 "Safety Requirements for Industrial Scissor Lifts"
- 115 volt operator control system
- Flow limiting valves
- Pressure compensated flow control at power unit
- Hinged maintenance bars
- Rollers are entrapped in base frame and platform for added stability
- Self-lubricating, maintenance free bushings at all pivot points
- Unitized, compact, internal power unit and reservoir combination
- Continuous axles at rollers
- Cylinders are heavy duty with chrome plated rods
- Contoured platform corners for operator safety
- Optional 230 and 480 volt power units have a 24 VAC operator control system

- All electrical components are UL or CSA Certified
- Easy view hydraulic reservoir
- Intuitive and user-friendly plug and play controls
- Clean, accessible, maintenance friendly design
- Durable powder coated finish



Optimus Standard Models

Selector Table for L2K Series										
Model	Travel (in)	Capacity (lbs)	Platform Size (in)	Height (in)		Voltage	Approx. Up Time (Sec)	Approx. Dn. Time (Sec)	Approx Shp Weight	Price
				Low.	Rais.					
L2K-2848	30	2,000	28 x 48	8.50	38.50	115 VAC	24	12	469	\$2,462
L2K-3648	30	2,000	36 x 48	8.50	38.50	115 VAC	24	12	490	\$2,532
L2K-TT	30	2,000	43 Dia. Rotating	11.50	41.50	115 VAC	24	12	540	\$2,930
L2K-FC	Foot operated controls with guard. (Hand control standard)									\$171

Selector Table for L3K Series										
Model	Travel (in)	Capacity (lbs)	Platform Size (in)	Height (in)		Voltage	Approx. Up Time (Sec)	Approx. Dn. Time (Sec)	Approx Shp Weight	Price
				Low.	Rais.					
L3K-2848	34	3,000	28 x 48	8.63	42.63	115 VAC	25	12	530	\$2,950
L3K-3648	34	3,000	36 x 48	8.63	42.63	115 VAC	25	12	560	\$3,035
L3K-TT	34	3,000	43 Dia. Rotating	11.75	45.75	115 VAC	25	12	680	\$3,433
L3K5K-FC	Foot operated controls with guard. (Hand control standard)									\$243

Selector Table for L5K Series										
Model	Travel (in)	Capacity (lbs)	Platform Size (in)	Height (in)		Voltage	Approx. Up Time (Sec)	Approx. Dn. Time (Sec)	Approx Shp Weight	Price
				Low.	Rais.					
L5K-3256	39.25	5,000	32 x 56	8.75	48	115 VAC	50	24	730	\$3,786
L5K-4872	39.25	5,000	48 x 72	8.75	48	115 VAC	50	24	1030	\$4,069
L3K5K-FC	Foot operated controls with guard. (Hand control standard)									\$243

OPTIMUS™ LK Series

L2K™, L3K™, L5K™

Optimus Non-Standard Models

Selector Table for L2K Series										
Model	Travel (in)	Capacity (lbs)	Platform Size (in)	Height (in)		Voltage	Approx. Up Time (Sec)	Approx. Dn. Time (Sec)	Approx Shp Weight	Price
				Low.	Rais.					
L2K-TT4444	30	2,000	44 x 44 Rotating	11.50	41.50	115 VAC	24	12	630	\$3,416
L2K-TT4448	30	2,000	44 x 48 Rotating	11.50	41.50	115 VAC	24	12	640	\$3,416
L2K-TT4848	30	2,000	48 x 48 Rotating	11.50	41.50	115 VAC	24	12	650	\$3,416

Options & Accessories for L2K Series			Price
L2K-FC	Foot operated controls with guard (Hand control standard)		\$171
L2K3K-ABS	Accordion bellows skirting for L2K		\$878
EZ-SLP	Semi-live portability for moving unloaded lift (2 wheels and dolly handle)		\$598
EZ-CART	Cart portability with 2 swivel wheels and 2 rigid wheels (adds 7" to lowered and maximum raised height)		\$794

Selector Table for L3K Series										
Model	Travel (in)	Capacity (lbs)	Platform Size (in)	Height (in)		Voltage	Approx. Up Time (Sec)	Approx. Dn. Time (Sec)	Approx Shp Weight	Price
				Low.	Rais.					
L3K-SPECIAL	34	3,000	(28 x 48 to 48 x 72 in 2" increm.)	8.63	42.63	115 VAC	25	12	600	\$3,283
L3K-TT4444	34	3,000	44 x 44 Rotating	11.75	45.75	115 VAC	25	12	770	\$3,918
L3K-TT4448	34	3,000	44 x 48 Rotating	11.75	45.75	115 VAC	25	12	780	\$3,918
L3K-TT4848	34	3,000	48 x 48 Rotating	11.75	45.75	115 VAC	25	12	790	\$3,918
L3K-SS	34	3,000	(28 x 52 to 48 x 72 in 2" increm.)	8.63	42.63	115 VAC	25	12	600	\$17,318

Options & Accessories for L3K Series			Price
L3K5K-FC	Foot operated controls with guard (Hand control standard)		\$243
L2K3K-ABS	Accordion bellows skirting		\$878
EZ-CART	Cart portability with 2 swivel wheels and 2 rigid wheels (adds 7" to lowered and maximum raised height)		\$794
LK-230PU-1	230 VAC, 1 Phase motor with 24V controls: no change in up time		\$309
LK-230PU-3	230 VAC, 3 Phase motor with 24V controls: decreases up time to 14 seconds		\$309
LK-480PU	480 VAC, 3 Phase motor with 24V controls: decreases up time to 14 seconds		\$309


Selector Table for L5K Series										
Model	Travel (in)	Capacity (lbs)	Platform Size (in)	Height (in)		Voltage	Approx. Up Time (Sec)	Approx. Dn. Time (Sec)	Approx Shp Weight	Price
				Low.	Rais.					
L5K-SPECIAL	39.25	5,000	(32 x 56 to 48 x 84 in 2" increm.)	8.75	48	115 VAC	50	24	1075	\$4,318
L5K-TT	39.25	5,000	43 Diameter Rotating	11.87	51.12	115 VAC	50	24	870	\$4,402
L5K-TT4444	39.25	5,000	44 x 44 Rotating	11.87	51.12	115 VAC	50	24	1000	\$4,888
L5K-TT4448	39.25	5,000	44 x 48 Rotating	11.87	51.12	115 VAC	50	24	1015	\$4,888
L5K-TT4848	39.25	5,000	48 x 48 Rotating	11.87	51.12	115 VAC	50	24	1030	\$4,888

Options & Accessories for L5K Series			Price
L3K5K-FC	Foot operated controls with guard (Hand control standard)		\$243
L5K-ABS	Accordion bellows skirting		\$1123
LK-230PU-1	230 VAC, 1 Phase motor with 24V controls: no change in up time		\$309
LK-230PU-3	230 VAC, 3 Phase motor with 24V controls: decreases up time to 14 seconds		\$309
LK-480PU	480 VAC, 3 Phase motor with 24V controls: decreases up time to 14 seconds		\$309

Some options and accessories are not field installable - consult sales

Note: Not all options are compatible - consult sales

Option and accessory pricing applies to options purchased with an LK-Series lift table at time of order

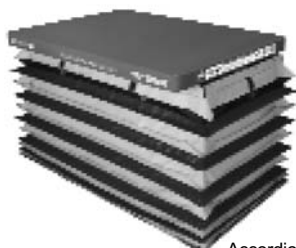

Accordion Bellows Skirting Option



Cart Portability Option



SL Portability Option



Foot Control Option



CompacLift™

X Series Scissor Lift Tables

Bishamon X series Scissor lift tables are versatile, compact hydraulic lifts available in a wide variety of capacities and platform sizes. X Series CompacLift™ tables are most widely used in machine tool or other production line manufacturing activities requiring heavy-duty lifting and positioning within a confined area.

Standard Features

- Compact design
- Manual, electric and air operated models available
- Rugged construction, with heavy gauge steel and sturdy welds throughout
- Steel work platforms
- Entrapped rollers for increased stability
- Superior hydraulic systems proven on a range of Bishamon lift products
- Hand control standard on electric versions
- Removable-storable operators foot pedal and lowering control on manual models
- Quality baked enamel finish


Selector Table for X Series

Model	Travel (in)	Capacity (lbs)	Table Sizes (in)	Height (in)		Strokes to Max. Hgt. C Models	Approx. Up Time (sec) E / P Models Loaded	Approx. Ship Weight (lbs)	Price
				Lowered	Raised				
X-20C	16.0"	440	19.5 x 25.5	5.00	21.00	28	-	121	\$ 930
X-25C	22.0"	550	19.5 x 32.0	6.00	28.00	42	-	157	\$1,024
X-25E	22.0"	550	19.5 x 32.0	6.00	28.00	-	9	190	\$1,867
X-25P	22.0"	550	19.5 x 32.0	6.00	28.00	-	36	190	\$1,867
X-50C	25.5"	1,100	20.0 x 40.0	6.00	31.50	46	-	253	\$1,243
X-50E	25.5"	1,100	20.0 x 40.0	6.00	31.50	-	12	285	\$2,116
X-50P	25.5"	1,100	20.0 x 40.0	6.00	31.50	-	40	285	\$2,116
X-75C	25.5"	1,650	20.0 x 40.0	6.00	31.50	67	-	256	\$1,342
X-75E	25.5"	1,650	20.0 x 40.0	6.00	31.50	-	17	288	\$2,179
X-75P	25.5"	1,650	20.0 x 40.0	6.00	31.50	-	58	288	\$2,179
X-30SC	45.0"	660	20.0 x 40.0	9.25	54.25	54	-	315	\$1,493
X-30SE	45.0"	660	20.0 x 40.0	9.25	54.25	-	14	345	\$2,272
X-30SP	45.0"	660	20.0 x 40.0	9.25	54.25	-	47	345	\$2,247
X-50SE	25.5"	1,100	18.0 x 25.5	8.25	33.75	-	14	235	\$2,179
X-50SP	25.5"	1,100	18.0 x 25.5	8.25	33.75	-	47	235	\$2,179

X-Series Accessories & Options

Foot Operated Control	Foot control switch with guard for electric models	\$171
Bellows Skirting X-20	Accordion bellows skirting for X-20 model	\$601
Bellows Skirting X-25	Accordion bellows skirting for X-25 model	\$582
Bellows Skirting X-50	Accordion bellows skirting for X-50 model	\$667
Bellows Skirting X-75	Accordion bellows skirting for X-75 model	\$667
Bellows Skirting X-30S	Accordion bellows skirting for X-30S model	\$930
Bellows Skirting X-50S	Accordion bellows skirting for X-50S model	\$582

C - Manual Foot Pedal Pump
 E - Electric / Hydraulic 115V, 1/2HP external power unit assembly - runs at 8.8 amps
 P - Air / Hydraulic - foot control is standard
 S - Double scissors

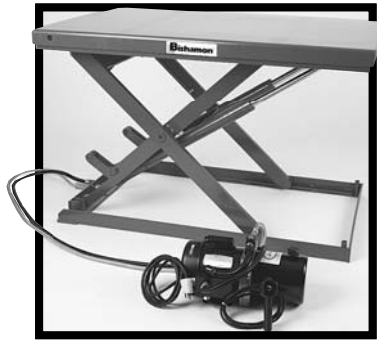

Lo-Profile™ LX Series Scissor Lift Tables

Bishamon LoProfile™ lift tables provide lifting power from a very low elevation. This low collapsed height provides easy access for pallet jacks, wheeled carts and other devices requiring low profile.

Standard Features

- Lowest collapsed heights in the industry
- Rugged construction, with heavy gauge steel and sturdy welds throughout
- Steel work platforms
- Compact design
- Superior hydraulic systems proven on a range of Bishamon lift products
- Steel braid hydraulic hose 8' long
- Hand control on 8' cord
- Four-sided electric perimeter toeguard for operator safety
- External power unit
- Quality baked enamel finish

Selector Table for LX Series										
Model	Capacity (lbs)	Table (in)		Table Height (in)		Power Units (see notes)	Approx Time Loaded (sec)		Approx. Ship Weight (lbs)	Price
		Width	Length	Minimum	Maximum		Up	Down		
LX-25S	550	23.5	32.5	2.9	20.9	1/2 HP / 115V	7	5	213	\$2,634
LX-25L	550	23.5	40.0	2.9	30.0	1/2 HP / 115V	10	8	257	\$2,697
LX-50S	1100	23.5	32.5	2.9	20.9	1/2 HP / 115V	13	8	228	\$3,116
LX-50L	1100	23.5	40.0	2.9	30.0	1/2 HP / 115V	20	10	359	\$3,185
LX-100W	2200	34.5	51.0	3.3	38.6	E / 1 / 3 / 3-480*	16	12	606	\$4,309
LX-100N	2200	24.0	51.0	3.3	38.6	E / 1 / 3 / 3-480*	16	12	589	\$4,214
LX-200WM	4400	45.5	61.5	4.3	39.4	E / 1 / 3 / 3-480*	34	26	1110	\$5,683
LX-200N	4400	33.5	55.5	4.3	39.4	E / 1 / 3 / 3-480*	34	26	860	\$5,613
LX-200WL	4400	45.5	81.0	4.3	39.4	E / 1 / 3 / 3-480*	34	26	1435	\$5,807
LX Series Accessories / Options										
Accessories		Description							Price	
Foot Operated Control		Foot control							\$171	
Approach Ramp		Approach ramp for carts (approx. 23 in length)							\$290	
Approach Ramp LX-200		Approach ramp for carts (approx. 23 in. length)							\$387	
Pallet Truck Approach Ramp		Approach ramp for pallet truck access (approx. 50 in. length)							\$421	
Pallet Truck Approach Ramp LX-200		Approach ramp for pallet truck access (approx. 60 in. length)							\$483	

*E = 1 HP / 115V

*1 = 1 HP / 230V / 1 PHASE

*3 = 1 HP / 230V / 3 PHASE

*3-480 = 1 HP / 480V / 3 PHASE

Note: 3 Phase up time listed above. 1Phase up time is approximately double.



EZ Up[®] Pneumatic Lift Table

Bishamon EZU Series Pneumatic Lift Tables are the convenient way to use air to raise, lower, and position a load. Using air instead of electrically driven hydraulics reduces maintenance and eliminates the risk of sparks in applications where sparks can be hazardous.

Standard Features

- Firestone Airstroke Actuator™ raises and lowers the platform to vertically position the load to the desired height
- Hand or foot control standard
- Durable powder coated finish
- Heavy-duty structural steel construction with rugged base frame
- Entrapped rollers for added stability
- Hinged maintenance bars
- Rotating models feature a secured center pivot with ball bearing that provides smooth, even rotation
- High quality 3 position hand lever controls allows easy operation
- Clean design with minimum of maintenance needed
- Easily relocated with fork lift

Selector Table For EZU Series

Model	Travel (in)	Capacity (lbs)		Height (in)		Standard Platform (in)	Shipping Weight (lbs)	Price
		@ 90 PSI	@ 100 PSI	Lowered	Raised			
EZU-15-R	20	1,500	1,700	10.6	30.6	43 dia.	525	\$3,050
EZU-15	20	1,500	1,700	9.6	29.6	28 x 48	480	\$2,911
EZU-15R-SS*	20	1,500	1,700	10.6	30.6	43 dia.	525	Call


Accessories for EZ Up

Accessory	Description	Price
EZ-BRK	Rotator ring brake kit to prevent rotation of ring	\$147
EZ-ABS	Accordion bellows skirting w/frame	\$732
EZU-SLP	Semi live portability (moving while lift is unloaded) with 2 wheels and dolly handle	\$598
EZ-4444	Oversize rectangular rotating platform (44" x 44")	\$464
EZ-4448	Oversize rectangular rotating platform (44" x 48")	\$464
EZ-4848	Oversize rectangular rotating platform (48" x 48")	\$464
EZ-SRT-DNT	Solid 43" diameter round top with 90 degree detents	\$464
EZ-4444-DNT	Oversize rectangular rotating platform (44" x 44") with 90 degree detents	\$678
EZ-4448-DNT	Oversize rectangular rotating platform (44" x 48") with 90 degree detents	\$678
EZ-4848-DNT	Oversize rectangular rotating platform (48" x 48") with 90 degree detents	\$678
EZ-PV	Pedestal Valve Stand For Hand Control	\$153


* Stainless Steel Model for washdown and clean room applications

All accessories are field installable

** Consult sales for options/accessory prices when not purchased with an EZ-UP unit

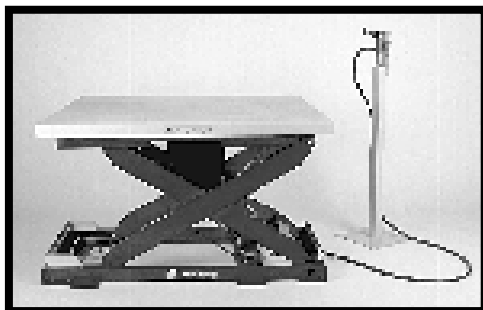

EZU-15-R with optional 48" x 48" rotating top and pedistal valve stand

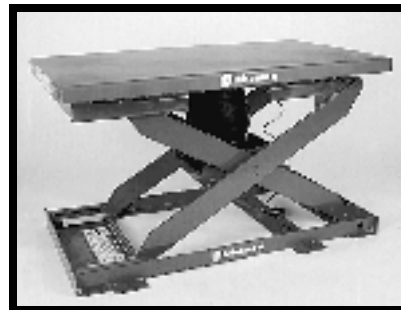

EZU-15 with standard 28" x 48" top



MobiLift™

BX & BXB Mobile Lift Tables

Bishamon MobiLift™ scissor lift tables are rugged industrial lift tables with push-handles and casters. BX series lift tables provide improved ergonomics by placing the load at a convenient working height while providing the mobility to locate the lift where it is needed. By minimizing undesirable lifting, reaching and stretching, MobiLifts increase productivity and help decrease workplace injuries.

Standard Features - All Models

- Heavy-duty construction with captured scissor rollers for maximum stability
- High quality casters and wheels for exceptional rollability
- Foot actuated caster brake
- Heavy-duty maintenance, scissor lock pin
- Durable powder-coated finish

Standard Features - Manual Models

- Superior hydraulic systems feature an integrated pump-cylinder for maximum reliability
- Ergonomic push handle with convenient lever style lowering control
- Lowering control automatically stops when released for added safety

Additional Features - Electric Models

- Removable push-button control on cord with convenient handle mount
- Ergonomic handle with integrated safety guard
- Easily accessible On/Off switch with integrated circuit breaker
- Enclosed automatic charger with removable power cord
- Green-Yellow-Red indicator lights provide quick indication of battery charge
- Easily accessible, adjustable lowering speed control
- Upper travel limit switch

Selector Table For BX & BXB Series Mobile Lift Tables

Model	Travel (in)	Capacity (lbs)	Platform Height (in)		Platform Size (in) Width x Length	Overall Size (in) Width x Length x Height	Strokes Or Lift Speed To Max. Ht.	Approx. Ship Weight (lbs)	Price
			Minimum	Maximum					
BX-15	20.4	330	8.4	28.8	17.7 x 27.6	17.7 x 33.6 x 31.3	15	75	\$699
BX-25	22.7	660	11.3	34.1	19.7 x 32.0	19.7 x 39.7 x 35.3	25	200	\$868
BX-50	22.1	1,100	17.2	39.3	20.4 x 39.8	20.5 x 46.9 x 37.8	50	300	\$1,187
BX-75	22.1	1,760	17.2	39.3	20.4 x 39.8	20.5 x 49.5 x 37.8	67	300	\$1,342
Double Scissor Models									
BX-30S	45.1	660	17.0	62.1	20.4 x 39.8	20.5 x 49.5 x 37.8	64	340	\$1,574
BX-50S	23.0	1,100	16.5	39.5	18.1 x 25.6	18.1 x 37.2 x 37.0	66	275	\$2,079
BX-50W	45.1	1,100	17.0	62.1	20.4 x 39.8	20.5 x 49.5 x 37.8	90	380	\$2,139
Stainless Steel Models									
BXS-10	20.4	220	8.4	28.8	17.7 x 27.6	17.7 x 33.6 x 31.3	15	75	\$2,633
BXS-20	22.7	440	11.3	34.1	19.7 x 32.0	19.7 x 39.7 x 35.3	25	200	\$3,954
Battery Operated Models									
BX-30B	23.5	660	11.5	35.0	19.7 x 32.1	19.7 x 41.7 x 34.6	10 sec.	280	\$2,061
BX-50B	23.1	1,100	17.2	40.4	20.5 x 39.8	20.4 x 50.0 x 37.4	10 sec.	390	\$2,242
BX-80B	21.1	1,760	17.2	38.4	20.5 x 39.8	20.5 x 49.4 x 37.4	12 sec.	400	\$2,304
Double Scissor Battery Operated Models									
BX-15WB	39.0	330	15.2	54.1	19.7 x 32.1	19.7 x 39.7 x 35.4	10 sec.	330	\$2,191
BX-30SB	46.3	660	17.5	63.8	20.5 x 39.8	20.4 x 50.0 x 37.4	12 sec.	450	\$2,497
BX-50WB	46.1	1,100	17.1	63.2	20.5 x 39.8	20.4 x 50.0 x 37.4	17 sec.	490	\$3,503



MobiLeveler[®]

ESX Series Mobile Work Positioners

Bishamon ESX series scissor tables are fully adjustable, weight sensitive, self-leveling, mobile work positioners. They improve efficiency and help prevent injury by bringing the top of the load to a convenient working height. An easily accessible control knob provides infinitely adjustable weight settings within the capacity range.

Standard Features

- Load weight compensation keeps the top of the load at a convenient working height
- Patented design with an easily accessible gauged weight-selector knob
- High quality casters and wheels for exceptional rollability
- Foot actuated caster brake
- Heavy-duty maintenance, scissor-lock pin
- Steel work platforms
- Rugged construction, with heavy-gauge steel and sturdy welds throughout
- Clean design with minimum of maintenance requirement
- Durable powder coated finish


Selector Table for ESX Series

Model	Travel (in)	Collapsed Capacity Range (lbs)		Height (in)		Table Sizes (in)		Overall Size (in)			Approx. Shipping Wt. (lbs)	Price
		Minimum	Maximum	Min.	Max.	Width	Length	Width	Length	Height		
ESX-10	15.8	66	220	10.4	26.2	17.8	x 27.6	17.8	33.3	31.3	90	\$812
ESX-21	16.6	175	460	13.8	30.4	19.8	x 32.3	19.8	40.0	35.5	170	\$1,092
ESX-40	16.6	220	880	14.5	31.1	20.5	x 39.8	20.5	48.5	35.5	280	\$1,611




SkidLift™

LV / LVE Series Skid Lifts



Bishamon skid lifts are rugged high-rise, fork style lifts that provide improved ergonomics and a functional ease of access for your workforce. By raising the top of the load to a convenient working height and providing easy mobility, skid lifts improve material handling productivity and reduce potential worker injury. Manual models have an integrated foot pump while a 12-volt DC power unit provides the lifting power on electric models. These versatile lifts have a dual functionality - not only do they lift and lower skids (open bottom, euro style pallets), the mobility feature allows the skids to be moved in and out of the work cell.



Standard Features

- Easily accessible hand controls
- Heavy gauge steel and sturdy welds throughout
- Steel lifting forks
- Twin heavy-duty lifting chains with 2-to-1 lifting ratio
- 180-degree rotating steering handle on LV-100 models
- Polyurethane wheels with quality bearings

- Lower captured roller channel provides increased stability
- Superior hydraulic systems proven on a range of Bishamon lift products
- Locking foot brake
- Quality baked enamel finish

Additional Features on LVE Models

- 12 volt, deep cycle battery
- Automatic battery charger

Selector Table for LV & LVE Series									
Model	Travel (in)	Capacity (lbs)	Overall Fork Dimensions (in)		Fork Height (in)		Strokes or Up Time (sec)	Approx. Ship. Weight (lbs)	Price
			Width (OD)	Length	Lowered	Raised			
LV-10	29.5	1,000	20.5	42.5	3.3	32.8	50	300	\$1,374
LV-10W	29.5	1,000	27.0	42.5	3.3	32.8	50	325	\$1,443
LV-100	29.5	2,200	20.5	42.5	3.3	32.8	48	350	\$2,472
LV-100W	29.5	2,200	27.0	42.5	3.3	32.8	48	375	\$2,541
<i>Battery Operated Models</i>									
LVE-50E	29.5	1,100	20.5	42.5	3.3	32.8	7	340	\$3,215
LVE-50WE	29.5	1,100	27.0	42.5	3.3	32.8	7	370	\$3,541
LVE-100E	29.5	2,200	20.5	42.5	3.3	32.8	7	440	\$3,990
LVE-100WE	29.5	2,200	27.0	42.5	3.3	32.8	7	460	\$4,309

Accessories for LV Series		
LV-10 / 100 Table	Table top accessory converts skid lift into mobile lift table / work station	\$153
LV-10W / 100W Table	Table top accessory for wide model converts skid lift into mobile lift table / work station	\$161