


**Invincible® QUICK SHIP**

Rev. 01/14

**QUICK SHIP LIST PRICING**

UPRIGHT FRAMES				
IU18: 3" X 1-5/8" X 14 GA				
D X H	Capacity	Model #	List	Lbs.
36 x 96	See IU18 Capacity Chart to Right	IU18360096	\$110.56	37.59
36 x 144		IU18360144	\$159.83	54.97
42 x 96		IU18420096	\$113.34	39.27
42 x 120		IU18420120	\$146.75	50.44
42 x 144		IU18420144	\$163.66	57.28
42 x 192		IU18420192	\$213.32	75.30
48 x 96		IU18480096	\$116.20	41.00
48 x 120		IU18480120	\$150.78	52.87
48 x 144		IU18480144	\$167.61	59.67
IU24: 3" X 3" X 14 GA				
42 x 144	See IU24 Capacity Chart to Right	IU24420144	\$185.95	72.14
42 x 192		IU24420192	\$243.15	95.17
42 x 240		IU24420240	\$295.95	118.20
48 x 192		IU24480192	\$248.13	98.18
SU29: 3" X 3" X 13 GA C/W 5" X 8" FP				
42 x 144	See Chart to Right	SU29420144	\$234.73	92.50
42 x 192		SU29420192	\$298.18	119.82

UPRIGHT FRAME CAPACITY			
Beam Spacing	IU18	IU24	SU29
36	19,380	28,800	35,500
42	18,100	27,200	33,600
48	16,700	25,300	31,100
54	15,300	23,200	28,600
60	13,800	21,100	26,000
66	12,300	19,000	23,400
72	10,900	16,900	20,800
78	9,500	14,900	18,200
84	8,300	13,100	16,100
90	7,300	11,600	14,200
96	6,500	10,300	12,700

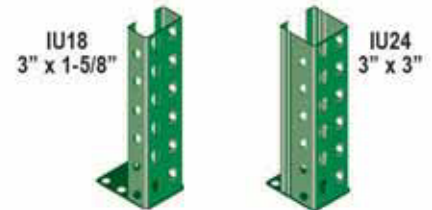

**Invincible®**

The most common connection used in the rack industry today. Two 'teardrop' punches side-by-side going all the way up the upright on 2" centers making beams adjustable on the upright every 2". Standard colors are green uprights with orange beams.

BEAMS				
H x L	CAP/PR	Model #	List	Lbs.
3.0 x 48	7,383	IBX30048	\$31.84	10.65
3.5 x 96	4,044	IBX35096	\$52.80	21.05
3.9 x 96	5,047	IBX39096	\$54.58	22.39
4.3 x 96	6,111	IBX43096	\$56.58	23.66
4.3 x 108	5,000	IBX43108	\$62.04	26.37
4.3 x 120	4,062	IBX43120	\$67.49	29.08
4.3 x 144	3,000	IBX43144	\$78.38	34.50
5.5 x 108	8,873	IBN55108	\$77.47	36.07
5.5 x 144	5,569	IBN55144	\$98.96	47.44
6.0 x 144	7,820	IBH60144	\$118.16	59.91

GALVANIZED WIRE DECKS				
Depth x Width	Capacity	Model #	List	Lbs.
36" x 46" x 3 channel	3,250	3646A3	\$37.79	18.58
36" x 52" x 3 channel	3,250	3652A3	\$40.43	20.09
36" x 58" x 4 channel	3,900	3658A4	\$47.30	23.83
42" x 46" x 3 channel	2,610	4246A3	\$42.33	21.40
42" x 52" x 3 channel	2,610	4252A3	\$45.32	23.11
42" x 58" x 4 channel	3,150	4258A4	\$53.15	27.48
48" x 46" x 3 channel	2,100	4846A3	\$47.54	24.61
48" x 52" x 3 channel	2,100	4852A3	\$50.97	26.57
48" x 58" x 4 channel	2,630	4858A4	\$59.84	31.61

**GENERAL NOTES**

1. Beam capacities are for uniformly distributed loads.
2. Beam capacities are based on a deflection specification of beam length/180 or on connector shear capacity, whichever is limiting.
3. Beams over 120" in length should be tied across the middle to prevent beam spread.
4. Beams over 90" that support loose decking should be tied across the middle to prevent beam spread.
5. Please call for any beam spacing on an upright greater than 96".

1. Beam capacities are for uniformly distributed product loads. 2. Beam capacities are based on a deflection specification of beam length/180 or on connector shear capacity, whichever is limiting. 3. Beams over 120" in length should be tied across the middle to prevent beam spread. 4. Beams over 90" that support loose decking should be tied across the middle to prevent beam spread.

ROW SPACERS			
Length	Model #	List	Lbs.
6"	RSIN06	\$7.93	0.87
8"	RSIN08	\$8.53	1.10
12"	RSIN12	\$9.94	1.55

WALL SPACERS			
Length	Model #	List	Lbs.
6"	WSIN06	\$7.26	0.87
8"	WSIN08	\$7.86	1.10
12"	WSIN12	\$9.27	1.55

CROSSBARS			
Depth	Model #	List	Lbs.
36"	A1036G	\$9.85	4.37
42"	A1042G	\$11.36	5.13
48"	A1048G	\$12.87	5.88

STANDARD POST PROTECTOR			
Height	Model #	List	Lbs.
12"	I5712-P	\$42.42	11.10

**STANDARD RACK ACCESSORIES**

Rev. 01/14

Invincible Wall Spacer



Reliable or Lynx Rack Wall Spacer



ROW SPACERS COLOR: GALVANIZED			
Length	Model #	List	Lbs.
3	RSIN03	Call For Pricing	0.53
6	RSIN06	\$7.93	0.87
8	RSIN08	\$8.53	1.10
9	RSIN09	Call For Pricing	1.21
12	RSIN12	\$9.94	1.55
16	RSIN16	Call For Pricing	2.01
18	RSIN18	Call For Pricing	2.23
22	RSIN22	Call For Pricing	2.69
24	RSIN24	Call For Pricing	2.91

WATERFALL CROSSBARS COLOR: GALVANIZED			
Length	Model #	List	Lbs.
30	A1030G	\$8.35	3.61
36	A1036G	\$9.85	4.37
40	A1040G	\$10.86	4.87
42	A1042G	\$11.36	5.13
44	A1044G	\$11.86	5.38
48	A1048G	\$12.87	5.88
54	A1054G	\$14.46	6.64
60	A1060G	\$15.98	7.40
66	A1066G	\$17.49	8.16
72	A1072G	\$19.01	8.91

Invincible Wall Spacer



Reliable or Lynx Rack Wall Spacer



WALL SPACERS COLOR: GALVANIZED			
Length	Model #	List	Lbs.
3	WSIN03	Call For Pricing	0.53
6	WSIN06	\$7.26	0.87
8	WSIN08	\$7.86	1.10
9	WSIN09	Call For Pricing	1.21
12	WSIN12	\$9.27	1.55



POST PROTECTOR COLOR: YELLOW			
Height	Model #	List	Lbs.
6	I5706-P	\$33.78	6.85
12	I5712-P	\$42.42	11.10
18	I5718-P	\$55.03	15.35
24	I5724-P	\$67.96	19.60




**NOTE:** All prices and weights below are per item. For foot-plate adders, please remember to add two (2) per frame.

SHIMS AND ANCHORS				
Size	Model #	List	Lbs.	
SHIM 4 X 4-1/4 X 10 GA	FP001	\$1.27	0.63	
SHIM 4 X 5-7/8 X 10 GA	FP002	\$1.75	0.87	
SHIM 4 X 7-1/4 X 10 GA	FP003	\$2.15	1.07	
SHIM 5 X 8 X 12 GA	SH007	\$10.01	1.11	
SHIM 8 X 8 X 12 GA	SH009	\$18.44	1.76	
ANCHOR 1/2 X 4-1/2	I33536	\$3.41	0.25	
ANCHOR 5/8 X 5	I33534	\$4.37	0.46	

**NOTE:** Will not fit around uprights with non-standard 'large' footplates.

BOLT-ON POST PROTECTOR COLOR: ORANGE			
Height	Model #	List	Lbs.
12	I5812	CALL	6.00
24	I5824	CALL	12.05



**IMPORTANT:**

Only the most common parts in their most commonly requested sizes are shown. Please call us for other sizes and other accessories such as Fork Clearance Bars, Drum Cradles, Drop-in Crossbars, etc. . .

# LYNX RACK



Lynx® QUICK SHIP

Rev. 07/13

QUICK SHIP LIST PRICING

UPRIGHT FRAMES				
D x W	Capacity	Model #	List	Lbs.
36 x 72	See LU18 Capacity Chart to Right	LU18360072	\$95.75	31.29
36 x 96		LU18360096	\$112.24	41.21
36 x 120		LU18360120	\$144.68	52.69
36 x 144		LU18360144	\$162.59	60.67
42 x 72		LU18420072	\$97.64	32.68
42 x 96		LU18420096	\$114.58	42.88
42 x 120		LU18420120	\$148.09	55.10
42 x 144	LU18420144	\$165.83	62.97	
36 x 144	See LU24 Capacity Chart to Right	LU24360144	\$177.76	72.05
42 x 120		LU24420120	\$160.84	64.37
42 x 144		LU24420144	\$181.36	74.30
42 x 192		LU24420192	\$237.39	98.24

UPRIGHT FRAME CAPACITY		
Beam Spacing	LU18	LU24
36	19,380	24,957
42	17,394	22,614
48	15,936	21,179
54	14,593	19,673
60	13,193	18,086
66	11,777	16,453
72	10,361	14,808
78	9,082	13,159
84	8,011	11,697
90	7,109	10,449
96	6,334	9,379

BEAMS				
H x L	CAP/PR	Model #	List	Lbs.
4 x 96	4048	LBX39096	\$55.41	23.51
5 x 96	6054	LBX48096	\$60.05	26.63
4.5 x 108	4026	LBX43108	\$62.45	27.49
5 x 120	4412	LBX48120	\$71.03	32.51
5.5 x 96	8701	LBN55096	\$71.30	33.40
5.5 x 108	7723	LBN55108	\$78.15	37.19
5.5 x 120	6940	LBN55120	\$85.00	40.98
6 x 144	6125	LBN60144	\$102.82	51.55



LU18  
3" x 1-5/8"



LU24  
3" x 3"

**Lynx®**  
A shelving industry promoted style featuring two inclined slots running parallel to each other on 3" centers up the entire length of the upright. Standard colors are gray uprights with yellow beams.

GALVANIZED WIRE DECKS				
Depth x Width	Capacity	Model #	List	Lbs.
36" x 46" x 3 channel	3,250	3646A3	\$36.36	18.58
36" x 52" x 3 channel	3,250	3652A3	\$38.89	20.09
36" x 58" x 4 channel	3,900	3658A4	\$45.51	23.83
42" x 46" x 3 channel	2,610	4246A3	\$40.71	21.40
42" x 52" x 3 channel	2,610	4252A3	\$43.57	23.11
42" x 58" x 4 channel	3,150	4258A4	\$51.12	27.48
48" x 46" x 3 channel	2,100	4846A3	\$45.71	24.61
48" x 52" x 3 channel	2,100	4852A3	\$48.99	26.57
48" x 58" x 4 channel	2,630	4858A4	\$57.53	31.61

ROW SPACERS			
Length	Model #	List	Lbs.
6"	I3506	\$7.93	0.87
8"	I3508	\$8.53	1.10
12"	I3512	\$9.94	1.55

WALL SPACERS			
Length	Model #	List	Lbs.
6"	I4006	\$7.26	0.87
8"	I4008	\$7.86	1.10
12"	I4012	\$9.27	1.55

CROSSBARS			
Depth	Model #	List	Lbs.
36"	A1036G	\$8.85	4.37
42"	A1042G	\$11.36	5.13

STANDARD POST PROTECTOR			
Height	Model #	List	Lbs.
18"	I5718-P	\$55.03	15.35

### GENERAL NOTES

1. Beam capacities are for uniformly distributed loads.
2. Beam capacities are based on a deflection specification of beam length/180 or on connector shear capacity, whichever is limiting.
3. Beams over 120" in length should be tied across the middle to prevent beam spread.
4. Beams over 90" that support loose decking should be tied across the middle to prevent beam spread.
5. Please call \_\_\_\_\_ for any beam spacing on an upright greater than 96".

1. Beam capacities are for uniformly distributed product loads. 2. Beam capacities are based on a deflection specification of beam length/180 or on connector shear capacity, whichever is limiting. 3. Beams over 120" in length should be tied across the middle to prevent beam spread. 4. Beams over 90" that support loose decking should be tied across the middle to prevent beam spread.