

# ROLLER RUNWAYS

**FULL WIDTH ROLLERS - STEEL AXLES AND FRAMES  
USE IN NEW OR EXISTING CARTON FLOW SHELVES**



## SPECIFICATIONS

### TRACK LENGTHS

Available in "to the inch" cut lengths from 2ft. to 12ft.


### TRACK WIDTHS

6", 9", 12", 15"

Nominal Width	6"	9"	12"	15"
Overall Width	6 1/2"	9 1/2"	12 1/2"	15 1/2"

### ROLLER CENTERS

1", 2", or 3"

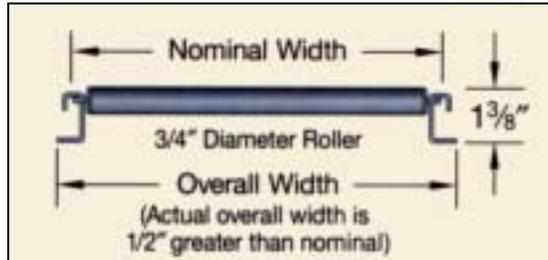

### ROLLER FEATURES

Full width, 3/4" diameter, aluminum, with steel axles.



### LOAD CAPACITY

Maximum capacity of a Roller Runway section is 50 lb. per ft. Overall capacity is determined by shelf frame.

## SELECTION GUIDE

### ROLLER CENTERS



Cartons with firm, flat bottoms flow well when supported by four rollers. Cartons with poor bottoms or heavier weights may require closer roller spacing.

### TRACK WIDTH

Cartons with firm, flat bottoms can be wider than track section.

### PITCH

Recommended pitch is 1 inch per foot. Test for product flow.



**Keneco, Inc.**