

# GL Series 180° Pallet Inverter

The GL Series offers pallet truck entry for fast, easy load transfers and product inversion.

- Chain-balanced, dual-clamping plates travel flush to the floor (no ramp required)
- Rear fork pockets for transportation, floor anchored for operation
- Control options range from standard pendant controls to fully automated systems
- Compact footprint best suited for staging areas near clean rooms and production areas or where forklift use is prohibited
- Easy load transfer from wood pallets to hygienic in-house production pallets
- Adjustable clamping pressure prevents crushing boxes, bags and drums




GROUND LEVEL LOADING WITH A MANUAL OR ELECTRIC-POWERED PALLET JACK



QUICKLY INVERT DRUMS TO MIX CONTENTS, PROHIBIT MOLD GROWTH, OR TRANSFER TO IN-HOUSE PALLETS



DUAL PLATES TRAVEL IN UNISON; NEAR-PERFECT CENTER BALANCE PROVIDES SMOOTH INVERSION OF TALL OR SHORT PARTIAL LOADS

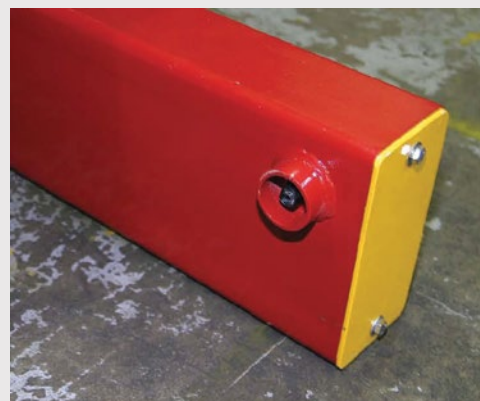

FOOT SWITCH PROTECTS FEET FROM PINCH POINT WHEN LOADING PLATE TRAVELS FLUSH TO THE FLOOR

Distributed by  
Dick Jones Sales, Inc.  
258 Baltimore St  
PO Box 141  
Hanover, PA 17331  
Phone 800-441-9955  
Fax 800-253-4036  
Email [dickjones@dickjonessales.com](mailto:dickjones@dickjonessales.com)



# GL Series Attributes & Specifications

- 78" wide x 81" tall x 95" deep
- 48" x 52" loading table size
- 5 to 7.5 horsepower motor
- Operates at 2,200 PSI of pressure
- Equipped to handle loads up to 4,400 lbs.
- 3 phase power source of 208/230/460/575V
- Machinery Red with UL Certified panels are both standard
- Six button pendant controls for safe and easy operation
- Shipping weight of 3,500-4,300 lbs.
- Commonly used in food, pharmaceutical, chemical, printing, distribution, and many other general industries

## GL Series

Series No.	<b>75</b>	<b>94</b>
Max Jaw Opening	93"	110"
Min Jaw Opening	25"	44"
Effective Jaw Opening	75"	94"

## MACHINE GUARDING



**STANDARD MACHINE GUARDING:** Provides protection from forklifts



**HIGH STYLE GUARDING:** Provides additional protection for forklift operators (mounted directly to the machine)



**BOSCH GUARDING:** Guarding which bolts directly to the floor with removable panels for maintenance access



**LIGHT CURTAINS:** Provides a soft guarding across the front of the machine for additional protection

## CONTROLS



**HMI OPERATOR INTERFACE:** Offers multiple screens for maintenance and pressure settings



**PUSH BUTTON:** For safe and easy operation (standard)



**CONSOLE:** Angle-top control with pedestal



**WIRELESS REMOTE:** Receiver mounts to machine

## MAINTENANCE



**LOCK OUT BAR:** Prevents plates from moving when maintenance is required



**LEVELING JACK PLATES:** Levels floor plate on uneven flooring

## OPTIONS



**CUSTOM PAINT FINISHES:** Stainless steel, food-grade Steel-It, and custom color match paint



**CUSTOM-SIZED TABLE:** Larger and smaller platforms available for custom-sized loads